

## Solution to Prob. 1:

(a) Time-shift doesn't affect autocorrelation

$$r_{y_2 y_2}[\ell] = r_{x_2 x_2}[\ell]$$

Hence, sequences are still complementary,  
i.e.,  $y_1[n]$  and  $y_2[n]$  are complementary

(b)  $x[n]$  and  $x^*[-n]$  have the same  
auto correlation due to commutativity  
of convolution  $\Rightarrow r_{y_1 y_1}[\ell] = r_{x_1 x_1}[\ell]$

$\Rightarrow y_1[n]$  and  $y_2[n]$  are complementary

$$(c) r_{y_1 y_1}[\ell] + r_{y_2 y_2}[\ell] =$$

$$e^{j\omega_0 \ell} \{ r_{x_1 x_1}[\ell] + r_{x_2 x_2}[\ell] \}$$

$$= e^{j\omega_0 \ell} - c \delta[\ell] = e^{j\omega_0 \ell} c \delta[\ell]$$

$$= c \delta[n]$$

$\Rightarrow y_1[n]$  and  $y_2[n]$  are complementary

## Prob. 1 Soln (cont.)

$$(d) y_1[n] = \frac{1}{2}(x_1[n] + x_2[n])$$

$$y_2[n] = \frac{1}{2}(x_1[n] - x_2[n])$$

$$r_{y_1 y_1}[\ell] = \frac{1}{4} \{ r_{x_1 x_1}[\ell] + r_{x_2 x_2}[\ell] \}$$

$$+ \frac{1}{4} r_{x_2 x_1}[\ell] + \frac{1}{4} r_{x_1 x_2}[\ell]$$

$$r_{y_2 y_2}[\ell] = \frac{1}{4} \{ r_{x_1 x_1}[\ell] + r_{x_2 x_2}[\ell] \}$$

$$+ \frac{1}{4} r_{x_1 x_2}[\ell] - \frac{1}{4} r_{x_2 x_1}[\ell]$$

$$r_{y_1 y_1}[\ell] + r_{y_2 y_2}[\ell] = \frac{1}{2} c_d[\ell]$$

$\Rightarrow$  complementary? Yes!

But now there are 3 possible values

for either  $y_1[n]$  and  $y_2[n]$ :  $\in \{-1, 0, 1\}$

$\Rightarrow$  so not unimodular Some values are zero

## Prob. 1 soln (cont.)

(e) Starting point:

$y_1[n]$  and  $y_2[n]$  are complementary

$$\text{Thus: } r_{z_1 z_1}[\ell] + r_{z_2 z_2}[\ell]$$

$$= 2 \{ r_{y_1 y_1}[\ell] + r_{y_2 y_2}[\ell] \}$$

$$+ r_{y_1 y_2}[\ell] + r_{y_2 y_1}[\ell]$$

$$- r_{y_1 y_2}[\ell] - r_{y_2 y_1}[\ell]$$

$$= \cancel{\epsilon} \delta[\ell]$$

$\Rightarrow$  complementary? Yes.

And now  $z_1[n]$  and  $z_2[n]$  are sequences of  $+1$ 's and  $-1$ 's

whenever  $y_1[n] = 1$  or  $-1 \Rightarrow y_2[n] = 0$

$y_2[n] = 1$  or  $-1 \Rightarrow y_1[n] = 0$

From Fall 2013 Exam 1, we know:

(f)

$$r_{y_1 y_1}[\ell] = r_{x_1 x_1}[\ell] + r_{x_2 x_2}[\ell]$$

$$+ r_{x_1 x_2}[\ell+N] + r_{x_2 x_1}[\ell-N]$$

$$r_{y_2 y_2}[\ell] = r_{x_1 x_1}[\ell] + r_{x_2 x_2}[\ell]$$

$$\cancel{- r_{x_1 x_2}[\ell+N] - r_{x_2 x_1}[\ell-N]}$$

Sum is:  $2 \leq \delta[\ell] = r_{y_1 y_1}[\ell] + r_{y_2 y_2}[\ell]$

- The sequences do not overlap and are right up against each other


$y_1[n]$  is unimodular } sequences  
 $y_2[n]$  is unimodular } of +1's and -1's

## Prob. 2 (soln) Solution

(a)

$$\frac{Y(z)}{X(z)} = \frac{\frac{1}{z} + z^{-1}}{2 + \frac{1}{2}z^{-1}} \cdot \frac{z}{z} = \frac{\frac{1}{z}z + 1}{z + \frac{1}{2}}$$

zero at  $z = -2$  } all-pass  
 pole at  $z = -\frac{1}{2}$  } filter

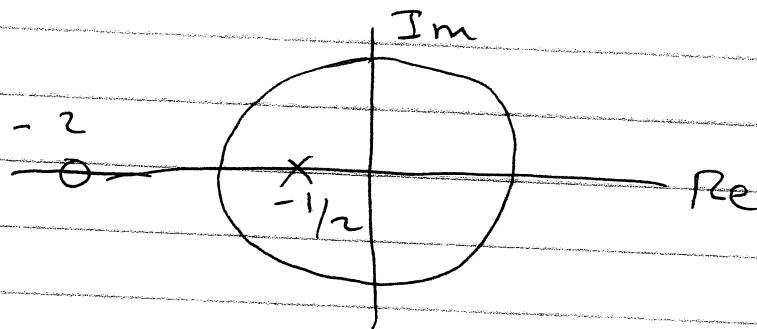

$$(b) \frac{\frac{1}{z}z}{z + \frac{1}{2}} + z^{-1} \frac{z}{z + \frac{1}{2}}$$

note:

$$\left(-\frac{1}{2}\right)^n \left(-\frac{1}{2}\right)^{-1} = -2 \left(-\frac{1}{2}\right)^n$$


$$\Rightarrow h[n] = \frac{1}{2} \left(-\frac{1}{2}\right)^n u[n]$$

$$+ \left(-\frac{1}{2}\right)^{n-1} u[n-1]$$

$$= \frac{1}{2} \delta[n] + \left(\frac{1}{2} - 2\right) \left(-\frac{1}{2}\right)^n u[n-1]$$

$$= \frac{1}{2} \delta[n] - \frac{3}{2} \left(-\frac{1}{2}\right)^n u[n-1]$$

$$= +2 \left\{ \delta[n] + \left(-\frac{3}{4}\right) \left(-\frac{1}{2}\right)^n u[n] \right\}$$

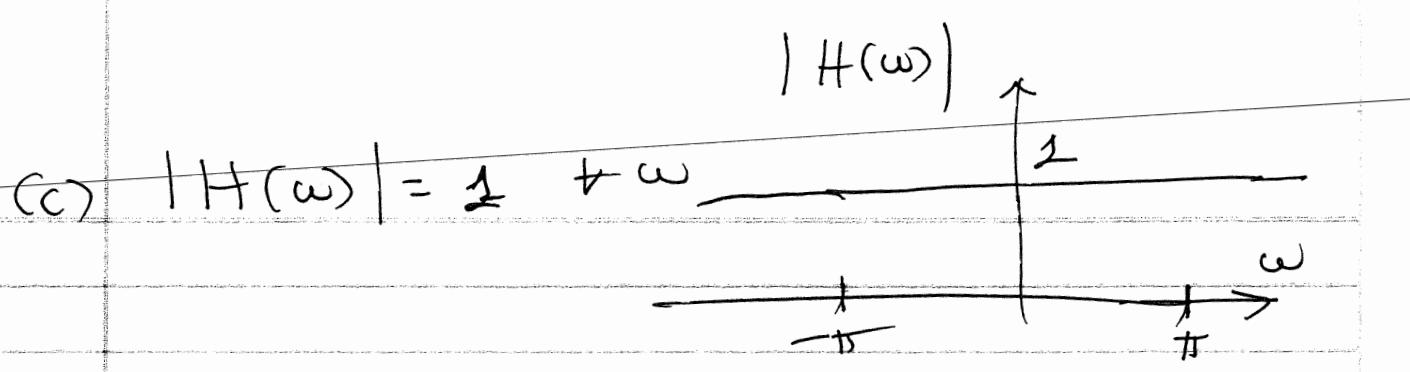

(d)  $H(\omega)$  is nonlinear

but  $|H(\omega)| = 1 + \omega$  thus:

$$A_0 = 2 \quad A_1 = 1 \quad A_2 = \sqrt{2} \quad A_3 = 3$$

amplitudes of the sinewaves are unchanged  $\Rightarrow$  as they pass thru all-pass filter

BUT phases change  $\Rightarrow$

$$Y[n] \neq X[n]$$

(e)  $X[n] = \frac{1}{\rho} \{ \delta[n] + (\rho^2)^n u[n] \}$   
 $\Rightarrow$  all-pass signal

$$r_{xx}[k] = \delta[k] \underbrace{\delta[k]}_{\delta[k]}$$

(f)  $r_{yx}[k] = h[k] * r_{xx}[k]$   
 $= h[k] = 2 \left\{ \delta[k] - \frac{3}{4} \left( \frac{-1}{2} \right)^k u[k] \right\}$

$$r_{yy}(\ell) = r_{xx}(\ell) * \underbrace{r_{hh}(\ell)}_{f(\ell)}$$

$$= r_{xx}(\ell)$$

$$2 \quad 1 \quad 1 \quad -1 \quad 1$$

$$\ell=0 \Rightarrow 5$$

$$1 \quad 1 \quad 1 \quad -1$$

$$\ell=1 \Rightarrow 0$$

$$+ \quad 1 \quad 1 \quad 1$$

$$\ell=2 \Rightarrow 1$$

$$1 \quad 1$$

$$\ell=3 \Rightarrow 0$$

$$1$$

$$\ell=4 \Rightarrow 1$$

$$r_{yy}(\ell) = r_{xx}(\ell)$$

$$= \left\{ 1, 0, 2, 0, 5, 0, 1, 0, 1 \right\}$$

$$\ell=0$$