

Lecture 23

Scalar and Vector Potentials

23.1 Scalar and Vector Potentials for Time-Harmonic Fields

23.1.1 Introduction

Previously, we have studied the use of scalar potential Φ for electrostatic problems. Then we learnt the use of vector potential \mathbf{A} for magnetostatic problems. Now, we will study the combined use of scalar and vector potential for solving time-harmonic (electrodynamic) problems.

This is important for bridging the gap between static regime where the frequency is zero or low, and dynamic regime where the frequency is not low. For the dynamic regime, it is important to understand the radiation of electromagnetic fields. Electrodynamic regime is important for studying antennas, communications, sensing, wireless power transfer applications, and many more. Hence, it is imperative that we understand how time-varying electromagnetic fields radiate from sources.

It is also important to understand when static or circuit (quasi-static) regimes are important. The circuit regime solves problems that have fueled the microchip industry, and it is hence imperative to understand when electromagnetic problems can be approximated with simple circuit problems and solved using simple laws such as KCL and KVL.

23.1.2 Scalar and Vector Potentials for Statics, A Review

Previously, we have studied scalar and vector potentials for electrostatics and magnetostatics where the frequency ω is identically zero. The four Maxwell's equations for a homogeneous

medium are then

$$\nabla \times \mathbf{E} = 0 \quad (23.1.1)$$

$$\nabla \times \mathbf{H} = \mathbf{J} \quad (23.1.2)$$

$$\nabla \cdot \varepsilon \mathbf{E} = \rho \quad (23.1.3)$$

$$\nabla \cdot \mu \mathbf{H} = 0 \quad (23.1.4)$$

Using the knowledge that $\nabla \times \nabla \Phi = 0$, we can construct a solution to (23.1.1) easily. Thus, in order to satisfy the first of Maxwell's equations or Faraday's law above, we let

$$\mathbf{E} = -\nabla \Phi \quad (23.1.5)$$

Using the above in (23.1.3), we get, for a homogeneous medium, that

$$\nabla^2 \Phi = -\frac{\rho}{\varepsilon} \quad (23.1.6)$$

which is the Poisson's equation for electrostatics.

By letting

$$\mu \mathbf{H} = \nabla \times \mathbf{A} \quad (23.1.7)$$

since $\nabla \cdot (\nabla \times \mathbf{A}) = 0$, the last of Maxwell's equations above will be automatically satisfied. And using the above in the second of Maxwell's equations above, we get

$$\nabla \times \nabla \times \mathbf{A} = \mu \mathbf{J} \quad (23.1.8)$$

Now, using the fact that $\nabla \times \nabla \times \mathbf{A} = \nabla(\nabla \cdot \mathbf{A}) - \nabla^2 \mathbf{A}$, and Coulomb's gauge that $\nabla \cdot \mathbf{A} = 0$, we arrive at

$$\nabla^2 \mathbf{A} = -\mu \mathbf{J} \quad (23.1.9)$$

which is the vector Poisson's equation. Next, we will repeat the above derivation when $\omega \neq 0$.

23.1.3 Scalar and Vector Potentials for Electrodynamics

To this end, we will start with frequency domain Maxwell's equations with sources \mathbf{J} and ρ included, and later see how these sources \mathbf{J} and ρ can radiate electromagnetic fields. Maxwell's equations in the frequency domain are

$$\nabla \times \mathbf{E} = -j\omega \mu \mathbf{H} \quad (23.1.10)$$

$$\nabla \times \mathbf{H} = j\omega \varepsilon \mathbf{E} + \mathbf{J} \quad (23.1.11)$$

$$\nabla \cdot \mu \mathbf{H} = 0 \quad (23.1.12)$$

$$\nabla \cdot \varepsilon \mathbf{E} = \rho \quad (23.1.13)$$

In order to satisfy the third Maxwell's equation, as before, we let

$$\mu \mathbf{H} = \nabla \times \mathbf{A} \quad (23.1.14)$$

Now, using (23.1.14) in (23.1.10), we have

$$\nabla \times (\mathbf{E} + j\omega\mathbf{A}) = 0 \quad (23.1.15)$$

Since $\nabla \times (\nabla\Phi) = 0$, the above implies that

$$\mathbf{E} = -\nabla\Phi - j\omega\mathbf{A} \quad (23.1.16)$$

The above implies that the electrostatic theory of $\mathbf{E} = -\nabla\Phi$ is not exactly correct when $\omega \neq 0$. The second term above, in accordance to Faraday's law, is the contribution to the electric field from the time-varying magnetic field, and hence, is the induction term.¹

Furthermore, the above shows that given \mathbf{A} and Φ , one can determine the fields \mathbf{H} and \mathbf{E} . To this end, we will derive equations for \mathbf{A} and Φ in terms of the sources \mathbf{J} and ρ which are given. Substituting (23.1.14) and (23.1.16) into (23.1.11) gives

$$\nabla \times \nabla \times \mathbf{A} = -j\omega\mu\epsilon(-j\omega\mathbf{A} - \nabla\Phi) + \mu\mathbf{J} \quad (23.1.17)$$

Or upon rearrangement, after using that $\nabla \times \nabla \times \mathbf{A} = \nabla\nabla \cdot \mathbf{A} - \nabla \cdot \nabla\mathbf{A}$, we have

$$\nabla^2\mathbf{A} + \omega^2\mu\epsilon\mathbf{A} = -\mu\mathbf{J} + j\omega\mu\epsilon\nabla\Phi + \nabla\nabla \cdot \mathbf{A} \quad (23.1.18)$$

Moreover, using (23.1.16) in (23.1.13), we have

$$\nabla \cdot (j\omega\mathbf{A} + \nabla\Phi) = -\frac{\rho}{\epsilon} \quad (23.1.19)$$

In the above, (23.1.18) and (23.1.19) represent two equations for the two unknowns \mathbf{A} and Φ , expressed in terms of the known quantities, the sources \mathbf{J} and ρ which are given. But these equations are coupled to each other. They look complicated and are rather difficult to solve at this point.

As in the magnetostatic case, the vector potential \mathbf{A} is not unique. One can always construct a new $\mathbf{A}' = \mathbf{A} + \nabla\Psi$ that produces the same magnetic field $\mu\mathbf{H}$, since $\nabla \times \nabla\Psi = 0$. It is quite clear that $\mu\mathbf{H} = \nabla \times \mathbf{A} = \nabla \times \mathbf{A}'$. This implies that \mathbf{A} is not unique, and one can further show that Φ is also non-unique.

To make them unique, in addition to specifying what $\nabla \times \mathbf{A}$ should be in (23.1.14), we need to specify its divergence or $\nabla \cdot \mathbf{A}$ as in the electrostatic case.² A clever way to specify the divergence of \mathbf{A} is to make it simplify the complicated equations above in (23.1.18). We choose a gauge so that the last two terms in the equation will cancel each other. Therefore, we specify

$$\nabla \cdot \mathbf{A} = -j\omega\mu\epsilon\Phi \quad (23.1.20)$$

The above is judiciously chosen so that the pertinent equations (23.1.18) and (23.1.19) will be simplified and decoupled. Then they become

$$\nabla^2\mathbf{A} + \omega^2\mu\epsilon\mathbf{A} = -\mu\mathbf{J} \quad (23.1.21)$$

$$\nabla^2\Phi + \omega^2\mu\epsilon\Phi = -\frac{\rho}{\epsilon} \quad (23.1.22)$$

¹Notice that in electrical engineering, most concepts related to magnetic fields are inductive!

²This is akin to that given a vector \mathbf{A} , and an arbitrary vector \mathbf{k} , in addition to specifying what $\mathbf{k} \times \mathbf{A}$ is, it is also necessary to specify what $\mathbf{k} \cdot \mathbf{A}$ is to uniquely specify \mathbf{A} .

Equation (23.1.20) is known as the Lorenz gauge³ and the above equations are Helmholtz equations with source terms. Not only are these equations simplified, they can be solved independently of each other since they are decoupled from each other.

Equations (23.1.21) and (23.1.22) can be solved using the Green's function method. Equation (23.1.21) actually implies three scalar equations for the three x, y, z components, namely that

$$\nabla^2 A_i + \omega^2 \mu \varepsilon A_i = -\mu J_i \quad (23.1.23)$$

where i above can be $x, y,$ or z . Therefore, (23.1.21) and (23.1.22) together constitute four scalar equations similar to each other. Hence, we need only to solve their point-source response, or the Green's function of these equations by solving

$$\nabla^2 g(\mathbf{r}, \mathbf{r}') + \beta^2 g(\mathbf{r}, \mathbf{r}') = -\delta(\mathbf{r} - \mathbf{r}') \quad (23.1.24)$$

where $\beta^2 = \omega^2 \mu \varepsilon$.

Previously, we have shown that when $\beta = 0$,

$$g(\mathbf{r}, \mathbf{r}') = g(|\mathbf{r} - \mathbf{r}'|) = \frac{1}{4\pi|\mathbf{r} - \mathbf{r}'|}$$

When $\beta \neq 0$, the correct solution is

$$g(\mathbf{r}, \mathbf{r}') = g(|\mathbf{r} - \mathbf{r}'|) = \frac{e^{-j\beta|\mathbf{r} - \mathbf{r}'|}}{4\pi|\mathbf{r} - \mathbf{r}'|} \quad (23.1.25)$$

which can be verified by back substitution.

By using the principle of linear superposition, or convolution, the solutions to (23.1.21) and (23.1.22) are then

$$\mathbf{A}(\mathbf{r}) = \mu \iiint d\mathbf{r}' \mathbf{J}(\mathbf{r}') \frac{e^{-j\beta|\mathbf{r} - \mathbf{r}'|}}{4\pi|\mathbf{r} - \mathbf{r}'|} \quad (23.1.26)$$

$$\Phi(\mathbf{r}) = \frac{1}{\varepsilon} \iiint d\mathbf{r}' \varrho(\mathbf{r}') \frac{e^{-j\beta|\mathbf{r} - \mathbf{r}'|}}{4\pi|\mathbf{r} - \mathbf{r}'|} \quad (23.1.27)$$

In the above $d\mathbf{r}'$ is the shorthand notation for $dx dy dz$ and hence, they are still volume integrals.

23.1.4 More on Scalar and Vector Potentials

It is to be noted that Maxwell's equations are symmetrical and this is especially so when we add a magnetic current \mathbf{M} to Maxwell's equations and magnetic charge ϱ_m to Gauss's law.⁴ Then the equations become

$$\nabla \times \mathbf{E} = -j\omega\mu\mathbf{H} - \mathbf{M} \quad (23.1.28)$$

$$\nabla \times \mathbf{H} = j\omega\varepsilon\mathbf{E} + \mathbf{J} \quad (23.1.29)$$

$$\nabla \cdot \mu\mathbf{H} = \varrho_m \quad (23.1.30)$$

$$\nabla \cdot \varepsilon\mathbf{E} = \varrho \quad (23.1.31)$$

³Please note that this Lorenz is not the same as Lorentz.

⁴In fact, Maxwell exploited this symmetry [122].

The above can be solved in two stages, using the principle of linear superposition. First, we can set $\mathbf{M} = 0$ and $\rho_m = 0$ and solve for the fields as we have done. Second, we can set $\mathbf{J} = 0$ and $\rho = 0$ and solve for the fields next. Then the total general solution is just the linear superposition of these two solutions.

For the second case, we can define an electric vector potential \mathbf{F} such that

$$\mathbf{D} = -\nabla \times \mathbf{F} \quad (23.1.32)$$

and a magnetic scalar potential Φ_m such that

$$\mathbf{H} = -\nabla\Phi_m - j\omega\mathbf{F} \quad (23.1.33)$$

By invoking duality principle, one can gather that [41]

$$\mathbf{F}(\mathbf{r}) = \varepsilon \iiint d\mathbf{r}' \mathbf{M}(\mathbf{r}') \frac{e^{-j\beta|\mathbf{r}-\mathbf{r}'|}}{4\pi|\mathbf{r}-\mathbf{r}'|} \quad (23.1.34)$$

$$\Phi_m(\mathbf{r}) = \frac{1}{\mu} \iiint d\mathbf{r}' \rho_m(\mathbf{r}') \frac{e^{-j\beta|\mathbf{r}-\mathbf{r}'|}}{4\pi|\mathbf{r}-\mathbf{r}'|} \quad (23.1.35)$$

As mentioned before, even though magnetic sources do not exist, they can be engineered. In many engineering designs, it is more expeditious to think magnetic sources to enrich the diversity of electromagnetic technologies.

23.2 When is Static Electromagnetic Theory Valid?

We have learnt in the previous section that for electrodynamics,

$$\mathbf{E} = -\nabla\Phi - j\omega\mathbf{A} \quad (23.2.1)$$

where the second term above on the right-hand side is due to induction, or the contribution to the electric field from the time-varying magnetic field. Hence, much things we learn in potential theory that $\mathbf{E} = -\nabla\Phi$ is not exactly valid. But simple potential theory that $\mathbf{E} = -\nabla\Phi$ is very useful because of its simplicity. We will study when static electromagnetic theory can be used to model electromagnetic systems. Since the third and the fourth Maxwell's equations are derivable from the first two, let us first study when we can ignore the time derivative terms in the first two of Maxwell's equations, which, in the frequency domain, are

$$\nabla \times \mathbf{E} = -j\omega\mu\mathbf{H} \quad (23.2.2)$$

$$\nabla \times \mathbf{H} = j\omega\varepsilon\mathbf{E} + \mathbf{J} \quad (23.2.3)$$

When the terms multiplied by $j\omega$ above can be ignored, then electrodynamics can be replaced with static electromagnetics, which are much simpler. That is why Ampere's law, Coulomb's law, and Gauss' law were discovered first. Quasi-static electromagnetic theory eventually gave rise to circuit theory and telegraphy technology. Circuit theory consists of elements like resistors, capacitors, and inductors. Given that we have now seen electromagnetic theory in

its full form, we like to ponder when we can use simple static electromagnetics to describe electromagnetic phenomena.

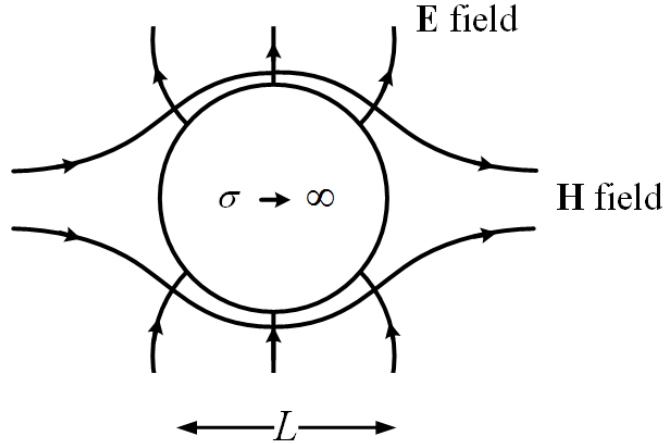


Figure 23.1: The electric and magnetic fields are great contortionists around a conducting particle deforming themselves to satisfy the boundary conditions even when the particle is very small. Hence, $\nabla \sim 1/L$.

To see this lucidly, it is best to write Maxwell's equations in dimensionless units or the same units. Say if we want to solve Maxwell's equations for the fields close to an object of size L as shown in Figure 23.1. This object can be a small particle like the sphere, or it could be a capacitor, or an inductor, which are small; but how small should it be before we can apply static electromagnetics?

It is clear that these \mathbf{E} and \mathbf{H} fields will have to satisfy boundary conditions, which is *de rigueur* in the vicinity of the object as shown in Figure 23.1 even when the frequency is low or the wavelength long. The fields become great contortionists in order to do so. Hence, we do not expect a constant field around the object but that the field will vary on the length scale of L . So we renormalize our length scale by this length L by defining a new dimensionless coordinate system such that.

$$x' = \frac{x}{L}, \quad y' = \frac{y}{L}, \quad z' = \frac{z}{L} \quad (23.2.4)$$

In other words, by so doing, then $Ldx' = dx$, $Ldy' = dy$, and $Ldz' = dz$, and

$$\frac{\partial}{\partial x} = \frac{1}{L} \frac{\partial}{\partial x'}, \quad \frac{\partial}{\partial y} = \frac{1}{L} \frac{\partial}{\partial y'}, \quad \frac{\partial}{\partial z} = \frac{1}{L} \frac{\partial}{\partial z'} \quad (23.2.5)$$

In this manner, $\nabla = \frac{1}{L} \nabla'$ where ∇' is dimensionless; or ∇ will be very large when it operates on fields that vary on the length scale of very small L , where ∇' will not be large because it is in coordinates normalized with respect to L .

Then, the first two of Maxwell's equations become

$$\frac{1}{L} \nabla' \times \mathbf{E} = -j\omega\mu_0 \mathbf{H} \quad (23.2.6)$$

$$\frac{1}{L} \nabla' \times \mathbf{H} = j\omega\varepsilon_0 \mathbf{E} + \mathbf{J} \quad (23.2.7)$$

Here, we still have apples and oranges to compare with since \mathbf{E} and \mathbf{H} have different units; we cannot compare quantities if they have different units. For instance, the ratio of \mathbf{E} to the \mathbf{H} field has a dimension of impedance. To bring them to the same unit, we define a new \mathbf{E}' such that

$$\eta_0 \mathbf{E}' = \mathbf{E} \quad (23.2.8)$$

where $\eta_0 = \sqrt{\mu_0/\varepsilon_0} \cong 377$ ohms in vacuum. In this manner, the new \mathbf{E}' has the same unit as the \mathbf{H} field. Then, (23.2.6) and (23.2.7) become

$$\frac{\eta_0}{L} \nabla' \times \mathbf{E}' = -j\omega\mu_0 \mathbf{H} \quad (23.2.9)$$

$$\frac{1}{L} \nabla' \times \mathbf{H} = j\omega\varepsilon_0 \eta_0 \mathbf{E}' + \mathbf{J} \quad (23.2.10)$$

With this change, the above can be rearranged to become

$$\nabla' \times \mathbf{E}' = -j\omega\mu_0 \frac{L}{\eta_0} \mathbf{H} \quad (23.2.11)$$

$$\nabla' \times \mathbf{H} = j\omega\varepsilon_0 \eta_0 L \mathbf{E}' + L \mathbf{J} \quad (23.2.12)$$

By letting $\eta_0 = \sqrt{\mu_0/\varepsilon_0}$, the above can be further simplified to become

$$\nabla' \times \mathbf{E}' = -j \frac{\omega}{c_0} L \mathbf{H} \quad (23.2.13)$$

$$\nabla' \times \mathbf{H} = j \frac{\omega}{c_0} L \mathbf{E}' + L \mathbf{J} \quad (23.2.14)$$

Notice now that in the above, \mathbf{H} , \mathbf{E}' , and $L\mathbf{J}$ have the same unit, and ∇' is dimensionless and is of order one, and $\omega L/c_0$ is also dimensionless.

Therefore, one can compare terms, and ignore the frequency dependent $j\omega$ term when

$$\frac{\omega}{c_0} L \ll 1 \quad (23.2.15)$$

or when

$$2\pi \frac{L}{\lambda_0} \ll 1 \quad (23.2.16)$$

Consequently, the above criteria are for the validity of the static approximation when the time-derivative terms in Maxwell's equations can be ignored. When these criteria are satisfied, then Maxwell's equations can be simplified to and approximated by the following equations

$$\nabla' \times \mathbf{E}' = 0 \quad (23.2.17)$$

$$\nabla' \times \mathbf{H} = L\mathbf{J} \quad (23.2.18)$$

which are the static equations, Faraday's law and Ampere's law of electromagnetic theory. They can be solved together with Gauss' laws.

In other words, one can solve, even in optics, where ω is humongous or the wavelength very short, using static analysis if the size of the object L is much smaller than the optical wavelength. This is illustrated in the field of nano-optics with a plasmonic nanoparticle. If the particle is small enough compared to wavelength of the light, electrostatic analysis can be used. For instance, the wavelength of blue light is about 400 nm, and 10 nm nano-particles can be made. (Even the ancient Romans could make them!) And hence, static electromagnetic theory can be used to analyze the wave-particle interaction. This was done in one of the homeworks. Figure 23.2 shows an incident light whose wavelength is much longer than the size of the particle. The incident field induces an electric dipole moment on the particle, whose external field can be written as

$$\mathbf{E}_s = (\hat{r}2 \cos \theta + \hat{\theta} \sin \theta) \left(\frac{a}{r}\right)^3 E_s \quad (23.2.19)$$

while the incident field and the interior field to the particle can be expressed as

$$\mathbf{E}_0 = \hat{z}E_0 = (\hat{r} \cos \theta - \hat{\theta} \sin \theta)E_0 \quad (23.2.20)$$

$$\mathbf{E}_i = \hat{z}E_i = (\hat{r} \cos \theta - \hat{\theta} \sin \theta)E_i \quad (23.2.21)$$

By matching boundary conditions, as was done in the homework, it can be shown that

$$E_s = \frac{\varepsilon_s - \varepsilon}{\varepsilon_s + 2\varepsilon} E_0 \quad (23.2.22)$$

$$E_i = \frac{3\varepsilon}{\varepsilon_s + 2\varepsilon} E_0 \quad (23.2.23)$$

For a plasmonic nano-particle, the particle medium behaves like a plasma, and ε_s in the above can be negative, making the denominators of the above expression close to zero. Therefore, the amplitude of the internal and scattered fields can be very large when this happens, and the nano-particles will glitter in the presence of light.

Figure 23.3 shows a nano-particle induced in plasmonic oscillation by a light wave. Figure 23.4 shows that different color fluids can be obtained by immersing nano-particles in fluids with different background permittivity causing the plasmonic particles to resonate at different frequencies.

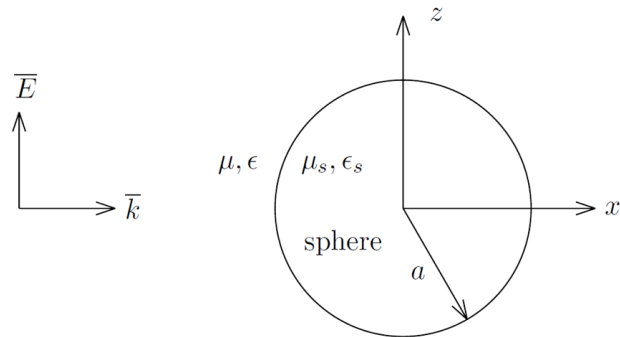


Figure 23.2: A plane electromagnetic wave incident on a particle. When the particle size is small compared to wavelength, static analysis can be used to solve this problem (courtesy of Kong [31]).

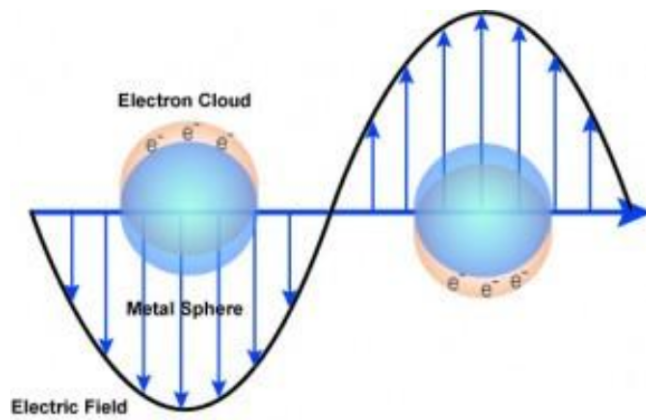


Figure 23.3: A nano-particle undergoing electromagnetic oscillation when an electromagnetic wave impinges on it (courtesy of sigmaaldric.com).



Figure 23.4: Different color fluids containing nano-particles can be obtained by changing the permittivity of the background fluids (courtesy of nanocomposix.com).

In (23.2.16), this criterion has been expressed in terms of the dimension of the object L compared to the wavelength λ_0 . Alternatively, we can express this criterion in terms of transit time. The transit time for an electromagnetic wave to traverse an object of size L is $\tau = L/c_0$ and $\omega = 2\pi/T$ where T is the period of one time-harmonic oscillation. Hence, (23.2.15) can be re-expressed as

$$\frac{2\pi\tau}{T} \ll 1 \quad (23.2.24)$$

The above implies that if the transit time τ needed for the electromagnetic field to traverse the object of length L is much smaller than the period of oscillation of the electromagnetic field, then static theory can be used.

The finite speed of light gives rise to delay or retardation of electromagnetic signal when it propagates through space. When this retardation effect can be ignored, then static electromagnetic theory can be used. In other words, if the speed of light had been infinite, then there would be no retardation effect, and static electromagnetic theory could always be used. Alternatively, the infinite speed of light will give rise to infinite wavelength, and criterion (23.2.16) will always be satisfied, and static theory prevails.

23.2.1 Quasi-Static Electromagnetic Theory

In closing, we would like to make one more remark. The right-hand side of (23.2.11), which is Faraday's law, is essential for capturing the physical mechanism of an inductor and flux linkage. And yet, if we drop it, there will be no inductor in this world. To understand this dilemma, let us rewrite (23.2.11) in integral form, namely,

$$\oint_C \mathbf{E}' \cdot d\mathbf{l} = -j\omega\mu_0 \frac{L}{\eta_0} \iint_S d\mathbf{S} \cdot \mathbf{H} \quad (23.2.25)$$

In the inductor, the right-hand side has been amplified by multiple turns, effectively increasing S , the flux linkage area. Or one can think of an inductor as having a much longer effective length L_{eff} when untwined so as to compensate for decreasing frequency ω . Hence, the importance of flux linkage or the inductor in circuit theory is not diminished unless $\omega = 0$.

By the same token, displacement current can be enlarged by using capacitors. In this case, even when no electric current \mathbf{J} flows through the capacitor, displacement current flows and the generalized Ampere's law becomes

$$\oint_C \mathbf{H} \cdot d\mathbf{l} = j\omega\epsilon\eta_0 L \iint_S d\mathbf{S} \cdot \mathbf{E}' \quad (23.2.26)$$

The displacement in a capacitor cannot be ignored unless $\omega = 0$. Therefore, when $\omega \neq 0$, or in quasi-static case, inductors and capacitors in circuit theory are important as we shall study next. In summary, the full physics of Maxwell's equations is not lost in circuit theory: the induction term in Faraday's law, and the displacement current in Ampere's law are still retained. That explains the success of circuit theory in electromagnetic engineering!

Bibliography

- [1] J. A. Kong, *Theory of electromagnetic waves*. New York, Wiley-Interscience, 1975.
- [2] A. Einstein *et al.*, “On the electrodynamics of moving bodies,” *Annalen der Physik*, vol. 17, no. 891, p. 50, 1905.
- [3] P. A. M. Dirac, “The quantum theory of the emission and absorption of radiation,” *Proceedings of the Royal Society of London. Series A, Containing Papers of a Mathematical and Physical Character*, vol. 114, no. 767, pp. 243–265, 1927.
- [4] R. J. Glauber, “Coherent and incoherent states of the radiation field,” *Physical Review*, vol. 131, no. 6, p. 2766, 1963.
- [5] C.-N. Yang and R. L. Mills, “Conservation of isotopic spin and isotopic gauge invariance,” *Physical review*, vol. 96, no. 1, p. 191, 1954.
- [6] G. t’Hooft, *50 years of Yang-Mills theory*. World Scientific, 2005.
- [7] C. W. Misner, K. S. Thorne, and J. A. Wheeler, *Gravitation*. Princeton University Press, 2017.
- [8] F. Teixeira and W. C. Chew, “Differential forms, metrics, and the reflectionless absorption of electromagnetic waves,” *Journal of Electromagnetic Waves and Applications*, vol. 13, no. 5, pp. 665–686, 1999.
- [9] W. C. Chew, E. Michielssen, J.-M. Jin, and J. Song, *Fast and efficient algorithms in computational electromagnetics*. Artech House, Inc., 2001.
- [10] A. Volta, “On the electricity excited by the mere contact of conducting substances of different kinds. in a letter from Mr. Alexander Volta, FRS Professor of Natural Philosophy in the University of Pavia, to the Rt. Hon. Sir Joseph Banks, Bart. KBPR S,” *Philosophical transactions of the Royal Society of London*, no. 90, pp. 403–431, 1800.
- [11] A.-M. Ampère, *Exposé méthodique des phénomènes électro-dynamiques, et des lois de ces phénomènes*. Bachelier, 1823.
- [12] —, *Mémoire sur la théorie mathématique des phénomènes électro-dynamiques uniquement déduite de l’expérience: dans lequel se trouvent réunis les Mémoires que M. Ampère a communiqués à l’Académie royale des Sciences, dans les séances des 4 et*

26 décembre 1820, 10 juin 1822, 22 décembre 1823, 12 septembre et 21 novembre 1825. Bachelier, 1825.

- [13] B. Jones and M. Faraday, *The life and letters of Faraday*. Cambridge University Press, 2010, vol. 2.
- [14] G. Kirchhoff, “Ueber die auflösung der gleichungen, auf welche man bei der untersuchung der linearen vertheilung galvanischer ströme geführt wird,” *Annalen der Physik*, vol. 148, no. 12, pp. 497–508, 1847.
- [15] L. Weinberg, “Kirchhoff’s’ third and fourth laws’,” *IRE Transactions on Circuit Theory*, vol. 5, no. 1, pp. 8–30, 1958.
- [16] T. Standage, *The Victorian Internet: The remarkable story of the telegraph and the nineteenth century’s online pioneers*. Phoenix, 1998.
- [17] J. C. Maxwell, “A dynamical theory of the electromagnetic field,” *Philosophical transactions of the Royal Society of London*, no. 155, pp. 459–512, 1865.
- [18] H. Hertz, “On the finite velocity of propagation of electromagnetic actions,” *Electric Waves*, vol. 110, 1888.
- [19] M. Romer and I. B. Cohen, “Roemer and the first determination of the velocity of light (1676),” *Isis*, vol. 31, no. 2, pp. 327–379, 1940.
- [20] A. Arons and M. Peppard, “Einstein’s proposal of the photon concept—a translation of the Annalen der Physik paper of 1905,” *American Journal of Physics*, vol. 33, no. 5, pp. 367–374, 1965.
- [21] A. Pais, “Einstein and the quantum theory,” *Reviews of Modern Physics*, vol. 51, no. 4, p. 863, 1979.
- [22] M. Planck, “On the law of distribution of energy in the normal spectrum,” *Annalen der physik*, vol. 4, no. 553, p. 1, 1901.
- [23] Z. Peng, S. De Graaf, J. Tsai, and O. Astafiev, “Tuneable on-demand single-photon source in the microwave range,” *Nature communications*, vol. 7, p. 12588, 2016.
- [24] B. D. Gates, Q. Xu, M. Stewart, D. Ryan, C. G. Willson, and G. M. Whitesides, “New approaches to nanofabrication: molding, printing, and other techniques,” *Chemical reviews*, vol. 105, no. 4, pp. 1171–1196, 2005.
- [25] J. S. Bell, “The debate on the significance of his contributions to the foundations of quantum mechanics, Bells Theorem and the Foundations of Modern Physics (A. van der Merwe, F. Selleri, and G. Tarozzi, eds.),” 1992.
- [26] D. J. Griffiths and D. F. Schroeter, *Introduction to quantum mechanics*. Cambridge University Press, 2018.
- [27] C. Pickover, *Archimedes to Hawking: Laws of science and the great minds behind them*. Oxford University Press, 2008.

- [28] R. Resnick, J. Walker, and D. Halliday, *Fundamentals of physics*. John Wiley, 1988.
- [29] S. Ramo, J. R. Whinnery, and T. Duzer van, *Fields and waves in communication electronics, Third Edition*. John Wiley & Sons, Inc., 1995.
- [30] J. L. De Lagrange, “Recherches d’arithmétique,” *Nouveaux Mémoires de l’Académie de Berlin*, 1773.
- [31] J. A. Kong, *Electromagnetic Wave Theory*. EMW Publishing, 2008.
- [32] H. M. Schey, *Div, grad, curl, and all that: an informal text on vector calculus*. WW Norton New York, 2005.
- [33] R. P. Feynman, R. B. Leighton, and M. Sands, *The Feynman lectures on physics, Vols. I, II, & III: The new millennium edition*. Basic books, 2011, vol. 1,2,3.
- [34] W. C. Chew, *Waves and fields in inhomogeneous media*. IEEE press, 1995.
- [35] V. J. Katz, “The history of Stokes’ theorem,” *Mathematics Magazine*, vol. 52, no. 3, pp. 146–156, 1979.
- [36] W. K. Panofsky and M. Phillips, *Classical electricity and magnetism*. Courier Corporation, 2005.
- [37] T. Lancaster and S. J. Blundell, *Quantum field theory for the gifted amateur*. OUP Oxford, 2014.
- [38] W. C. Chew, “Fields and waves: Lecture notes for ECE 350 at UIUC,” <https://engineering.purdue.edu/wcchew/ece350.html>, 1990.
- [39] C. M. Bender and S. A. Orszag, *Advanced mathematical methods for scientists and engineers I: Asymptotic methods and perturbation theory*. Springer Science & Business Media, 2013.
- [40] J. M. Crowley, *Fundamentals of applied electrostatics*. Krieger Publishing Company, 1986.
- [41] C. Balanis, *Advanced Engineering Electromagnetics*. Hoboken, NJ, USA: Wiley, 2012.
- [42] J. D. Jackson, *Classical electrodynamics*. John Wiley & Sons, 1999.
- [43] R. Courant and D. Hilbert, *Methods of Mathematical Physics: Partial Differential Equations*. John Wiley & Sons, 2008.
- [44] L. Esaki and R. Tsu, “Superlattice and negative differential conductivity in semiconductors,” *IBM Journal of Research and Development*, vol. 14, no. 1, pp. 61–65, 1970.
- [45] E. Kudeki and D. C. Munson, *Analog Signals and Systems*. Upper Saddle River, NJ, USA: Pearson Prentice Hall, 2009.
- [46] A. V. Oppenheim and R. W. Schaffer, *Discrete-time signal processing*. Pearson Education, 2014.

- [47] R. F. Harrington, *Time-harmonic electromagnetic fields*. McGraw-Hill, 1961.
- [48] E. C. Jordan and K. G. Balmain, *Electromagnetic waves and radiating systems*. Prentice-Hall, 1968.
- [49] G. Agarwal, D. Pattanayak, and E. Wolf, "Electromagnetic fields in spatially dispersive media," *Physical Review B*, vol. 10, no. 4, p. 1447, 1974.
- [50] S. L. Chuang, *Physics of photonic devices*. John Wiley & Sons, 2012, vol. 80.
- [51] B. E. Saleh and M. C. Teich, *Fundamentals of photonics*. John Wiley & Sons, 2019.
- [52] M. Born and E. Wolf, *Principles of optics: electromagnetic theory of propagation, interference and diffraction of light*. Elsevier, 2013.
- [53] R. W. Boyd, *Nonlinear optics*. Elsevier, 2003.
- [54] Y.-R. Shen, *The principles of nonlinear optics*. New York, Wiley-Interscience, 1984.
- [55] N. Bloembergen, *Nonlinear optics*. World Scientific, 1996.
- [56] P. C. Krause, O. Wasynczuk, and S. D. Sudhoff, *Analysis of electric machinery*. McGraw-Hill New York, 1986.
- [57] A. E. Fitzgerald, C. Kingsley, S. D. Umans, and B. James, *Electric machinery*. McGraw-Hill New York, 2003, vol. 5.
- [58] M. A. Brown and R. C. Semelka, *MRI.: Basic Principles and Applications*. John Wiley & Sons, 2011.
- [59] C. A. Balanis, *Advanced engineering electromagnetics*. John Wiley & Sons, 1999.
- [60] Wikipedia, "Lorentz force," https://en.wikipedia.org/wiki/Lorentz_force/, accessed: 2019-09-06.
- [61] R. O. Dendy, *Plasma physics: an introductory course*. Cambridge University Press, 1995.
- [62] P. Sen and W. C. Chew, "The frequency dependent dielectric and conductivity response of sedimentary rocks," *Journal of microwave power*, vol. 18, no. 1, pp. 95–105, 1983.
- [63] D. A. Miller, *Quantum Mechanics for Scientists and Engineers*. Cambridge, UK: Cambridge University Press, 2008.
- [64] W. C. Chew, "Quantum mechanics made simple: Lecture notes for ECE 487 at UIUC," <http://wcc Chew.ece.illinois.edu/chew/course/QMAll20161206.pdf>, 2016.
- [65] B. G. Streetman and S. Banerjee, *Solid state electronic devices*. Prentice hall Englewood Cliffs, NJ, 1995.

- [66] Smithsonian, “This 1600-year-old goblet shows that the romans were nanotechnology pioneers,” <https://www.smithsonianmag.com/history/this-1600-year-old-goblet-shows-that-the-romans-were-nanotechnology-pioneers-787224/>, accessed: 2019-09-06.
- [67] K. G. Budden, *Radio waves in the ionosphere*. Cambridge University Press, 2009.
- [68] R. Fitzpatrick, *Plasma physics: an introduction*. CRC Press, 2014.
- [69] G. Strang, *Introduction to linear algebra*. Wellesley-Cambridge Press Wellesley, MA, 1993, vol. 3.
- [70] K. C. Yeh and C.-H. Liu, “Radio wave scintillations in the ionosphere,” *Proceedings of the IEEE*, vol. 70, no. 4, pp. 324–360, 1982.
- [71] J. Kraus, *Electromagnetics*. McGraw-Hill, 1984.
- [72] Wikipedia, “Circular polarization,” https://en.wikipedia.org/wiki/Circular_polarization.
- [73] Q. Zhan, “Cylindrical vector beams: from mathematical concepts to applications,” *Advances in Optics and Photonics*, vol. 1, no. 1, pp. 1–57, 2009.
- [74] H. Haus, *Electromagnetic Noise and Quantum Optical Measurements*, ser. Advanced Texts in Physics. Springer Berlin Heidelberg, 2000.
- [75] W. C. Chew, “Lectures on theory of microwave and optical waveguides, for ECE 531 at UIUC,” <https://engineering.purdue.edu/wcchew/course/tqwAll20160215.pdf>, 2016.
- [76] L. Brillouin, *Wave propagation and group velocity*. Academic Press, 1960.
- [77] R. Plonsey and R. E. Collin, *Principles and applications of electromagnetic fields*. McGraw-Hill, 1961.
- [78] M. N. Sadiku, *Elements of electromagnetics*. Oxford University Press, 2014.
- [79] A. Wadhwa, A. L. Dal, and N. Malhotra, “Transmission media,” <https://www.slideshare.net/abhishekwadhw786/transmission-media-9416228>.
- [80] P. H. Smith, “Transmission line calculator,” *Electronics*, vol. 12, no. 1, pp. 29–31, 1939.
- [81] F. B. Hildebrand, *Advanced calculus for applications*. Prentice-Hall, 1962.
- [82] J. Schutt-Aine, “Experiment02-coaxial transmission line measurement using slotted line,” <http://emlab.uiuc.edu/ece451/ECE451Lab02.pdf>.
- [83] D. M. Pozar, E. J. K. Knapp, and J. B. Mead, “ECE 584 microwave engineering laboratory notebook,” http://www.ecs.umass.edu/ece/ece584/ECE584_lab_manual.pdf, 2004.
- [84] R. E. Collin, *Field theory of guided waves*. McGraw-Hill, 1960.

- [85] Q. S. Liu, S. Sun, and W. C. Chew, “A potential-based integral equation method for low-frequency electromagnetic problems,” *IEEE Transactions on Antennas and Propagation*, vol. 66, no. 3, pp. 1413–1426, 2018.
- [86] M. Born and E. Wolf, *Principles of optics: electromagnetic theory of propagation, interference and diffraction of light*. Pergamon, 1986, first edition 1959.
- [87] Wikipedia, “Snell’s law,” https://en.wikipedia.org/wiki/Snell's_law.
- [88] G. Tyras, *Radiation and propagation of electromagnetic waves*. Academic Press, 1969.
- [89] L. Brekhovskikh, *Waves in layered media*. Academic Press, 1980.
- [90] Scholarpedia, “Goos-hanchen effect,” http://www.scholarpedia.org/article/Goos-Hanchen_effect.
- [91] K. Kao and G. A. Hockham, “Dielectric-fibre surface waveguides for optical frequencies,” in *Proceedings of the Institution of Electrical Engineers*, vol. 113, no. 7. IET, 1966, pp. 1151–1158.
- [92] E. Glytsis, “Slab waveguide fundamentals,” http://users.ntua.gr/eglytsis/IO/Slab_Waveguides_p.pdf, 2018.
- [93] Wikipedia, “Optical fiber,” https://en.wikipedia.org/wiki/Optical_fiber.
- [94] Atlantic Cable, “1869 indo-european cable,” <https://atlantic-cable.com/Cables/1869IndoEur/index.htm>.
- [95] Wikipedia, “Submarine communications cable,” https://en.wikipedia.org/wiki/Submarine_communications_cable.
- [96] D. Brewster, “On the laws which regulate the polarisation of light by reflexion from transparent bodies,” *Philosophical Transactions of the Royal Society of London*, vol. 105, pp. 125–159, 1815.
- [97] Wikipedia, “Brewster’s angle,” https://en.wikipedia.org/wiki/Brewster's_angle.
- [98] H. Raether, “Surface plasmons on smooth surfaces,” in *Surface plasmons on smooth and rough surfaces and on gratings*. Springer, 1988, pp. 4–39.
- [99] E. Kretschmann and H. Raether, “Radiative decay of non radiative surface plasmons excited by light,” *Zeitschrift für Naturforschung A*, vol. 23, no. 12, pp. 2135–2136, 1968.
- [100] Wikipedia, “Surface plasmon,” https://en.wikipedia.org/wiki/Surface_plasmon.
- [101] Wikimedia, “Gaussian wave packet,” https://commons.wikimedia.org/wiki/File:Gaussian_wave_packet.svg.
- [102] Wikipedia, “Charles K. Kao,” https://en.wikipedia.org/wiki/Charles_K._Kao.
- [103] H. B. Callen and T. A. Welton, “Irreversibility and generalized noise,” *Physical Review*, vol. 83, no. 1, p. 34, 1951.

- [104] R. Kubo, "The fluctuation-dissipation theorem," *Reports on progress in physics*, vol. 29, no. 1, p. 255, 1966.
- [105] C. Lee, S. Lee, and S. Chuang, "Plot of modal field distribution in rectangular and circular waveguides," *IEEE transactions on microwave theory and techniques*, vol. 33, no. 3, pp. 271–274, 1985.
- [106] W. C. Chew, *Waves and Fields in Inhomogeneous Media*. IEEE Press, 1996.
- [107] M. Abramowitz and I. A. Stegun, *Handbook of mathematical functions: with formulas, graphs, and mathematical tables*. Courier Corporation, 1965, vol. 55.
- [108] —, "Handbook of mathematical functions: with formulas, graphs, and mathematical tables," <http://people.math.sfu.ca/~cbm/aands/index.htm>.
- [109] W. C. Chew, W. Sha, and Q. I. Dai, "Green's dyadic, spectral function, local density of states, and fluctuation dissipation theorem," *arXiv preprint arXiv:1505.01586*, 2015.
- [110] Wikipedia, "Very Large Array," https://en.wikipedia.org/wiki/Very_Large_Array.
- [111] C. A. Balanis and E. Holzman, "Circular waveguides," *Encyclopedia of RF and Microwave Engineering*, 2005.
- [112] M. Al-Hakkak and Y. Lo, "Circular waveguides with anisotropic walls," *Electronics Letters*, vol. 6, no. 24, pp. 786–789, 1970.
- [113] Wikipedia, "Horn Antenna," https://en.wikipedia.org/wiki/Horn_antenna.
- [114] P. Silvester and P. Benedek, "Microstrip discontinuity capacitances for right-angle bends, t junctions, and crossings," *IEEE Transactions on Microwave Theory and Techniques*, vol. 21, no. 5, pp. 341–346, 1973.
- [115] R. Garg and I. Bahl, "Microstrip discontinuities," *International Journal of Electronics Theoretical and Experimental*, vol. 45, no. 1, pp. 81–87, 1978.
- [116] P. Smith and E. Turner, "A bistable fabry-perot resonator," *Applied Physics Letters*, vol. 30, no. 6, pp. 280–281, 1977.
- [117] A. Yariv, *Optical electronics*. Saunders College Publ., 1991.
- [118] Wikipedia, "Klystron," <https://en.wikipedia.org/wiki/Klystron>.
- [119] —, "Magnetron," https://en.wikipedia.org/wiki/Cavity_magnetron.
- [120] —, "Absorption Wavemeter," https://en.wikipedia.org/wiki/Absorption_wavemeter.
- [121] W. C. Chew, M. S. Tong, and B. Hu, "Integral equation methods for electromagnetic and elastic waves," *Synthesis Lectures on Computational Electromagnetics*, vol. 3, no. 1, pp. 1–241, 2008.
- [122] A. D. Yaghjian, "Reflections on maxwell's treatise," *Progress In Electromagnetics Research*, vol. 149, pp. 217–249, 2014.

- [123] L. Nagel and D. Pederson, "Simulation program with integrated circuit emphasis," in *Midwest Symposium on Circuit Theory*, 1973.
- [124] S. A. Schelkunoff and H. T. Friis, *Antennas: theory and practice*. Wiley New York, 1952, vol. 639.
- [125] H. G. Schantz, "A brief history of uwb antennas," *IEEE Aerospace and Electronic Systems Magazine*, vol. 19, no. 4, pp. 22–26, 2004.