

ECE 301-001 and 301-003, Midterm #1
8–9:30pm, Wednesday, February 8, 2023, CL50 Rm224.

1. Do not write answers on the back of pages!
2. After the exam ended, you will have 5 additional minutes to write down your name and Purdue ID on each of the pages.
3. If you need additional sheets to write down your answers, please let the instructor/TA know. We will hand out additional answer sheets then.
4. Enter your student ID number, and signature in the space provided on this page.
5. This is a closed book exam.
6. This exam contains multiple-choice questions and work-out questions. For multiple choice questions, there is no need to justify your answers. You have **90 minutes** to complete it. The students are suggested not spending too much time on a single question, and first working on those that you know how to solve.
7. The instructor/TA will hand out loose sheets of paper for the rough work.
8. Neither calculators nor help sheets are allowed.

Name:

Student ID:

As a Boiler Maker pursuing academic excellence, I pledge to be honest and true in all that I do. Accountable together — We are Purdue.

Signature:

Date:

Last Name:

First Name:

Purdue ID:

Question 1: [14%, Energy and power]

Consider the following signal:

$$x[n] = \begin{cases} e^{-(n-3)}(\cos(0.25\pi n) + j \sin(0.25\pi n)) & \text{if } n \geq 3 \\ e^{n-3}(\cos(0.25\pi n) + j \sin(0.25\pi n)) & \text{if } n \leq 2 \end{cases}$$

- (a) What is the total energy of $x[n]$?
- (b) What is the overall average power of $x[n]$?

Hint: If $|r| < 1$, then we have the following formulas for computing the infinite sum of a geometric sequence:

$$\sum_{k=1}^{\infty} ar^{k-1} = \frac{a}{1-r}$$
$$\sum_{k=1}^{\infty} kar^{k-1} = \frac{a}{(1-r)^2}.$$

If $r \neq 1$, then we have the following formula for computing the finite sum of a geometric sequence:

$$\sum_{k=1}^K ar^{k-1} = \frac{a(1-r^K)}{1-r}.$$

Last Name:

First Name:

Purdue ID:

This sheet is for Question 1.

Last Name:

First Name:

Purdue ID:

This sheet is for Question 1.

Last Name:

First Name:

Purdue ID:

Question 2: [15%, Linearity]

Determine whether the following systems are linear or not. Be sure to justify your reasoning in each case.

(a) The system with input $x(t)$ and output

$$y(t) = \int_{\tau=0}^{10} x(t - \tau)u(\tau)d\tau,$$

where $u(t)$ is the unit step signal.

(b) The system with input $x[n]$ and output

$$y[n] = e^{x[n]}.$$

Last Name:

First Name:

Purdue ID:

This sheet is for Question 2.

Last Name:

First Name:

Purdue ID:

This sheet is for Question 2.

Last Name:

First Name:

Purdue ID:

Question 3: [14%, Algebra of signals]

Consider two signals

$$x(t) = e^{j\omega t}$$

$$h(t) = u(t + 1) - u(t - 2)$$

- (a) Find mathematical expressions for the signals $\frac{dx(t)}{dt}$ and $\frac{dh(t)}{dt}$.
- (b) Determine $y(t)$ for a system that takes $x(t)$ as input and has the input-output relationship

$$y(t) = \int_{\tau=-\infty}^{\infty} x(\tau)h(t - \tau)d\tau.$$

Last Name:

First Name:

Purdue ID:

This sheet is for Question 3.

Last Name:

First Name:

Purdue ID:

This sheet is for Question 3.

Last Name:

First Name:

Purdue ID:

Question 4: [15%, HRCEs]

Recall that a family of discrete-time harmonically-related complex exponentials (DT HRCEs) is given by:

$$x_k[n] = e^{j\frac{2\pi k}{N}n}, \quad k = 0, \dots, N - 1$$

and a family of continuous-time HRCEs (CT HRCEs) is given by:

$$x_k(t) = e^{j\frac{2\pi k}{T}t}, \quad k = 0, \pm 1, \pm 2, \dots$$

- (a) Consider a fundamental frequency $\omega_0 = \frac{\pi}{8}$.
- Write the expression for the DT HRCE signal family. What is the value of N ?
 - Which signal index k in the DT HRCE family has the highest rate of oscillation? Write the formula for this signal $x_k[n]$ in its most simplified form.
 - Does the index k identified in (a)-ii also have the highest rate of oscillation for the corresponding CT HRCE family? Explain your answer.
- (b) Next, consider a fundamental frequency $\omega_0 = \frac{1}{4}$.
- Does the CT HRCE family exist? If so, write its expression and determine the value of T . Explain your answer.
 - Does the DT HRCE family exist? If so, write its expression and determine the value of N . Explain your answer.

Last Name:

First Name:

Purdue ID:

This sheet is for Question 4.

Last Name:

First Name:

Purdue ID:

This sheet is for Question 4.

Last Name:

First Name:

Purdue ID:

Question 5: [15%, Time transformations]

Consider the two signals, $x_1(t)$ and $x_2[n]$, as pictured below.

(a) Sketch a plot of $x_1(-\frac{1}{2}(t - 1))$.

(b) Sketch a plot of $x_2[-2 + 2n]$.

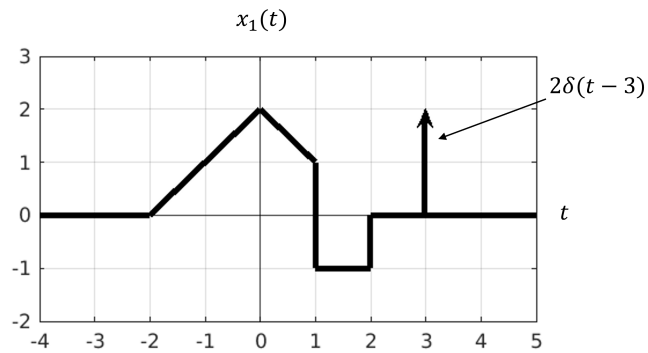


Figure 1: Plot of $x_1(t)$.

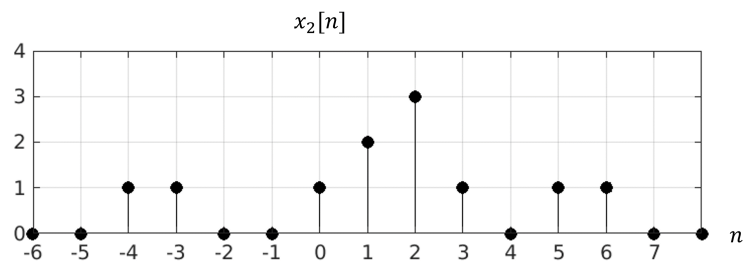


Figure 2: Plot of $x_2[n]$.

Last Name:

First Name:

Purdue ID:

This sheet is for Question 5.

Last Name:

First Name:

Purdue ID:

This sheet is for Question 5.

Last Name:

First Name:

Purdue ID:

Question 6: [14%, Periodicity]

(a) Is the signal

$$x(t) = \sum_{k=-\infty}^{\infty} (\delta(t - 4k) + \delta(t - 4k - 1)) + e^{j\frac{3\pi}{2}t} + \sin\left(\frac{\pi}{3}t + \frac{\pi}{6}\right)$$

periodic? If so, determine its fundamental period.

(b) Repeat (a) for the signal

$$x[n] = \cos\left(\frac{n - \pi}{5}\right) + e^{j6\pi n}.$$

Last Name:

First Name:

Purdue ID:

This sheet is for Question 6.

Last Name:

First Name:

Purdue ID:

This sheet is for Question 6.


Last Name:

First Name:

Purdue ID:

Question 7: [13%, Even-odd decomposition]

Consider the signal $x[n]$ depicted below.

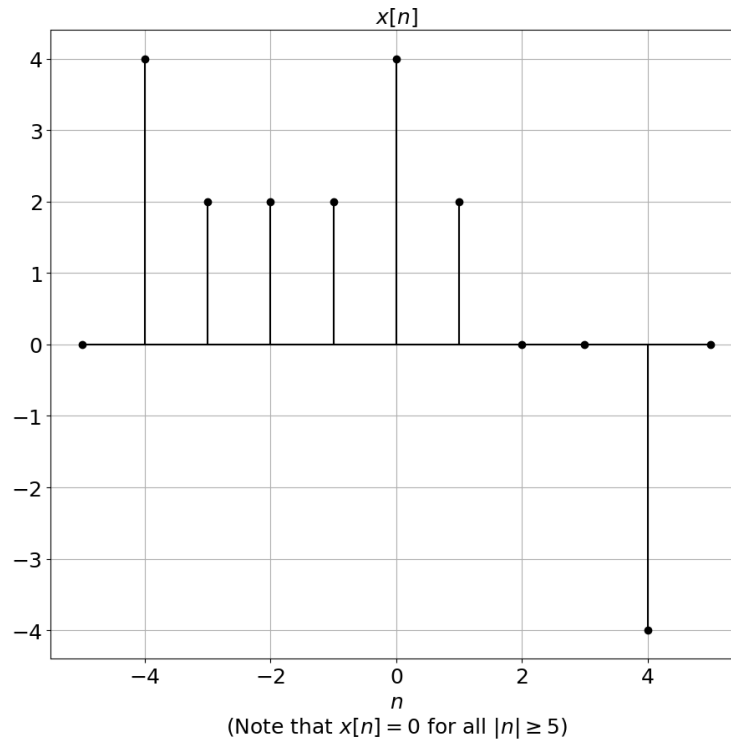

- (a) Is $x[n]$ even, odd, or neither?
- (b) Decompose $x[n] = x_{\text{even}}[n] + x_{\text{odd}}[n]$ into its even and odd signal components. Give plots of $x_{\text{even}}[n]$ and $x_{\text{odd}}[n]$.

Last Name:

First Name:

Purdue ID:

This sheet is for Question 7.

Last Name:

First Name:

Purdue ID:

This sheet is for Question 7.
