

[CoorsTek manufactures advanced technical ceramic and high-performance plastic components.](#)



## Microscale Boiling May Lead to Better Cooling for Electronics and Hybrid Vehicles

[Back One](#)

Posted in | [Electronics](#) | [Materials Research](#)



**Understanding precisely how fluid boils in tiny "microchannels" has led to formulas and models that will help engineers design systems to cool high-power electronics in electric and hybrid cars, aircraft, computers and other devices.**


[Ads by Google](#)



## [On-site Computer Repair](#)


Affordable Same Day Service Servicing Montgomery County, MD

[www.1877geeksonsite.com](http://www.1877geeksonsite.com)

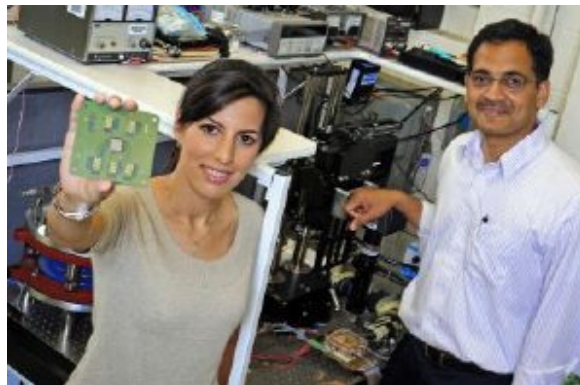

Researchers have determined precisely how fluid boils in tiny "microchannels," creating formulas and models that will help engineers design systems to cool high-power electronics in electric and hybrid cars, aircraft, computers, and other applications. Here, Purdue University doctoral student Tannaz Harirchian holds up special chips provided by Delphi Electronics and Safety that she and Professor Suresh Garimella used to simulate what happens in a real chip. Credit: Purdue News Service photo/Andrew Hancock.

Allowing a liquid to boil in cooling systems dramatically increases how much heat can be removed, compared to simply heating a liquid to below its boiling point, said Suresh Garimella, the R. Eugene and





Susie E. Goodson Professor of Mechanical Engineering at [Purdue University](#).



However, boiling occurs differently in tiny channels than it does in ordinary size tubing used in conventional cooling systems.

"One big question has always been, where is the transition from macroscale boiling to microscale boiling?" said doctoral student Tannaz Harirchian. "How do you define a microchannel versus a macrochannel, and at what point do we need to apply different models to design systems? Now we have an answer."

Findings will be detailed in a research paper by Garimella and Harirchian and a keynote address to be presented by Garimella on Oct. 8 during the conference Thermal Investigations of ICs and Systems, or Therminic, from Oct. 7-9 in Leuven, Belgium. The researchers also have published several related papers in peer-reviewed journals.

Indiana's 21st Century Research and Technology Fund has provided \$1.9 million to Purdue and Delphi Corp. in Kokomo, Ind., to help commercialize the advanced cooling system using microchannels for electronic components in hybrid and electric cars. The research also is funded by the Purdue-based National Science Foundation Cooling Technologies Research Center, a consortium of corporations, university and government laboratories working to overcome heat-transfer obstacles in developing new compact cooling technologies.

The new type of cooling system will be used to prevent overheating of devices called insulated gate bipolar transistors, high-power switching transistors used in hybrid and electric vehicles. The chips are required to drive electric motors, switching large amounts of power from the battery pack to electrical coils needed to accelerate a vehicle from zero to 60 mph in 10 seconds or less. The devices also are needed for "regenerative braking," in which the electric motors serve as generators to brake the vehicle, generating power to recharge the battery pack; to convert electrical current to run accessories in the vehicle; and to convert alternating current to direct current to charge the battery from a plug-in line.

The high-power devices produce about four times as much heat as a conventional computer chip.

The researchers studied a "dielectric liquid," a fluid that doesn't conduct electricity, which allows it to be used directly in circuits without causing electrical shorts.

"We have finally made sense of boiling in small-scale channels and now have a nice understanding of the physics," said Garimella, director of the NSF Cooling Technologies Research Center.

Researchers used special test chips fabricated by Delphi that are about a half-inch on each side and contain 25 temperature sensors.

"Right under each of these sensors is a little heater, so we can adjust the amount of heat we apply to specific locations on the chip and simulate what happens in a real chip," he said.

Too much heat hinders the performance of electronic chips or damages the tiny circuitry, especially in small "hot spots."

"In order to design these systems properly you need to be able to predict the heat-transfer rate and how much cooling you will get," he said.

Conventional chip-cooling methods use a small fan and finned metal plates called heat sinks, which are attached to computer chips to dissipate heat. Such air-cooled methods, however, do not remove enough heat for the advanced automotive electronics, especially because of hot air under a car's hood, Garimella said.

The microchannels are etched directly on top of the silicon chips. Because both the channels and the chip are made of silicon, there is no dramatic difference in expansion from heating, which allows chips to be stacked on top of each other with the cooling channels between each chip.

This stacking makes it possible to create more compact systems, since the chips do not have to be laid out horizontally on a circuit board as they ordinarily would.

"We can fit a lot more chips in much less real estate using this approach," Garimella said.

Unlike boiling liquid in larger cooling systems, spherical bubbles sometimes don't form in the smallest channels. Rather, one long continuous "liquid annulus," or oblong "slugs" of vapor in liquid form.

Harirchian developed formulas that allow engineers to tell when different kinds of flows occur and how to design the systems accordingly. The specific "flow regimes" -- whether the fluid is bubbly, annular or in slugs -- must be known before the proper formulas can be used to predict the performance of certain channel designs.

She also determined that it's not the width or the depth of the channels that most influence the boiling behavior but the cross sectional area of each channel, said Garimella, who began the microchannel research about 10 years ago.

"I am very proud of this work," Garimella said. "We have come a long way."

Researchers used a high-speed camera to capture the behavior of the circulating fluid, studying channels as small as 100 by 100 microns and as large as 100 microns deep by about 6 millimeters wide.

"We wanted to test a wide range of channel sizes," Harirchian said.

Delphi has taken the work further, creating prototypes and commercializing the cooling technology, said Delphi's Bruce Myers, principal technical fellow.

The researchers have created a database of movies accessible on the NSF center's Web site to demonstrate the boiling behavior in microchannels. They also have created a "complete test matrix" that enables engineers to determine how a particular system would perform given a range of channel dimensions, amount of heating and fluid flow.

"You can basically mix and match different design specifics and see the result," Garimella said.

The cooling systems also are being developed to cool the electronic

controls in aircraft, military systems and for other applications.

"We hope to be able to use the new models to help us in designing vapor cycle system evaporators for aircraft thermal management," said Hal Strumpf, senior technology fellow and chief engineer for thermal systems at Honeywell International Inc. "These evaporators typically operate over the full range of flow regimes studied by Garimella's team, and each individual flow regime must be accurately modeled to predict evaporator performance."

[Ads by Google](#)

## [Cooling Solutions](#)

Cool Data Centers & Server Rooms Plugs into standard outlet.  
[tripplite.com/CoolingSolution](http://tripplite.com/CoolingSolution)

Future research is concentrating on creating additional heat-transfer models for designing the cooling systems.

Posted Sep 23, 2009

- [Popular](#)
- [Latest](#)
- [Random](#)

- :: [New Crystallization Method to Create Poly-Silicon for Low Cost Solar Power](#)
- :: [VISTAGY, Siemens Extend Partnership to Meet Growing Composite Material Needs](#)
- :: [Bing Energy, FSU to Develop 500 W Polymer Electrolyte Membrane Fuel Cell System](#)
- :: [More than 52,000 Springer eBooks Available via Google eBookstore](#)
- :: [Comar Chemicals to Establish Second Production Site at Clariant's Infrapark Baselland](#)
- :: [Green Chemistry Research Results in Top UK Honour](#)
- :: [UV-Transparent Coating Opens Up New Possibilities for Image Sensors](#)
- :: [Mercury Scientific Add A New Static Powder Flow Tester to Their Product Line](#)
- :: [New Trace Gas Analyzer from Extrel Detects Down to 1amu](#)
- :: [Firehole Launches New Composite Analysis Software](#)
- :: [Saint-Gobain Chosen as Research Partner of CERC BEE](#)
- :: [Targray Technology Expands its Solar Materials Product Portfolio](#)
- :: [OPXBIO Reaches Commercial Bioprocess Performance and Cost Goals for BioAcrylic Production](#)
- :: [NLMK Launch New Steel Rolling Facility](#)
- :: [Biobent Polymers Launches New Panacea Family of Bioplastics](#)

[Tab options](#)

Read in | [English](#) | [Español](#) | [Français](#) | [Deutsch](#) | [Português](#) | [Italiano](#)  
| [日本語](#) | [한국어](#) | [简体中文](#) | [繁體中文](#) | [العربية](#) | [Dansk](#) | [Nederlands](#) |  
[Filipino](#) | [Finnish](#) | [Ελληνικά](#) | [עברית](#) | [हिन्दी](#) | [Bahasa](#) | [Norsk](#) | [Русский](#)  
| [Svenska](#)

Search AZoM News

[AZoM News Archive Page](#)

[Δ Top](#)

[Back One](#)

9770425302



**Bodycote**

Low Pressure Carburising  
*Enhancing Material  
Properties*



[Bodycote offers all standard heat treatment services plus advanced specialist processes.](#)

**Other AZoNetwork Sites** | [AZoNano.com](#) | [AZoBuild.com](#) | [AZoOptics.com](#) | [AZoCleantech.com](#) | [AZoSensors.com](#) |  
[AZoMining.com](#) | [AZoRobotics.com](#) | [News-Medical.Net](#) | **Partners** - [Eng-Tips.com](#)

AZoM™ - The A to Z of Materials and AZojomo - The "AZo Journal of Materials Online"...AZoM™.com Pty.Ltd  
Copyright © 2000-2011