



Solutions for a nanoscale world.™

Over the largest standard scanning range.

[The Dektak 150 Surface Profiler boasts the industry's best performance](#)

Purdue Engineers Develop Tiny "Micro-Pump" Cooling Device

[Email / Share](#)

[Back One](#)

Posted in | [MEMS - NEMS](#) | [Nanoelectronics](#)



Engineers at [Purdue University](#) have developed a tiny "micro-pump" cooling device small enough to fit on a computer chip that circulates coolant through channels etched into the chip.



Innovative cooling systems will be needed for future computer chips that will generate more heat than current technology, and this extra heating could damage electronic devices or hinder performance, said Suresh Garimella, a professor of mechanical engineering.



The new device has been integrated onto a silicon chip that is about 1 centimeter square, or roughly one-sixth of a square inch. The technology is an example of a microelectromechanical system, or MEMS, a tiny mechanical device fabricated using methods generally associated with microelectronics.



"Because it's a MEMS pump, we were able to integrate the entire cooling system right onto a chip," Garimella said. "The most innovative part of the technology is the micro-pump."



An article about the cooling device will appear in the May issue of Electronics Cooling magazine. The article was written by doctoral student Brian D. Iverson, Garimella and former doctoral student Vishal Singhal, who recently graduated and co-founded Thorrn Micro Technologies Inc., in Redwood City, Calif.



Chips in today's computers are cooled primarily with an assembly containing conventional fans and "heat sinks," or metal plates containing fins to dissipate heat. But because chips a decade from now will likely contain upwards of 100 times more transistors and other devices, they will generate far more heat than chips currently in use, Garimella said.



"Our goal is to develop advanced cooling systems that are



self-contained on chips and are capable of handling the more extreme heating in future chips," said Garimella, director of Purdue's Cooling Technologies Research Center. The center, supported by the National Science Foundation, industry and Purdue, was formed to help corporations develop miniature cooling technologies for a wide range of applications, from electronics and computers to telecommunications and advanced aircraft.

The prototype chip contains numerous water-filled micro-channels, grooves about 100 microns wide, or about the width of a human hair. The channels are covered with a series of hundreds of electrodes, electronic devices that receive varying voltage pulses in such a way that a traveling electric field is created in each channel. The traveling field creates ions, or electrically charged atoms and molecules, which are dragged along by the moving field.

"Say every sixth electrode receives the same voltage, these varying voltages from one electrode to the next produce a traveling electrical field that pulls the ions forward, causing the water to flow and inducing a cooling action," Garimella said. "Essentially, you are pumping fluid forward."

This pumping action is created by a phenomenon called electrohydrodynamics, which uses the interactions of ions and electric fields to cause fluid to flow.

"Engineers have been using electrohydrodynamics to move fluids with electric fields for a long time, but it's unusual to be able to do this on the micro-scale as we have demonstrated," Garimella said.

The researchers also have added a feature to boost the force of the pumping action. A thin sheet of piezoelectric material, which expands and contracts in response to an electric current, was glued on top of the cover of the liquid-filled channels.

"This material acts as a diaphragm that deforms up and down when you give it a voltage, causing it to push additional flow through the channels," Garimella said. "We have developed mathematical models that show this piezo action enhances the electrohydrodynamic performance."

The diaphragm has enhanced the pumping action by 13 percent in the current prototype, but the modeling indicates a possible enhancement of 100 percent or greater, he said.

"Although electrohydrodynamics has generally not been considered practical for pumping applications due to the assumption that it requires a large amount of energy and does not produce enough motive force for thrust, the method has been shown to be far more efficient for micro-cooling applications," Garimella said. "We have shown that the power input required is in the microwatts, but you can get milliwatts of cooling. In other words, the cooling effect is more than a thousand times greater than the energy needed to drive the system. That's because all we need to do is create enough of a flow to induce cooling."

However, several major challenges remain.

"One big challenge is further developing mathematical models that are comprehensive and accurate because this is a very

complicated, dynamic system," Garimella said. "You've got fluid flow on a micro-scale, you've got electrohydrodynamic effects, electrical fields and a moving diaphragm."

Other challenges include sealing the tiny channels to prevent water leakage and designing the system so that it could be manufactured under the same conditions as semiconductor chips.

<http://www.purdue.edu>

[Ads by Google](#)

[On-site Computer Repair](#)

Affordable Same Day Service Servicing Montgomery County, MD
www.1877geeksonsite.com

Posted 2nd May 2006

- [Popular](#)
- [Latest](#)
- [Random](#)

- [Controlling Nanoparticle Clusters to Assess Impact on Environmental Health and Safety](#)
- [Nanopreme--New Carbon Nanotube-Enhanced Epoxy Resin for Racquets and Golf Clubs](#)
- [Nano-Based Dog Gone Smart Pet Products to be Featured at Global PETS Forum](#)
- [Scientists Develop New Food Packaging Material Coated with Silver Nanoparticles](#)
- [New BEAST Method Reveals Secrets of Mysterious Nano-Sized Electromagnetic Hotspots](#)
- [Nanometrics Supplies Next Generation 3D Metrology System for 3D Wafer Inspection](#)
- [New Way to Fabricate Metal Nanoparticles in Catalysts](#)
- [New Method to Create Electrodes for Use in Microfluidic Devices](#)
- [Shimadzu Collaborates with Phenomenex for LC and GC Systems](#)
- [DCG Systems Secures IARPA Funding to Develop Logic Analysis and Fault Isolation Tools](#)
- [Rice Researchers Find Ways to Control Chiral Structure in Nanotubes](#)
- [Cinterion Introduces PH8 M2M Module for Wireless Connectivity](#)
- [CTI and UAlbany NanoCollege Extend Joint Workforce Development Program](#)
- [TTP LabTech to Promote Nanoliter Liquid Handling System at Laboratory Automation 2011](#)

- [Risø DTU and Topsoe Fuel Cell Announce Long-Term Strategic Partnership](#)

[Tab options](#)


Read in | [English](#) | [Español](#) | [Français](#) | [Deutsch](#) | [Português](#) | [Italiano](#) | [日本語](#) | [한국어](#) | [简体中文](#) | [繁體中文](#) | [العربية](#) | [Dansk](#) | [Nederlands](#) | [Filipino](#) | [Finnish](#) | [Ελληνικά](#) | [עברית](#) | [हिन्दी](#) | [Bahasa](#) | [Norsk](#) | [Русский](#) | [Svenska](#)

[Nanotechnology News Archive](#)

Δ Top

Back One

2474798249

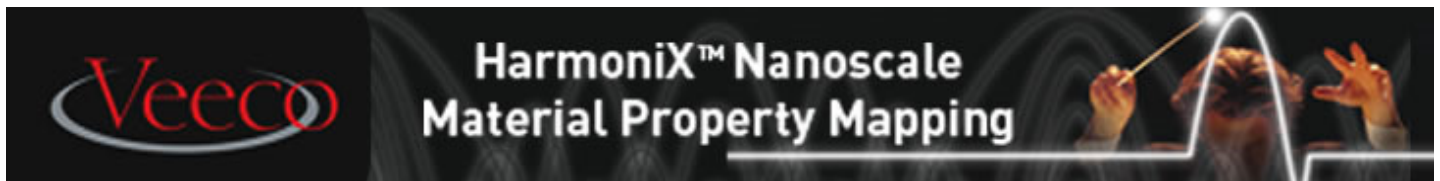

[Veeco Presents the Next Revolution in AFM - HarmoniX™!](#)

AZoNano is grateful for the support provided by our sponsors to both AZoNano.com and to the authors and peer reviewers of [AZoJono -Journal of Nantechonlogy Online](#) - open access to leading Nanotech Science.

Other AZoNetwork Sites | [AZoM.com](#) | [AZoBuild.com](#) | [AZoOptics.com](#) | [AZoCleantech.com](#) | [AZoSensors.com](#) | [AZoMining.com](#)
| [AZoRobotics.com](#) | [News-Medical.Net](#)

Use of this website is governed by these [Terms and Conditions](#).

Version 2.0 AZoNano - The A to Z of Nanotechnology...Copyright © 2011 by AZoM.com Pty.Ltd