

Lecture 31

Equivalence Theorem and Huygens' Principle

31.1 Equivalence Theorem or Equivalence Principle

Another theorem that is closely related to uniqueness theorem is the equivalence theorem or equivalence principle. This theorem is discussed in many textbooks [31, 47, 48, 59, 155]. Some authors also call it Love's equivalence principle [156].

We can consider three cases: (1) The inside-out case. (2) The outside-in case. (3) The general case.

31.1.1 Inside-Out Case

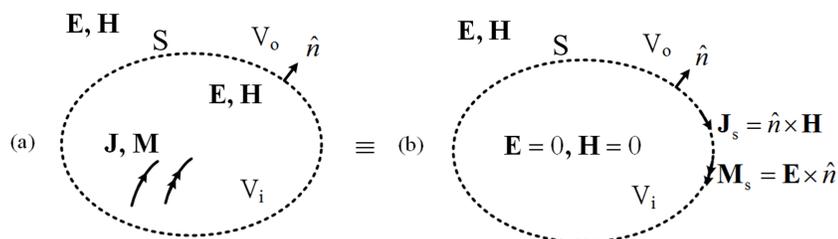


Figure 31.1: The inside-out problem where equivalent currents are impressed on the surface S to produce the same fields outside in V_o in both cases.

In this case, we let \mathbf{J} and \mathbf{M} be the time-harmonic radiating sources inside a surface S radiating into a region $V = V_o \cup V_i$. They produce \mathbf{E} and \mathbf{H} everywhere. We can construct

an equivalence problem by first constructing an imaginary surface S . In this equivalence problem, the fields outside S in V_o are the same in both (a) and (b). But in (b), the fields inside S in V_i are zero.

Apparently, the tangential components of the fields are discontinuous at S . We ask ourselves what surface currents are needed on surface S so that the boundary conditions for field discontinuities are satisfied on S . Therefore, surface currents needed for these field discontinuities are to be impressed on S . They are

$$\mathbf{J}_s = \hat{n} \times \mathbf{H}, \quad \mathbf{M}_s = \mathbf{E} \times \hat{n} \quad (31.1.1)$$

We can convince ourselves that $\hat{n} \times \mathbf{H}$ and $\mathbf{E} \times \hat{n}$ just outside S in both cases are the same. Furthermore, we are persuaded that the above is a bona fide solution to Maxwell's equations.

- The boundary conditions on the surface S satisfy the boundary conditions required of Maxwell's equations.
- By the uniqueness theorem, only the equality of one of them $\mathbf{E} \times \hat{n}$, or $\hat{n} \times \mathbf{H}$ on S , will guarantee that \mathbf{E} and \mathbf{H} outside S are the same in both cases (a) and (b).

The fact that these equivalent currents generate zero fields inside S is known as the extinction theorem. This equivalence theorem can also be proved mathematically, as shall be shown.

31.1.2 Outside-in Case

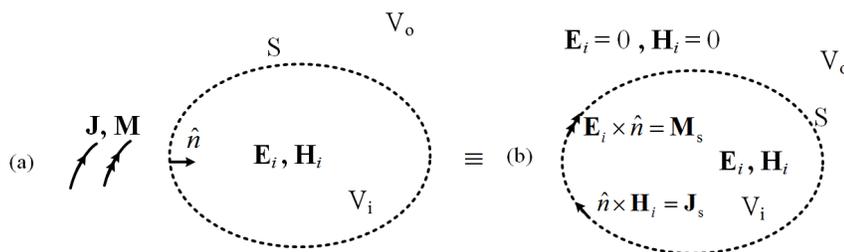


Figure 31.2: The outside-in problem where equivalent currents are impressed on the surface S to produce the same fields inside in both cases.

Similar to before, we find an equivalent problem (b) where the fields inside S in V_i is the same as in (a), but the fields outside S in V_o in the equivalent problem is zero. The fields are discontinuous across the surface S , and hence, impressed surface currents are needed to account for these discontinuities.

Then by the uniqueness theorem, the fields $\mathbf{E}_i, \mathbf{H}_i$ inside V in both cases are the same. Again, by the extinction theorem, the fields produced by $\mathbf{E}_i \times \hat{n}$ and $\hat{n} \times \mathbf{H}_i$ are zero outside S .

31.1.3 General Case

From these two cases, we can create a rich variety of equivalence problems. By linear superposition of the inside-out problem, and the outside-in problem, then a third equivalence problem is shown in Figure 31.3:

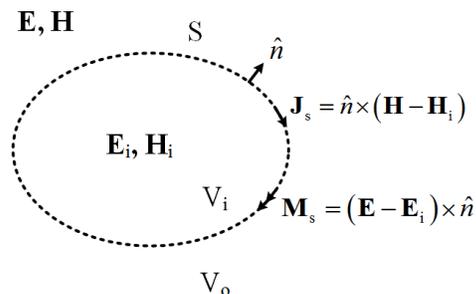


Figure 31.3: The general case where the fields are non-zero both inside and outside the surface S . Equivalence currents are needed on the surface S to support the discontinuities in the fields.

31.1.4 Electric Current on a PEC

First, from reciprocity theorem, it is quite easy to prove that an impressed current on the PEC cannot radiate. We can start with the inside-out equivalence problem. Then using a Gedanken experiment, since the fields inside S is zero for the inside-out problem, one can insert an PEC object inside S without disturbing the fields \mathbf{E} and \mathbf{H} outside. As the PEC object grows to snugly fit the surface S , then the electric current $\mathbf{J}_s = \hat{n} \times \mathbf{H}$ does not radiate by reciprocity. Only one of the two currents is radiating, namely, the magnetic current $\mathbf{M}_s = \mathbf{E} \times \hat{n}$ is radiating, and \mathbf{J}_s in Figure 31.4 can be removed. This is commensurate with the uniqueness theorem that only the knowledge of $\mathbf{E} \times \hat{n}$ is needed to uniquely determine the fields outside S .

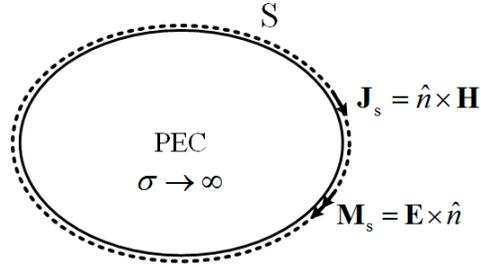


Figure 31.4: On a PEC surface, only one of the two currents is needed since an electric current does not radiate on a PEC surface.

31.1.5 Magnetic Current on a PMC

Again, from reciprocity, an impressed magnetic current on a PMC cannot radiate. By the same token, we can perform the Gedanken experiment as before by inserting a PMC object inside S . It will not alter the fields outside S , as the fields inside S is zero. As the PMC object grows to snugly fit the surface S , only the electric current $\mathbf{J}_s = \hat{n} \times \mathbf{H}$ radiates, and the magnetic current $\mathbf{M}_s = \mathbf{E} \times \hat{n}$ does not radiate and it can be removed. This is again commensurate with the uniqueness theorem that only the knowledge of the $\hat{n} \times \mathbf{H}$ is needed to uniquely determine the fields outside S .

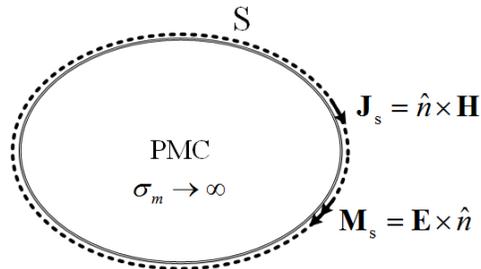


Figure 31.5: Similarly, on a PMC, only an electric current is needed to produce the field outside the surface S .

31.2 Huygens' Principle and Green's Theorem

Huygens' principle shows how a wave field on a surface S determines the wave field outside the surface S . This concept was expressed by Huygens in the 1600s [157]. But the mathematical expression of this idea was due to George Green¹ in the 1800s. This concept can be expressed

¹George Green (1793-1841) was self educated and the son of a miller in Nottingham, England [158].

mathematically for both scalar and vector waves. The derivation for the vector wave case is homomorphic to the scalar wave case. But the algebra in the scalar wave case is much simpler. Therefore, we shall first discuss the scalar wave case first, followed by the electromagnetic vector wave case.

31.2.1 Scalar Waves Case

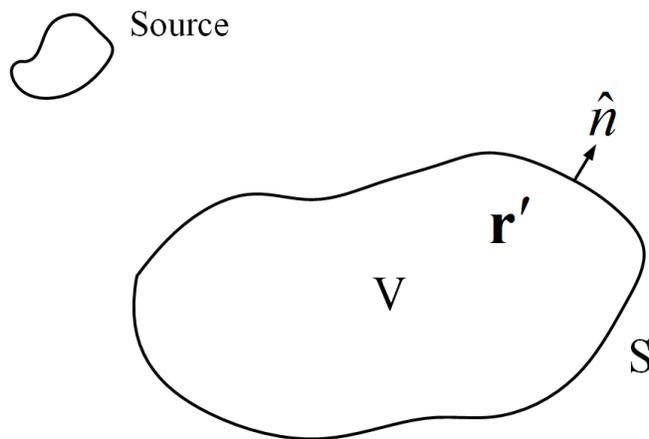


Figure 31.6: The geometry for deriving Huygens' principle for scalar wave equation.

For a $\psi(\mathbf{r})$ that satisfies the scalar wave equation

$$(\nabla^2 + k^2)\psi(\mathbf{r}) = 0, \quad (31.2.1)$$

the corresponding scalar Green's function $g(\mathbf{r}, \mathbf{r}')$ satisfies

$$(\nabla^2 + k^2)g(\mathbf{r}, \mathbf{r}') = -\delta(\mathbf{r} - \mathbf{r}'). \quad (31.2.2)$$

Next, we multiply (31.2.1) by $g(\mathbf{r}, \mathbf{r}')$ and (31.2.2) by $\psi(\mathbf{r})$. And then, we subtract the resultant equations and integrating over a volume V as shown in Figure 31.6. There are two cases to consider: when \mathbf{r}' is in V , or when \mathbf{r}' is outside V . Thus, we have

$$\left. \begin{array}{l} \text{if } \mathbf{r}' \in V, \\ \text{if } \mathbf{r}' \notin V, \end{array} \right\} \psi(\mathbf{r}') \left. \begin{array}{l} \\ 0 \end{array} \right\} = \int_V d\mathbf{r} [g(\mathbf{r}, \mathbf{r}')\nabla^2\psi(\mathbf{r}) - \psi(\mathbf{r})\nabla^2g(\mathbf{r}, \mathbf{r}')], \quad (31.2.3)$$

The left-hand side evaluates to different values depending on where \mathbf{r}' is due to the sifting property of the delta function $\delta(\mathbf{r} - \mathbf{r}')$. Since $g\nabla^2\psi - \psi\nabla^2g = \nabla \cdot (g\nabla\psi - \psi\nabla g)$, the left-hand

side of (31.2.3) can be rewritten using Gauss' divergence theorem, giving²

$$\left. \begin{array}{l} \text{if } \mathbf{r}' \in V, \\ \text{if } \mathbf{r}' \notin V, \end{array} \right\} \psi(\mathbf{r}') \left. \begin{array}{l} \\ 0 \end{array} \right\} = \oint_S dS \hat{n} \cdot [g(\mathbf{r}, \mathbf{r}') \nabla \psi(\mathbf{r}) - \psi(\mathbf{r}) \nabla g(\mathbf{r}, \mathbf{r}')], \quad (31.2.4)$$

where S is the surface bounding V . The above is the mathematical expression that once $\psi(\mathbf{r})$ and $\hat{n} \cdot \nabla \psi(\mathbf{r})$ are known on S , then $\psi(\mathbf{r}')$ away from S could be found. This is similar to the expression of equivalence principle where $\hat{n} \cdot \nabla \psi(\mathbf{r})$ and $\psi(\mathbf{r})$ are equivalence sources on the surface S . In acoustics, these are known as single layer and double layer sources, respectively. The above is also the mathematical expression of the extinction theorem that says if \mathbf{r}' is outside V , the left-hand side evaluates to zero.

In (31.2.4), the surface integral on the right-hand side can be thought of as contributions from surface sources. Since $g(\mathbf{r}, \mathbf{r}')$ is a monopole Green's function, the first term can be thought of as radiation from single layer sources on the surface S . Also, since $\hat{n} \cdot \nabla g(\mathbf{r}, \mathbf{r}')$ is the field due to a dipole, the second term is thought of as contributions from double layer sources.

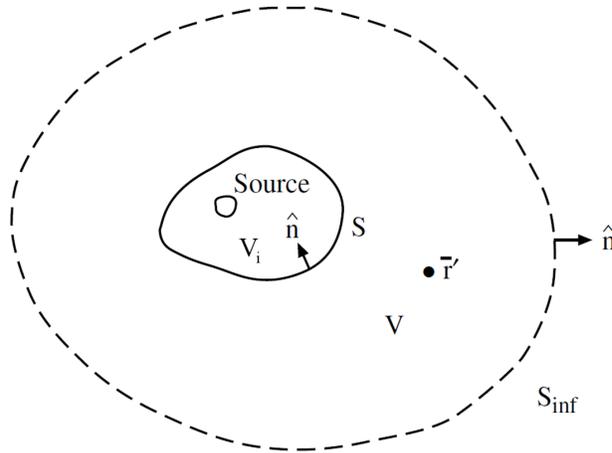


Figure 31.7: The geometry for deriving Huygens' principle. The radiation from the source can be replaced by equivalent sources on the surface S , and the field outside S can be calculated using (31.2.4).

If the volume V is bounded by S and S_{inf} as shown in Figure 31.7, then the surface integral in (31.2.4) should include an integral over S_{inf} . But when $S_{inf} \rightarrow \infty$, all fields look like plane wave, and $\nabla \rightarrow -\hat{r}jk$ on S_{inf} . Furthermore, $g(\mathbf{r} - \mathbf{r}') \sim O(1/r)$,³ when $r \rightarrow \infty$,

²The equivalence of the volume integral in (31.2.3) to the surface integral in (31.2.4) is also known as Green's theorem [81].

³The symbol "O" means "of the order."

and $\psi(\mathbf{r}) \sim O(1/r)$, when $r \rightarrow \infty$, if $\psi(\mathbf{r})$ is due to a source of finite extent. Then, the integral over S_{inf} in (31.2.4) vanishes, and (31.2.4) is valid for the case shown in Figure 31.7 as well but with the surface integral over surface S only. Here, the field outside S at \mathbf{r}' is expressible in terms of the field on S . This is similar to the inside-out equivalence principle we have discussed previously.

Notice that in deriving (31.2.4), $g(\mathbf{r}, \mathbf{r}')$ has only to satisfy (31.2.2) for both \mathbf{r} and \mathbf{r}' in V but no boundary condition has yet been imposed on $g(\mathbf{r}, \mathbf{r}')$. Therefore, if we further require that $g(\mathbf{r}, \mathbf{r}') = 0$ for $\mathbf{r} \in S$, then (31.2.4) becomes

$$\psi(\mathbf{r}') = - \oint_S dS \psi(\mathbf{r}) \hat{n} \cdot \nabla g(\mathbf{r}, \mathbf{r}'), \quad \mathbf{r}' \in V. \quad (31.2.5)$$

On the other hand, if require additionally that $g(\mathbf{r}, \mathbf{r}')$ satisfies (31.2.2) with the boundary condition $\hat{n} \cdot \nabla g(\mathbf{r}, \mathbf{r}') = 0$ for $\mathbf{r} \in S$, then (31.2.4) becomes

$$\psi(\mathbf{r}') = \oint_S dS g(\mathbf{r}, \mathbf{r}') \hat{n} \cdot \nabla \psi(\mathbf{r}), \quad \mathbf{r}' \in V. \quad (31.2.6)$$

Equations (31.2.4), (31.2.5), and (31.2.6) are various forms of Huygens' principle, or equivalence principle for scalar waves (acoustic waves) depending on the definition of $g(\mathbf{r}, \mathbf{r}')$. Equations (31.2.5) and (31.2.6) stipulate that only $\psi(\mathbf{r})$ or $\hat{n} \cdot \nabla \psi(\mathbf{r})$ need be known on the surface S in order to determine $\psi(\mathbf{r}')$. The above are analogous to the PEC and PMC equivalence principle considered previously. (Note that in the above derivation, k^2 could be a function of position as well.)

31.2.2 Electromagnetic Waves Case

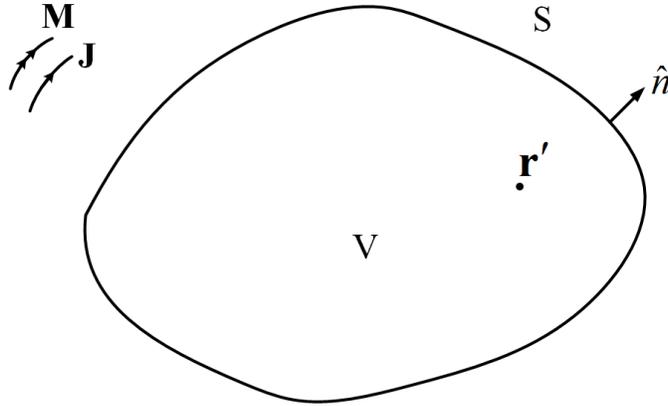


Figure 31.8: Derivation of the Huygens' principle for the electromagnetic case. One only needs to know the surface fields on surface S in order to determine the field at \mathbf{r}' inside V .

In a source-free region, an electromagnetic wave satisfies the vector wave equation

$$\nabla \times \nabla \times \mathbf{E}(\mathbf{r}) - k^2 \mathbf{E}(\mathbf{r}) = 0. \quad (31.2.7)$$

The analogue of the scalar Green's function for the scalar wave equation is the dyadic Green's function for the electromagnetic wave case [1, 31, 159, 160]. Moreover, the dyadic Green's function satisfies the equation⁴

$$\nabla \times \nabla \times \overline{\mathbf{G}}(\mathbf{r}, \mathbf{r}') - k^2 \overline{\mathbf{G}}(\mathbf{r}, \mathbf{r}') = \overline{\mathbf{I}} \delta(\mathbf{r} - \mathbf{r}'). \quad (31.2.8)$$

It can be shown by direct back substitution that the dyadic Green's function in free space is [160]

$$\overline{\mathbf{G}}(\mathbf{r}, \mathbf{r}') = \left(\overline{\mathbf{I}} + \frac{\nabla \nabla}{k^2} \right) g(\mathbf{r} - \mathbf{r}') \quad (31.2.9)$$

The above allows us to derive the vector Green's theorem [1, 31, 159].

Then, after post-multiplying (31.2.7) by $\overline{\mathbf{G}}(\mathbf{r}, \mathbf{r}')$, pre-multiplying (31.2.8) by $\mathbf{E}(\mathbf{r})$, subtracting the resultant equations and integrating the difference over volume V , considering two cases as we did for the scalar wave case, we have

$$\left. \begin{array}{l} \text{if } \mathbf{r}' \in V, \quad \mathbf{E}(\mathbf{r}') \\ \text{if } \mathbf{r}' \notin V, \quad 0 \end{array} \right\} = \int_V dV [\mathbf{E}(\mathbf{r}) \cdot \nabla \times \nabla \times \overline{\mathbf{G}}(\mathbf{r}, \mathbf{r}') \\ - \nabla \times \nabla \times \mathbf{E}(\mathbf{r}) \cdot \overline{\mathbf{G}}(\mathbf{r}, \mathbf{r}')] . \quad (31.2.10)$$

Next, using the vector identity that⁵

$$\begin{aligned} -\nabla \cdot [\mathbf{E}(\mathbf{r}) \times \nabla \times \overline{\mathbf{G}}(\mathbf{r}, \mathbf{r}') + \nabla \times \mathbf{E}(\mathbf{r}) \times \overline{\mathbf{G}}(\mathbf{r}, \mathbf{r}')] \\ = \mathbf{E}(\mathbf{r}) \cdot \nabla \times \nabla \times \overline{\mathbf{G}}(\mathbf{r}, \mathbf{r}') - \nabla \times \nabla \times \mathbf{E}(\mathbf{r}) \cdot \overline{\mathbf{G}}(\mathbf{r}, \mathbf{r}'), \end{aligned} \quad (31.2.11)$$

Equation (31.2.10), with the help of Gauss' divergence theorem, can be written as

$$\begin{aligned} \left. \begin{array}{l} \text{if } \mathbf{r}' \in V, \quad \mathbf{E}(\mathbf{r}') \\ \text{if } \mathbf{r}' \notin V, \quad 0 \end{array} \right\} = - \oint_S dS \hat{n} \cdot [\mathbf{E}(\mathbf{r}) \times \nabla \times \overline{\mathbf{G}}(\mathbf{r}, \mathbf{r}') + \nabla \times \mathbf{E}(\mathbf{r}) \times \overline{\mathbf{G}}(\mathbf{r}, \mathbf{r}')] \\ = - \oint_S dS [\hat{n} \times \mathbf{E}(\mathbf{r}) \cdot \nabla \times \overline{\mathbf{G}}(\mathbf{r}, \mathbf{r}') + i\omega\mu \hat{n} \times \mathbf{H}(\mathbf{r}) \cdot \overline{\mathbf{G}}(\mathbf{r}, \mathbf{r}')] . \end{aligned} \quad (31.2.12)$$

The above is just the vector analogue of (31.2.4). Since $\mathbf{E} \times \hat{n}$ and $\hat{n} \times \mathbf{H}$ are associated with surface magnetic current and surface electric current, respectively, the above can be

⁴A dyad is an outer product between two vectors, and it behaves like a tensor, except that a tensor is more general than a dyad. A purist will call the above a tensor Green's function, as the above is not a dyad in its strictest definition.

⁵This identity can be established by using the identity $\nabla \cdot (\mathbf{A} \times \mathbf{B}) = \mathbf{B} \cdot \nabla \times \mathbf{A} - \mathbf{A} \cdot \nabla \times \mathbf{B}$. We will have to let (31.2.11) act on a constant vector to convert the dyad into a vector before we can apply this identity. The equality of the volume integral in (31.2.10) to the surface integral in (31.2.12) is also known as vector Green's theorem [31, 159]. Earlier form of this theorem was known as Franz formula [161].

thought of having these equivalent surface currents radiating via the dyadic Green's function. Again, notice that (31.2.12) is derived via the use of (31.2.8), but no boundary condition has yet been imposed on $\bar{\mathbf{G}}(\mathbf{r}, \mathbf{r}')$ on S even though we have given a closed form solution for the free-space case.

Now, if we require the additional boundary condition that $\hat{n} \times \bar{\mathbf{G}}(\mathbf{r}, \mathbf{r}') = 0$ for $\mathbf{r} \in S$. This corresponds to a point source radiating in the presence of a PEC surface. Then (31.2.12) becomes

$$\mathbf{E}(\mathbf{r}') = - \oint_S dS \hat{n} \times \mathbf{E}(\mathbf{r}) \cdot \nabla \times \bar{\mathbf{G}}(\mathbf{r}, \mathbf{r}'), \quad \mathbf{r}' \in V \quad (31.2.13)$$

for it could be shown that $\hat{n} \times \mathbf{H} \cdot \bar{\mathbf{G}} = \mathbf{H} \cdot \hat{n} \times \bar{\mathbf{G}}$ implying that the second term in (31.2.12) is zero. On the other hand, if we require that $\hat{n} \times \nabla \times \bar{\mathbf{G}}(\mathbf{r}, \mathbf{r}') = 0$ for $\mathbf{r} \in S$, then (31.2.12) becomes

$$\mathbf{E}(\mathbf{r}') = -i\omega\mu \oint_S dS \hat{n} \times \mathbf{H}(\mathbf{r}) \cdot \bar{\mathbf{G}}(\mathbf{r}, \mathbf{r}'), \quad \mathbf{r}' \in V \quad (31.2.14)$$

Equations (31.2.13) and (31.2.14) state that $\mathbf{E}(\mathbf{r}')$ is determined if either $\hat{n} \times \mathbf{E}(\mathbf{r})$ or $\hat{n} \times \mathbf{H}(\mathbf{r})$ is specified on S . This is in agreement with the uniqueness theorem. These are the mathematical expressions of the PEC and PMC equivalence problems we have considered in the previous sections.

The dyadic Green's functions in (31.2.13) and (31.2.14) are for a closed cavity since boundary conditions are imposed on S for them. But the dyadic Green's function for an unbounded, homogeneous medium, given in (31.2.10) can be written as

$$\bar{\mathbf{G}}(\mathbf{r}, \mathbf{r}') = \frac{1}{k^2} [\nabla \times \nabla \times \bar{\mathbf{I}}g(\mathbf{r} - \mathbf{r}') - \bar{\mathbf{I}}\delta(\mathbf{r} - \mathbf{r}')], \quad (31.2.15)$$

$$\nabla \times \bar{\mathbf{G}}(\mathbf{r}, \mathbf{r}') = \nabla \times \bar{\mathbf{I}}g(\mathbf{r} - \mathbf{r}'). \quad (31.2.16)$$

Then, (31.2.12), for $\mathbf{r}' \in V$ and $\mathbf{r}' \neq \mathbf{r}$, becomes

$$\mathbf{E}(\mathbf{r}') = -\nabla' \times \oint_S dS g(\mathbf{r} - \mathbf{r}') \hat{n} \times \mathbf{E}(\mathbf{r}) + \frac{1}{i\omega\epsilon} \nabla' \times \nabla' \times \oint_S dS g(\mathbf{r} - \mathbf{r}') \hat{n} \times \mathbf{H}(\mathbf{r}). \quad (31.2.17)$$

The above can be applied to the geometry in Figure 31.7 where \mathbf{r}' is enclosed in S and S_{inf} . However, the integral over S_{inf} vanishes by virtue of the radiation condition as for (31.2.4). Then, (31.2.17) relates the field outside S at \mathbf{r}' in terms of only the field on S . This is similar to the inside-out problem in the equivalence theorem. It is also related to the fact that if the radiation condition is satisfied, then the field outside of the source region is uniquely satisfied. Hence, this is also related to the uniqueness theorem.

Bibliography

- [1] J. A. Kong, *Theory of electromagnetic waves*. New York, Wiley-Interscience, 1975.
- [2] A. Einstein *et al.*, “On the electrodynamics of moving bodies,” *Annalen der Physik*, vol. 17, no. 891, p. 50, 1905.
- [3] P. A. M. Dirac, “The quantum theory of the emission and absorption of radiation,” *Proceedings of the Royal Society of London. Series A, Containing Papers of a Mathematical and Physical Character*, vol. 114, no. 767, pp. 243–265, 1927.
- [4] R. J. Glauber, “Coherent and incoherent states of the radiation field,” *Physical Review*, vol. 131, no. 6, p. 2766, 1963.
- [5] C.-N. Yang and R. L. Mills, “Conservation of isotopic spin and isotopic gauge invariance,” *Physical review*, vol. 96, no. 1, p. 191, 1954.
- [6] G. t’Hooft, *50 years of Yang-Mills theory*. World Scientific, 2005.
- [7] C. W. Misner, K. S. Thorne, and J. A. Wheeler, *Gravitation*. Princeton University Press, 2017.
- [8] F. Teixeira and W. C. Chew, “Differential forms, metrics, and the reflectionless absorption of electromagnetic waves,” *Journal of Electromagnetic Waves and Applications*, vol. 13, no. 5, pp. 665–686, 1999.
- [9] W. C. Chew, E. Michielssen, J.-M. Jin, and J. Song, *Fast and efficient algorithms in computational electromagnetics*. Artech House, Inc., 2001.
- [10] A. Volta, “On the electricity excited by the mere contact of conducting substances of different kinds. in a letter from Mr. Alexander Volta, FRS Professor of Natural Philosophy in the University of Pavia, to the Rt. Hon. Sir Joseph Banks, Bart. KBPR S,” *Philosophical transactions of the Royal Society of London*, no. 90, pp. 403–431, 1800.
- [11] A.-M. Ampère, *Exposé méthodique des phénomènes électro-dynamiques, et des lois de ces phénomènes*. Bachelier, 1823.
- [12] —, *Mémoire sur la théorie mathématique des phénomènes électro-dynamiques uniquement déduite de l’expérience: dans lequel se trouvent réunis les Mémoires que M. Ampère a communiqués à l’Académie royale des Sciences, dans les séances des 4 et*

26 décembre 1820, 10 juin 1822, 22 décembre 1823, 12 septembre et 21 novembre 1825. Bachelier, 1825.

- [13] B. Jones and M. Faraday, *The life and letters of Faraday*. Cambridge University Press, 2010, vol. 2.
- [14] G. Kirchhoff, “Ueber die auflösung der gleichungen, auf welche man bei der untersuchung der linearen vertheilung galvanischer ströme geführt wird,” *Annalen der Physik*, vol. 148, no. 12, pp. 497–508, 1847.
- [15] L. Weinberg, “Kirchhoff’s’ third and fourth laws’,” *IRE Transactions on Circuit Theory*, vol. 5, no. 1, pp. 8–30, 1958.
- [16] T. Standage, *The Victorian Internet: The remarkable story of the telegraph and the nineteenth century’s online pioneers*. Phoenix, 1998.
- [17] J. C. Maxwell, “A dynamical theory of the electromagnetic field,” *Philosophical transactions of the Royal Society of London*, no. 155, pp. 459–512, 1865.
- [18] H. Hertz, “On the finite velocity of propagation of electromagnetic actions,” *Electric Waves*, vol. 110, 1888.
- [19] M. Romer and I. B. Cohen, “Roemer and the first determination of the velocity of light (1676),” *Isis*, vol. 31, no. 2, pp. 327–379, 1940.
- [20] A. Arons and M. Peppard, “Einstein’s proposal of the photon concept—a translation of the Annalen der Physik paper of 1905,” *American Journal of Physics*, vol. 33, no. 5, pp. 367–374, 1965.
- [21] A. Pais, “Einstein and the quantum theory,” *Reviews of Modern Physics*, vol. 51, no. 4, p. 863, 1979.
- [22] M. Planck, “On the law of distribution of energy in the normal spectrum,” *Annalen der physik*, vol. 4, no. 553, p. 1, 1901.
- [23] Z. Peng, S. De Graaf, J. Tsai, and O. Astafiev, “Tuneable on-demand single-photon source in the microwave range,” *Nature communications*, vol. 7, p. 12588, 2016.
- [24] B. D. Gates, Q. Xu, M. Stewart, D. Ryan, C. G. Willson, and G. M. Whitesides, “New approaches to nanofabrication: molding, printing, and other techniques,” *Chemical reviews*, vol. 105, no. 4, pp. 1171–1196, 2005.
- [25] J. S. Bell, “The debate on the significance of his contributions to the foundations of quantum mechanics, Bell’s Theorem and the Foundations of Modern Physics (A. van der Merwe, F. Selleri, and G. Tarozzi, eds.),” 1992.
- [26] D. J. Griffiths and D. F. Schroeter, *Introduction to quantum mechanics*. Cambridge University Press, 2018.
- [27] C. Pickover, *Archimedes to Hawking: Laws of science and the great minds behind them*. Oxford University Press, 2008.

- [28] R. Resnick, J. Walker, and D. Halliday, *Fundamentals of physics*. John Wiley, 1988.
- [29] S. Ramo, J. R. Whinnery, and T. Duzer van, *Fields and waves in communication electronics, Third Edition*. John Wiley & Sons, Inc., 1995, also 1965, 1984.
- [30] J. L. De Lagrange, “Recherches d’arithmétique,” *Nouveaux Mémoires de l’Académie de Berlin*, 1773.
- [31] J. A. Kong, *Electromagnetic Wave Theory*. EMW Publishing, 2008.
- [32] H. M. Schey, *Div, grad, curl, and all that: an informal text on vector calculus*. WW Norton New York, 2005.
- [33] R. P. Feynman, R. B. Leighton, and M. Sands, *The Feynman lectures on physics, Vols. I, II, & III: The new millennium edition*. Basic books, 2011, vol. 1,2,3.
- [34] W. C. Chew, *Waves and fields in inhomogeneous media*. IEEE Press, 1995, also 1990.
- [35] V. J. Katz, “The history of Stokes’ theorem,” *Mathematics Magazine*, vol. 52, no. 3, pp. 146–156, 1979.
- [36] W. K. Panofsky and M. Phillips, *Classical electricity and magnetism*. Courier Corporation, 2005.
- [37] T. Lancaster and S. J. Blundell, *Quantum field theory for the gifted amateur*. OUP Oxford, 2014.
- [38] W. C. Chew, “Fields and waves: Lecture notes for ECE 350 at UIUC,” <https://engineering.purdue.edu/wcchew/ece350.html>, 1990.
- [39] C. M. Bender and S. A. Orszag, *Advanced mathematical methods for scientists and engineers I: Asymptotic methods and perturbation theory*. Springer Science & Business Media, 2013.
- [40] J. M. Crowley, *Fundamentals of applied electrostatics*. Krieger Publishing Company, 1986.
- [41] C. Balanis, *Advanced Engineering Electromagnetics*. Hoboken, NJ, USA: Wiley, 2012.
- [42] J. D. Jackson, *Classical electrodynamics*. John Wiley & Sons, 1999.
- [43] R. Courant and D. Hilbert, *Methods of Mathematical Physics: Partial Differential Equations*. John Wiley & Sons, 2008.
- [44] L. Esaki and R. Tsu, “Superlattice and negative differential conductivity in semiconductors,” *IBM Journal of Research and Development*, vol. 14, no. 1, pp. 61–65, 1970.
- [45] E. Kudeki and D. C. Munson, *Analog Signals and Systems*. Upper Saddle River, NJ, USA: Pearson Prentice Hall, 2009.
- [46] A. V. Oppenheim and R. W. Schaffer, *Discrete-time signal processing*. Pearson Education, 2014.

- [47] R. F. Harrington, *Time-harmonic electromagnetic fields*. McGraw-Hill, 1961.
- [48] E. C. Jordan and K. G. Balmain, *Electromagnetic waves and radiating systems*. Prentice-Hall, 1968.
- [49] G. Agarwal, D. Pattanayak, and E. Wolf, “Electromagnetic fields in spatially dispersive media,” *Physical Review B*, vol. 10, no. 4, p. 1447, 1974.
- [50] S. L. Chuang, *Physics of photonic devices*. John Wiley & Sons, 2012, vol. 80.
- [51] B. E. Saleh and M. C. Teich, *Fundamentals of photonics*. John Wiley & Sons, 2019.
- [52] M. Born and E. Wolf, *Principles of optics: electromagnetic theory of propagation, interference and diffraction of light*. Elsevier, 2013.
- [53] R. W. Boyd, *Nonlinear optics*. Elsevier, 2003.
- [54] Y.-R. Shen, *The principles of nonlinear optics*. New York, Wiley-Interscience, 1984.
- [55] N. Bloembergen, *Nonlinear optics*. World Scientific, 1996.
- [56] P. C. Krause, O. Wasynczuk, and S. D. Sudhoff, *Analysis of electric machinery*. McGraw-Hill New York, 1986.
- [57] A. E. Fitzgerald, C. Kingsley, S. D. Umans, and B. James, *Electric machinery*. McGraw-Hill New York, 2003, vol. 5.
- [58] M. A. Brown and R. C. Semelka, *MRI.: Basic Principles and Applications*. John Wiley & Sons, 2011.
- [59] C. A. Balanis, *Advanced engineering electromagnetics*. John Wiley & Sons, 1999, also 1989.
- [60] Wikipedia, “Lorentz force,” https://en.wikipedia.org/wiki/Lorentz_force/, accessed: 2019-09-06.
- [61] R. O. Dendy, *Plasma physics: an introductory course*. Cambridge University Press, 1995.
- [62] P. Sen and W. C. Chew, “The frequency dependent dielectric and conductivity response of sedimentary rocks,” *Journal of microwave power*, vol. 18, no. 1, pp. 95–105, 1983.
- [63] D. A. Miller, *Quantum Mechanics for Scientists and Engineers*. Cambridge, UK: Cambridge University Press, 2008.
- [64] W. C. Chew, “Quantum mechanics made simple: Lecture notes for ECE 487 at UIUC,” <http://wcc Chew.ece.illinois.edu/chew/course/QMAll20161206.pdf>, 2016.
- [65] B. G. Streetman and S. Banerjee, *Solid state electronic devices*. Prentice hall Englewood Cliffs, NJ, 1995.

- [66] Smithsonian, “This 1600-year-old goblet shows that the romans were nanotechnology pioneers,” <https://www.smithsonianmag.com/history/this-1600-year-old-goblet-shows-that-the-romans-were-nanotechnology-pioneers-787224/>, accessed: 2019-09-06.
- [67] K. G. Budden, *Radio waves in the ionosphere*. Cambridge University Press, 2009.
- [68] R. Fitzpatrick, *Plasma physics: an introduction*. CRC Press, 2014.
- [69] G. Strang, *Introduction to linear algebra*. Wellesley-Cambridge Press Wellesley, MA, 1993, vol. 3.
- [70] K. C. Yeh and C.-H. Liu, “Radio wave scintillations in the ionosphere,” *Proceedings of the IEEE*, vol. 70, no. 4, pp. 324–360, 1982.
- [71] J. Kraus, *Electromagnetics*. McGraw-Hill, 1984, also 1953, 1973, 1981.
- [72] Wikipedia, “Circular polarization,” https://en.wikipedia.org/wiki/Circular_polarization.
- [73] Q. Zhan, “Cylindrical vector beams: from mathematical concepts to applications,” *Advances in Optics and Photonics*, vol. 1, no. 1, pp. 1–57, 2009.
- [74] H. Haus, *Electromagnetic Noise and Quantum Optical Measurements*, ser. Advanced Texts in Physics. Springer Berlin Heidelberg, 2000.
- [75] W. C. Chew, “Lectures on theory of microwave and optical waveguides, for ECE 531 at UIUC,” <https://engineering.purdue.edu/wcchew/course/tqwAll20160215.pdf>, 2016.
- [76] L. Brillouin, *Wave propagation and group velocity*. Academic Press, 1960.
- [77] R. Plonsey and R. E. Collin, *Principles and applications of electromagnetic fields*. McGraw-Hill, 1961.
- [78] M. N. Sadiku, *Elements of electromagnetics*. Oxford University Press, 2014.
- [79] A. Wadhwa, A. L. Dal, and N. Malhotra, “Transmission media,” <https://www.slideshare.net/abhishekwadhw786/transmission-media-9416228>.
- [80] P. H. Smith, “Transmission line calculator,” *Electronics*, vol. 12, no. 1, pp. 29–31, 1939.
- [81] F. B. Hildebrand, *Advanced calculus for applications*. Prentice-Hall, 1962.
- [82] J. Schutt-Aine, “Experiment02-coaxial transmission line measurement using slotted line,” <http://emlab.uiuc.edu/ece451/ECE451Lab02.pdf>.
- [83] D. M. Pozar, E. J. K. Knapp, and J. B. Mead, “ECE 584 microwave engineering laboratory notebook,” http://www.ecs.umass.edu/ece/ece584/ECE584_lab_manual.pdf, 2004.
- [84] R. E. Collin, *Field theory of guided waves*. McGraw-Hill, 1960.

- [85] Q. S. Liu, S. Sun, and W. C. Chew, “A potential-based integral equation method for low-frequency electromagnetic problems,” *IEEE Transactions on Antennas and Propagation*, vol. 66, no. 3, pp. 1413–1426, 2018.
- [86] M. Born and E. Wolf, *Principles of optics: electromagnetic theory of propagation, interference and diffraction of light*. Pergamon, 1986, first edition 1959.
- [87] Wikipedia, “Snell’s law,” https://en.wikipedia.org/wiki/Snell's_law.
- [88] G. Tyras, *Radiation and propagation of electromagnetic waves*. Academic Press, 1969.
- [89] L. Brekhovskikh, *Waves in layered media*. Academic Press, 1980.
- [90] Scholarpedia, “Goos-hanchen effect,” http://www.scholarpedia.org/article/Goos-Hanchen_effect.
- [91] K. Kao and G. A. Hockham, “Dielectric-fibre surface waveguides for optical frequencies,” in *Proceedings of the Institution of Electrical Engineers*, vol. 113, no. 7. IET, 1966, pp. 1151–1158.
- [92] E. Glytsis, “Slab waveguide fundamentals,” http://users.ntua.gr/eglytsis/IO/Slab_Waveguides_p.pdf, 2018.
- [93] Wikipedia, “Optical fiber,” https://en.wikipedia.org/wiki/Optical_fiber.
- [94] Atlantic Cable, “1869 indo-european cable,” <https://atlantic-cable.com/Cables/1869IndoEur/index.htm>.
- [95] Wikipedia, “Submarine communications cable,” https://en.wikipedia.org/wiki/Submarine_communications_cable.
- [96] D. Brewster, “On the laws which regulate the polarisation of light by reflexion from transparent bodies,” *Philosophical Transactions of the Royal Society of London*, vol. 105, pp. 125–159, 1815.
- [97] Wikipedia, “Brewster’s angle,” https://en.wikipedia.org/wiki/Brewster's_angle.
- [98] H. Raether, “Surface plasmons on smooth surfaces,” in *Surface plasmons on smooth and rough surfaces and on gratings*. Springer, 1988, pp. 4–39.
- [99] E. Kretschmann and H. Raether, “Radiative decay of non radiative surface plasmons excited by light,” *Zeitschrift für Naturforschung A*, vol. 23, no. 12, pp. 2135–2136, 1968.
- [100] Wikipedia, “Surface plasmon,” https://en.wikipedia.org/wiki/Surface_plasmon.
- [101] Wikimedia, “Gaussian wave packet,” https://commons.wikimedia.org/wiki/File:Gaussian_wave_packet.svg.
- [102] Wikipedia, “Charles K. Kao,” https://en.wikipedia.org/wiki/Charles_K._Kao.
- [103] H. B. Callen and T. A. Welton, “Irreversibility and generalized noise,” *Physical Review*, vol. 83, no. 1, p. 34, 1951.

- [104] R. Kubo, "The fluctuation-dissipation theorem," *Reports on progress in physics*, vol. 29, no. 1, p. 255, 1966.
- [105] C. Lee, S. Lee, and S. Chuang, "Plot of modal field distribution in rectangular and circular waveguides," *IEEE transactions on microwave theory and techniques*, vol. 33, no. 3, pp. 271–274, 1985.
- [106] W. C. Chew, *Waves and Fields in Inhomogeneous Media*. IEEE Press, 1996.
- [107] M. Abramowitz and I. A. Stegun, *Handbook of mathematical functions: with formulas, graphs, and mathematical tables*. Courier Corporation, 1965, vol. 55.
- [108] —, "Handbook of mathematical functions: with formulas, graphs, and mathematical tables," <http://people.math.sfu.ca/~cbm/aands/index.htm>.
- [109] W. C. Chew, W. Sha, and Q. I. Dai, "Green's dyadic, spectral function, local density of states, and fluctuation dissipation theorem," *arXiv preprint arXiv:1505.01586*, 2015.
- [110] Wikipedia, "Very Large Array," https://en.wikipedia.org/wiki/Very_Large_Array.
- [111] C. A. Balanis and E. Holzman, "Circular waveguides," *Encyclopedia of RF and Microwave Engineering*, 2005.
- [112] M. Al-Hakkak and Y. Lo, "Circular waveguides with anisotropic walls," *Electronics Letters*, vol. 6, no. 24, pp. 786–789, 1970.
- [113] Wikipedia, "Horn Antenna," https://en.wikipedia.org/wiki/Horn_antenna.
- [114] P. Silvester and P. Benedek, "Microstrip discontinuity capacitances for right-angle bends, t junctions, and crossings," *IEEE Transactions on Microwave Theory and Techniques*, vol. 21, no. 5, pp. 341–346, 1973.
- [115] R. Garg and I. Bahl, "Microstrip discontinuities," *International Journal of Electronics Theoretical and Experimental*, vol. 45, no. 1, pp. 81–87, 1978.
- [116] P. Smith and E. Turner, "A bistable fabry-perot resonator," *Applied Physics Letters*, vol. 30, no. 6, pp. 280–281, 1977.
- [117] A. Yariv, *Optical electronics*. Saunders College Publ., 1991.
- [118] Wikipedia, "Klystron," <https://en.wikipedia.org/wiki/Klystron>.
- [119] —, "Magnetron," https://en.wikipedia.org/wiki/Cavity_magnetron.
- [120] —, "Absorption Wavemeter," https://en.wikipedia.org/wiki/Absorption_wavemeter.
- [121] W. C. Chew, M. S. Tong, and B. Hu, "Integral equation methods for electromagnetic and elastic waves," *Synthesis Lectures on Computational Electromagnetics*, vol. 3, no. 1, pp. 1–241, 2008.
- [122] A. D. Yaghjian, "Reflections on Maxwell's treatise," *Progress In Electromagnetics Research*, vol. 149, pp. 217–249, 2014.

- [123] L. Nagel and D. Pederson, "Simulation program with integrated circuit emphasis," in *Midwest Symposium on Circuit Theory*, 1973.
- [124] S. A. Schelkunoff and H. T. Friis, *Antennas: theory and practice*. Wiley New York, 1952, vol. 639.
- [125] H. G. Schantz, "A brief history of uwb antennas," *IEEE Aerospace and Electronic Systems Magazine*, vol. 19, no. 4, pp. 22–26, 2004.
- [126] E. Kudeki, "Fields and Waves," <http://remote2.ece.illinois.edu/~erhan/FieldsWaves/ECE350lectures.html>.
- [127] Wikipedia, "Antenna Aperture," https://en.wikipedia.org/wiki/Antenna_aperture.
- [128] C. A. Balanis, *Antenna theory: analysis and design*. John Wiley & Sons, 2016.
- [129] R. W. P. King, G. S. Smith, M. Owens, and T. Wu, "Antennas in matter: Fundamentals, theory, and applications," *NASA STI/Recon Technical Report A*, vol. 81, 1981.
- [130] H. Yagi and S. Uda, "Projector of the sharpest beam of electric waves," *Proceedings of the Imperial Academy*, vol. 2, no. 2, pp. 49–52, 1926.
- [131] Wikipedia, "Yagi-Uda Antenna," https://en.wikipedia.org/wiki/Yagi-Uda_antenna.
- [132] Antenna-theory.com, "Slot Antenna," <http://www.antenna-theory.com/antennas/aperture/slot.php>.
- [133] A. D. Olver and P. J. Clarricoats, *Microwave horns and feeds*. IET, 1994, vol. 39.
- [134] B. Thomas, "Design of corrugated conical horns," *IEEE Transactions on Antennas and Propagation*, vol. 26, no. 2, pp. 367–372, 1978.
- [135] P. J. B. Clarricoats and A. D. Olver, *Corrugated horns for microwave antennas*. IET, 1984, no. 18.
- [136] P. Gibson, "The vivaldi aerial," in *1979 9th European Microwave Conference*. IEEE, 1979, pp. 101–105.
- [137] Wikipedia, "Vivaldi Antenna," https://en.wikipedia.org/wiki/Vivaldi_antenna.
- [138] —, "Cassegrain Antenna," https://en.wikipedia.org/wiki/Cassegrain_antenna.
- [139] —, "Cassegrain Reflector," https://en.wikipedia.org/wiki/Cassegrain_reflector.
- [140] W. A. Imbriale, S. S. Gao, and L. Boccia, *Space antenna handbook*. John Wiley & Sons, 2012.
- [141] J. A. Encinar, "Design of two-layer printed reflectarrays using patches of variable size," *IEEE Transactions on Antennas and Propagation*, vol. 49, no. 10, pp. 1403–1410, 2001.
- [142] D.-C. Chang and M.-C. Huang, "Microstrip reflectarray antenna with offset feed," *Electronics Letters*, vol. 28, no. 16, pp. 1489–1491, 1992.

- [143] G. Minatti, M. Faenzi, E. Martini, F. Caminita, P. De Vita, D. González-Ovejero, M. Sabbadini, and S. Maci, “Modulated metasurface antennas for space: Synthesis, analysis and realizations,” *IEEE Transactions on Antennas and Propagation*, vol. 63, no. 4, pp. 1288–1300, 2014.
- [144] X. Gao, X. Han, W.-P. Cao, H. O. Li, H. F. Ma, and T. J. Cui, “Ultrawideband and high-efficiency linear polarization converter based on double v-shaped metasurface,” *IEEE Transactions on Antennas and Propagation*, vol. 63, no. 8, pp. 3522–3530, 2015.
- [145] D. De Schweinitz and T. L. Frey Jr, “Artificial dielectric lens antenna,” Nov. 13 2001, US Patent 6,317,092.
- [146] K.-L. Wong, “Planar antennas for wireless communications,” *Microwave Journal*, vol. 46, no. 10, pp. 144–145, 2003.
- [147] H. Nakano, M. Yamazaki, and J. Yamauchi, “Electromagnetically coupled curl antenna,” *Electronics Letters*, vol. 33, no. 12, pp. 1003–1004, 1997.
- [148] K. Lee, K. Luk, K.-F. Tong, S. Shum, T. Huynh, and R. Lee, “Experimental and simulation studies of the coaxially fed U-slot rectangular patch antenna,” *IEE Proceedings-Microwaves, Antennas and Propagation*, vol. 144, no. 5, pp. 354–358, 1997.
- [149] K. Luk, C. Mak, Y. Chow, and K. Lee, “Broadband microstrip patch antenna,” *Electronics letters*, vol. 34, no. 15, pp. 1442–1443, 1998.
- [150] M. Bolic, D. Simplot-Ryl, and I. Stojmenovic, *RFID systems: research trends and challenges*. John Wiley & Sons, 2010.
- [151] D. M. Dobkin, S. M. Weigand, and N. Iyer, “Segmented magnetic antennas for near-field UHF RFID,” *Microwave Journal*, vol. 50, no. 6, p. 96, 2007.
- [152] Z. N. Chen, X. Qing, and H. L. Chung, “A universal UHF RFID reader antenna,” *IEEE transactions on microwave theory and techniques*, vol. 57, no. 5, pp. 1275–1282, 2009.
- [153] C.-T. Chen, *Linear system theory and design*. Oxford University Press, Inc., 1998.
- [154] S. H. Schot, “Eighty years of Sommerfeld’s radiation condition,” *Historia mathematica*, vol. 19, no. 4, pp. 385–401, 1992.
- [155] A. Ishimaru, *Electromagnetic wave propagation, radiation, and scattering from fundamentals to applications*. Wiley Online Library, 2017, also 1991.
- [156] A. E. H. Love, “I. the integration of the equations of propagation of electric waves,” *Philosophical Transactions of the Royal Society of London. Series A, Containing Papers of a Mathematical or Physical Character*, vol. 197, no. 287-299, pp. 1–45, 1901.
- [157] Wikipedia, “Christiaan Huygens,” https://en.wikipedia.org/wiki/Christiaan_Huygens.
- [158] —, “George Green (mathematician),” [https://en.wikipedia.org/wiki/George_Green_\(mathematician\)](https://en.wikipedia.org/wiki/George_Green_(mathematician)).

- [159] C.-T. Tai, *Dyadic Green's Functions in Electromagnetic Theory*. PA: International Textbook, Scranton, 1971.
- [160] —, *Dyadic Green functions in electromagnetic theory*. Institute of Electrical & Electronics Engineers (IEEE), 1994.
- [161] W. Franz, "Zur formulierung des huygensschen prinzipts," *Zeitschrift für Naturforschung A*, vol. 3, no. 8-11, pp. 500–506, 1948.
- [162] J. A. Stratton, *Electromagnetic Theory*. McGraw-Hill Book Company, Inc., 1941.
- [163] J. D. Jackson, *Classical Electrodynamics*. John Wiley & Sons, 1962.
- [164] W. Meissner and R. Ochsenfeld, "Ein neuer effekt bei eintritt der supraleitfähigkeit," *Naturwissenschaften*, vol. 21, no. 44, pp. 787–788, 1933.
- [165] Wikipedia, "Superconductivity," <https://en.wikipedia.org/wiki/Superconductivity>.
- [166] D. Sievenpiper, L. Zhang, R. F. Broas, N. G. Alexopolous, and E. Yablonovitch, "High-impedance electromagnetic surfaces with a forbidden frequency band," *IEEE Transactions on Microwave Theory and techniques*, vol. 47, no. 11, pp. 2059–2074, 1999.