

ECE 604 Electromagnetic Field Theory

Spring 2020

Homework No. 9. Due Date: Apr 17, 2020.

Read lecture notes 1-33.

1. (i) Using reciprocity theorem, show that an impressed current source on a PEC surface cannot radiate any field.
- (ii) The dyadic Green's function is homomorphic to the scalar Green's function, albeit with more complicated vector algebra. By direct back substitution, show that the solution to the following equation

$$\nabla \times \nabla \times \bar{\mathbf{G}}(\mathbf{r}, \mathbf{r}') - k^2 \bar{\mathbf{G}}(\mathbf{r}, \mathbf{r}') = \bar{\mathbf{I}} \delta(\mathbf{r} - \mathbf{r}').$$

is given by

$$\bar{\mathbf{G}}(\mathbf{r}, \mathbf{r}') = \left(\bar{\mathbf{I}} + \frac{\nabla \nabla}{k^2} \right) g(\mathbf{r} - \mathbf{r}')$$

- (iii) Given the vector wave equation for the electric field has a source term, namely that

$$\nabla \times \nabla \times \mathbf{E} - k^2 \mathbf{E} = -j\omega\mu \mathbf{J}$$

By the principle of linear superposition, show that the solution to the above equation can be written as

$$\mathbf{E}(\mathbf{r}) = -j\omega\mu \iiint d\mathbf{r}' \bar{\mathbf{G}}(\mathbf{r}, \mathbf{r}') \bullet \mathbf{J}(\mathbf{r}')$$

2. (i) Explain why perfect electric conductor is not necessary to shield out the electric field at statics.
- (ii) We simplify the cavity-backed slot antenna to a geometry shown below. Its radiation behavior can be replaced by an equivalence problem 1 shown below. What should \mathbf{J}_s and \mathbf{M}_s be in the equivalence problem 1 so that the fields to the left are zero, and the equivalence currents radiate to the right to create the same fields?

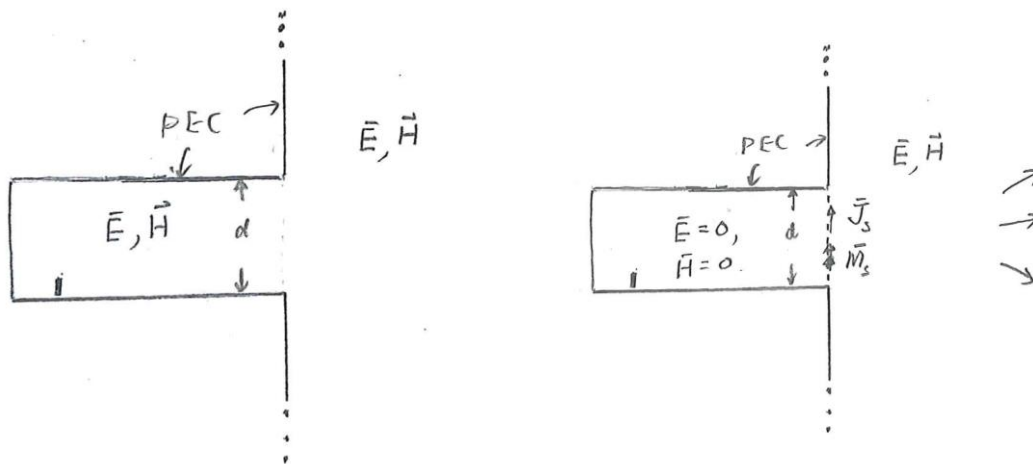


Figure 1. Original problem (left). Equivalence problem 1 (right).

(iii) Explain why the equivalence problem 1 can be replaced by equivalence problem 2 and equivalence problem 3 shown below. What addition theorem do you need to arrive at equivalence problem 3? Given the values of $\bar{\mathbf{M}}_{SA}$ and $\bar{\mathbf{M}}_{SB}$ below in terms of $\bar{\mathbf{M}}_s$ in Part (iii) above.

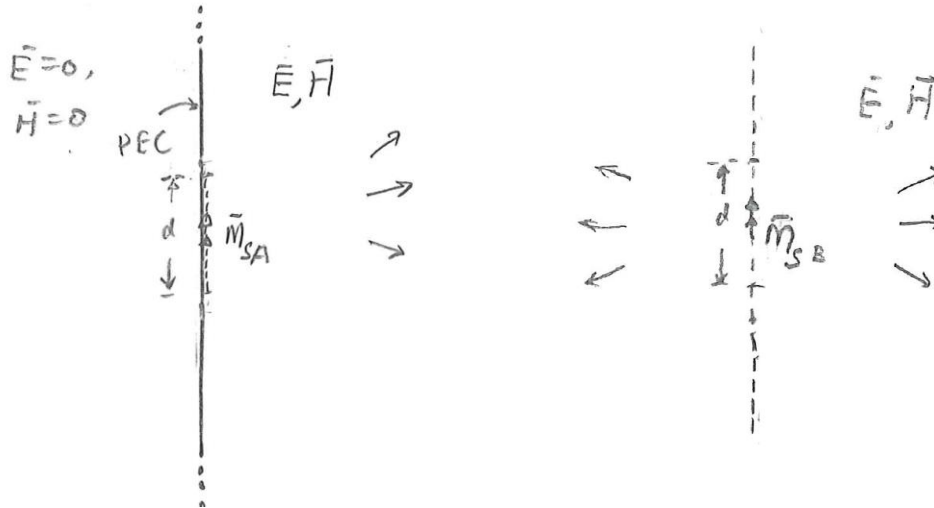


Figure 2. Equivalence problem 2 (left). Equivalence problem 3 (right).

3. (i) Derive the following equations of the notes on Gaussian beam and paraxial wave equation.

$$\Psi(x, y, z) = \frac{A_0}{\sqrt{1 + z^2/b^2}} e^{-j\beta \frac{x^2+y^2}{2R}} e^{-\frac{x^2+y^2}{w^2}} e^{j\psi}$$

where

$$w^2 = \frac{2b}{\beta} \left(1 + \frac{z^2}{b^2} \right), \quad R = \frac{z^2 + b^2}{z}, \quad \psi = \tan^{-1} \left(\frac{z}{b} \right)$$

(ii) Explain why R is related to the radius of curvature of the wavefront of the Gaussian beam.

4. Use Fermat's principle, derive the law of reflection for a simple interface, and then a metasurface where a phase shift of $\Phi(x, y)$ can happen at the surface.