Mix Design for HMA Recycling

Rebecca McDaniel

North Central Superpave Center

Rocky Mountain Asphalt Conference February 21, 2008

Goals of Recycling

- Reuse a valuable resource
- Avoid a disposal problem
- Save money
- Produce a recycled mix that performs as well as, or better than, the original mix



Possible Effects of RAP



- At low RAP contents, there may not be enough old material to significantly affect properties of blend
- At higher RAP contents, the hardened RAP binder may stiffen the mix
 - Good for rutting, not so good for cracking
- The aggregate in the RAP may affect structure and stability of the mix

How can we ensure performance?



- Account for the RAP aggregate and binder in the mix design
 - Adjust design as necessary
 - Tiered system
- Control variability
 - Treat the RAP like another stockpile
 - Practice good stockpile management
 - Process the RAP, if needed

RAP Mix Design Basics



Aggregate Considerations

- Include RAP aggregate in determinations of:
 - Specific gravity
 - Gradation
 - Fine aggregate angularity
 - Coarse aggregate angularity
 - Flat and elongated content

RAP Specific Gravity



- Use RAP agg effective specific gravity, or
- Backcalculate bulk s.g. from Rice density and absorption.
- Agency discretion.



RAP Mix Design Basics

Binder Considerations


- Reduce added binder to account for RAP binder
- For higher RAP contents, use softer virgin binder grade

Current Tiers



- Up to 15% RAP, no change in binder grade.
- 16-25% RAP, lower binder grade by one increment.
- More than 25%, create blending charts.
 - Assumes linear blending
 - Extract, recover and test RAP binder
 - High, low and intermediate temperatures


High Temperature Blending Chart, Known RAP Content

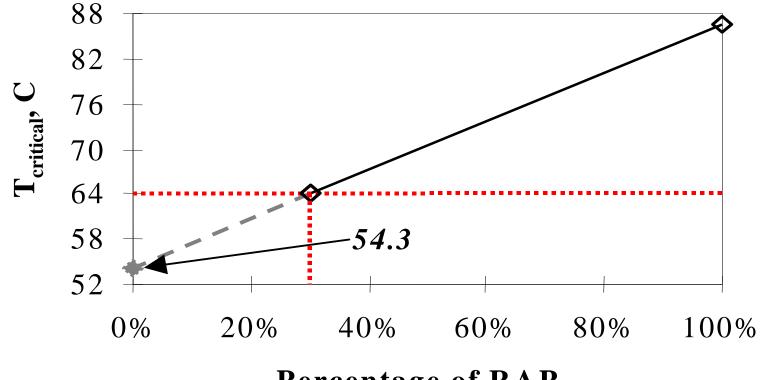

Percentage of RAP



Low Temperature Blending Chart, Known Virgin Binder

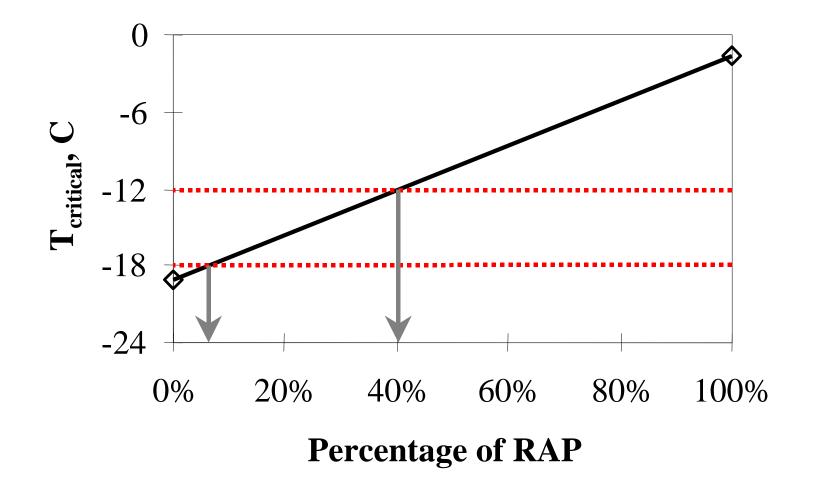



Practical Considerations

- Easy to design for 20-25% RAP.
- Above 15% RAP may require soft virgin binders.
 - Cost and construction impacts
- At high RAP contents, gradation and properties of RAP aggregate may limit amount of RAP used.
 - Processing or screening RAP



Practical Considerations



- RAP variability may need to be controlled to meet production tolerances.
- Blending charts and soft binder grades may limit use of high RAP contents unless there are strong economic incentives.

Interest in More RAP Use

- Strong incentives to increase RAP use mainly economics, environment, supply
 - Use RAP in more mixes (i.e. surfaces)
 - Use higher RAP quantities
- Still barriers to increased use state specs, variability, performance concerns
- Good news people are working on overcoming these obstacles.



HMA Recycling ETG



- FHWA initiated in May 2007
- Goals
 - Provide information to help states/industry increase use to current allowable levels
 - Work to increase allowable levels to more than 25%
- Among activities so far:
 - Identification of obstacles to higher use
 - Identification of research needs

Top Ten Research Needs

- 1. Performance test for evaluating RAP
- 2. Best practices manual
- 3. Solventless method to characterize RAP
- 4. Binder grade changes necessary?
- 5. Degree of blending of binders
- 6. Field performance of high RAP mixes
- 7. Replicating plant heating in lab
- 8. Guidance for states to allow higher RAP
- 9. Identification of RAP variability
- 10. Guidance for processing/fractionating RAP



Research Underway



- NCHRP Project on designing high RAP content mixes
- FHWA funded work on high RAP contents (NCAT/NCSC/UNH)
- RAP in Surface Mixes (NCSC)
- RAP Plant Mix Study (NCSC/HRG)
- State sponsored research across the country – WMA with RAP, characterizing RAP

In the Meantime



- Current RAP specifications can be used to produce quality hot mix asphalt.
- RAP mixes can perform as well as, or better than, virgin mixes.

The Future



- High RAP content mixes may become more common.
- Future research may lead to refinements to current system, including new test methods.
- RAP mixes will continue to be valuable, high performing mixtures for widespread use.

More info:



Rebecca S. McDaniel Technical Director North Central Superpave Center 765/463-2317 ext. 226 rsmcdani@purdue.edu

https://engineering.purdue.edu/NCSC/