Wildfires Contaminate Drinking Water Distribution Systems and Building Plumbing

Andrew J. Whelton, Ph.D.

Civil, Environmental, and Ecological Engineering

awhelton@purdue.edu

@TheWheltonGroup

Web: PlumbingSafety.org

Foundations for Improving Resilience in the Energy Sector Against Wildfires on Alaskan Lands (FIREWALL) Workshop

PURDUE UNIVERSITY

FIRE·WALL

September 2021

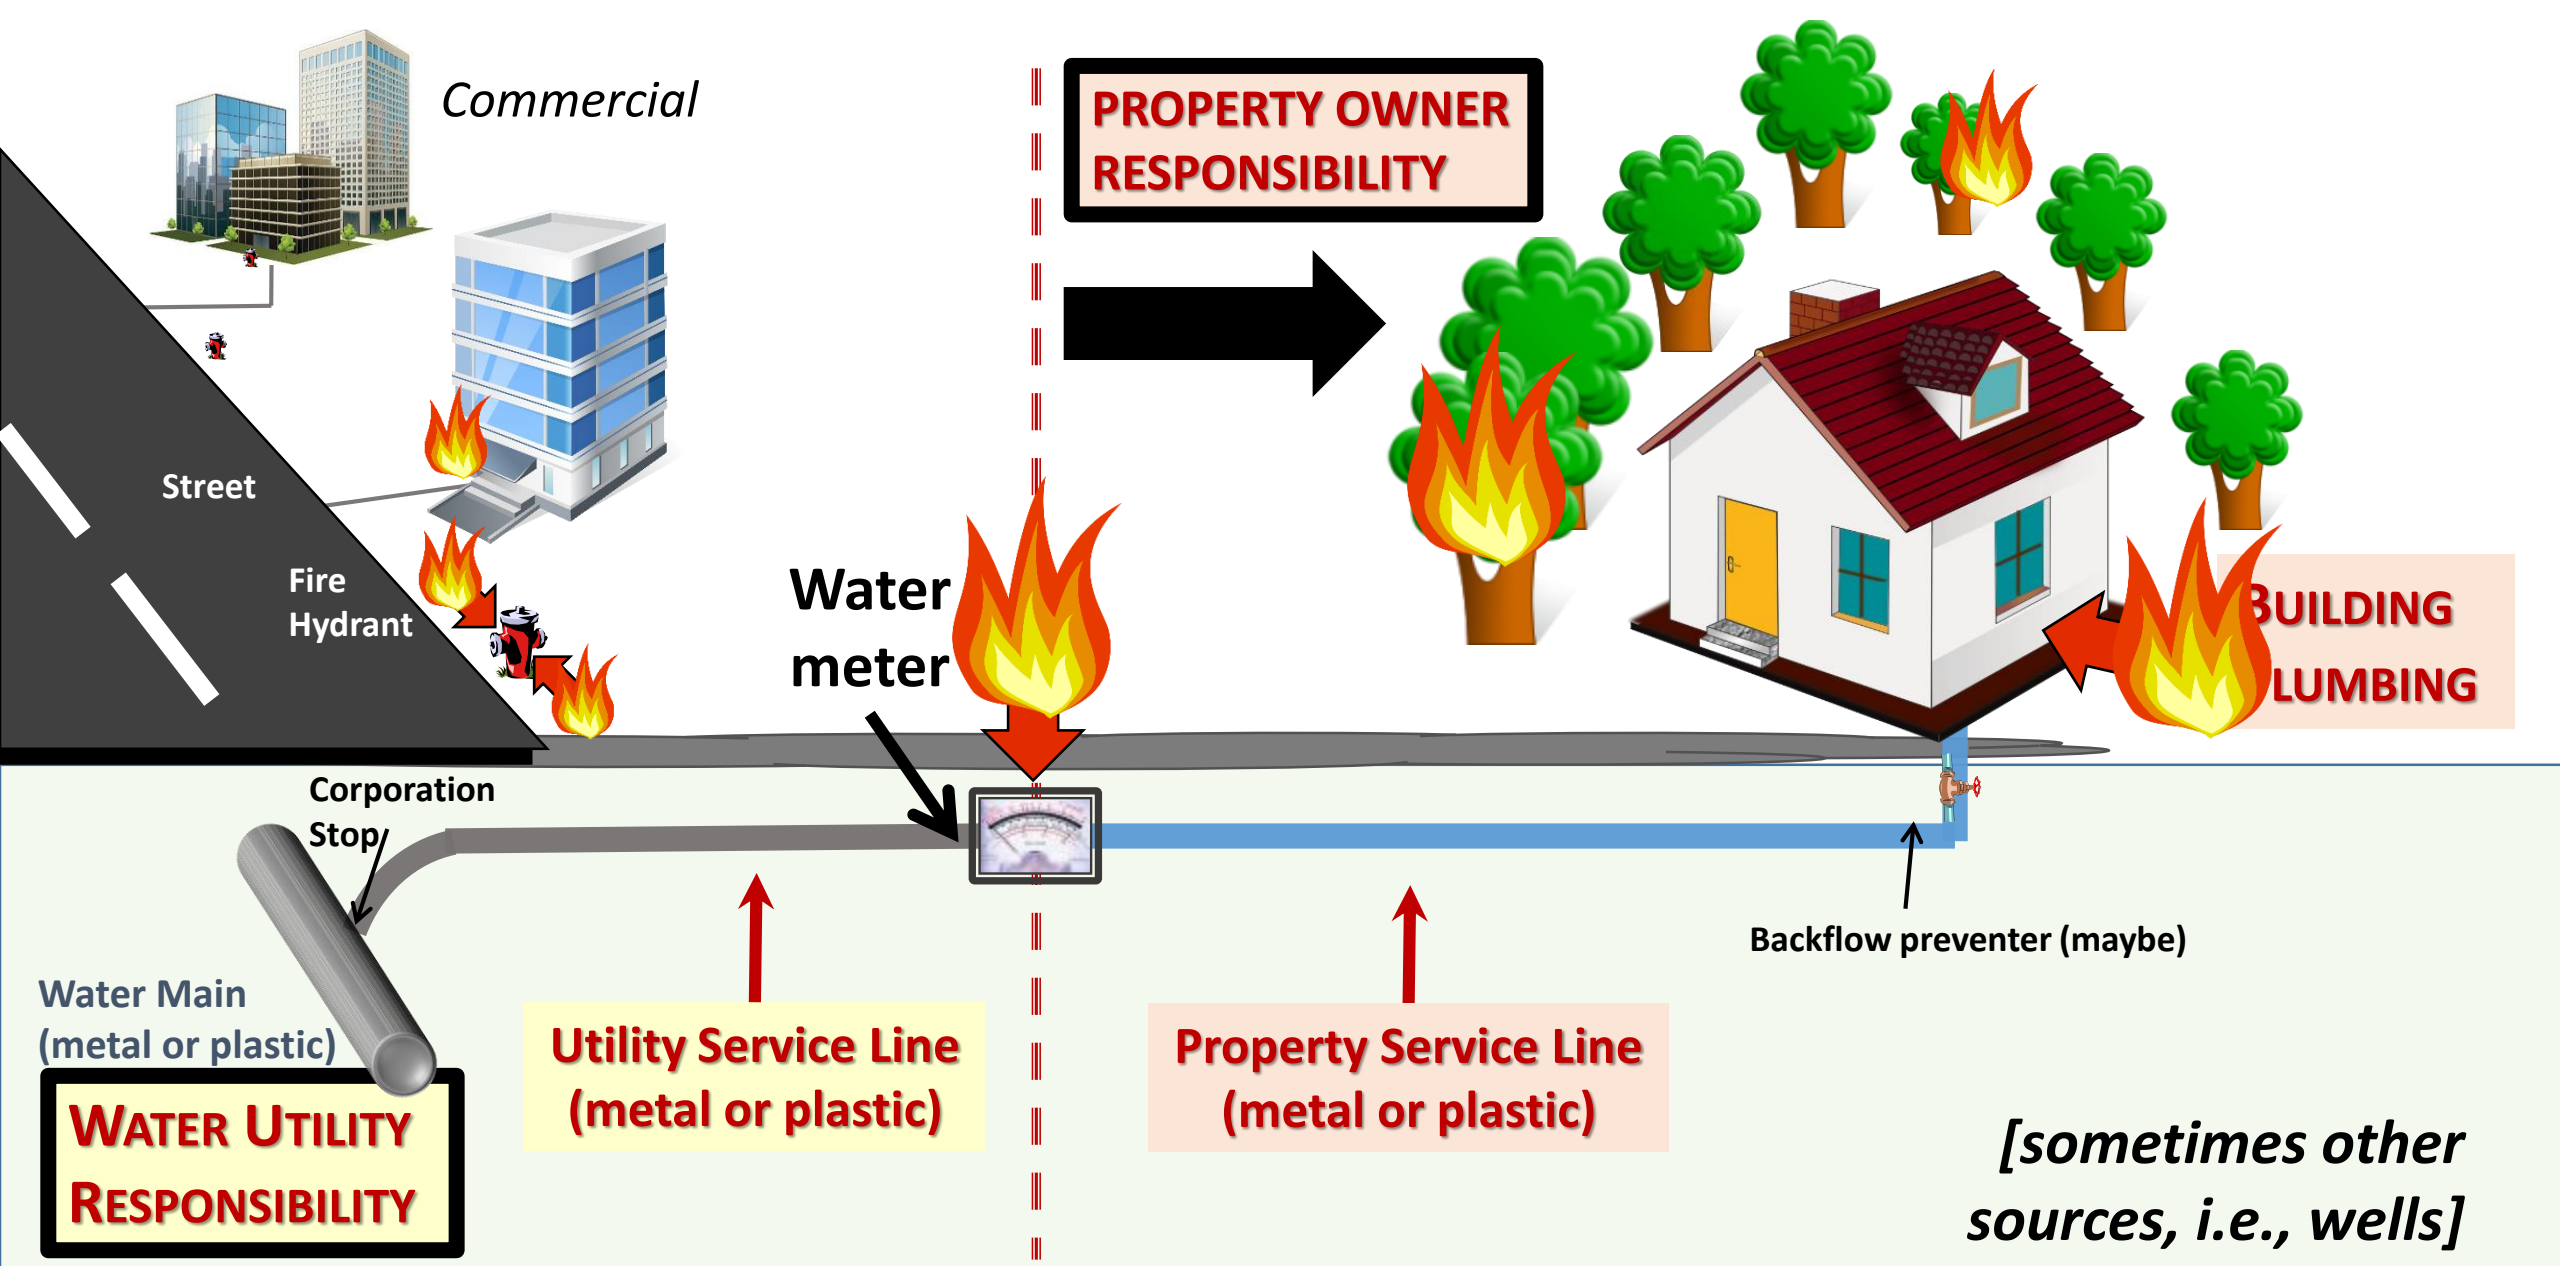
Commercial
PROPERTY OWNER RESPONSIBILITY
Street
Fire Hydrant
Water meter
BUILDING PLUMBING
Corporation Stop
Backflow preventer (maybe)
Water Main (metal or plastic)
WATER UTILITY RESPONSIBILITY
Utility Service Line (metal or plastic)
Property Service Line (metal or plastic)
[sometimes other sources, i.e., wells]

Our March 2020 Study: Lessons Learned from the 2017 Tubbs Fire and 2018 Camp Fire

AWWA WATER SCIENCE

Wildfire caused widespread drinking water distribution network contamination

Download FREE here:
https://doi.org/10.1002/aws2.1183

VOCs and SVOCs present, levels can exceed hazardous waste limits (40,000 ppb benzene, etc.)

Do Not Use water order should be issued

Protect homeowners and their plumbing

Drinking Water Distribution System Impacts

500 ppb benzene – U.S. Federal RCRA hazardous waste limit

Chemical that Exceeded a Drinking Water Limit	2018 Camp Fire (8 months after the fire)				2017 Tubbs Fire (11 months after the fire)		
	PID	DOWC	Exceedance		Santa Rosa		
	Max, ppb	Max, ppb	Exceeded Long-Term Limit?	Exceeded ***Short-Term*** Limit?	Max, ppb	Exceeded Long-Term Limit?	Exceeded ***Short-Term*** Limit?
Benzene	>2,217	530	**Yes**	**Yes**	40,000	**Yes**	**Yes**
Methylene chloride	45	NA	**Yes**	No	41	**Yes**	No
Naphthalene	693	NA	**Yes**	**Yes**	6,800	**Yes**	**Yes**
Styrene	378	NA	**Yes**	No	460	**Yes**	No
Tert-butyl alcohol	13	NA	**Yes**	-	29	**Yes**	-
Toluene	676	NA	**Yes**	No	1,130	**Yes**	No
Vinyl chloride	1	NA	**Yes**	No	16	**Yes**	No

Long-term limit for an adult for 70 years
Short-term (1 day) limit for a 1 year old child

AWWA Water Science, Proctor et al. 2020
https://doi.org/10.1002/aws2.1183

Standing homes were scattered throughout the contaminated water systems: PID Example

2 sources
1 treatment plant

7 pressure zones
172 miles of buried pipe
- PVC (35%)
- Steel (33%)
- CML (19%)
- AC (10%)
- Irons (6%)

1,400 fire hydrants
10,600 service lines and meters
- Cu, Brass, GIP, GSP, HDPE, PB

PID Pressure Zones vs. Standing Structures

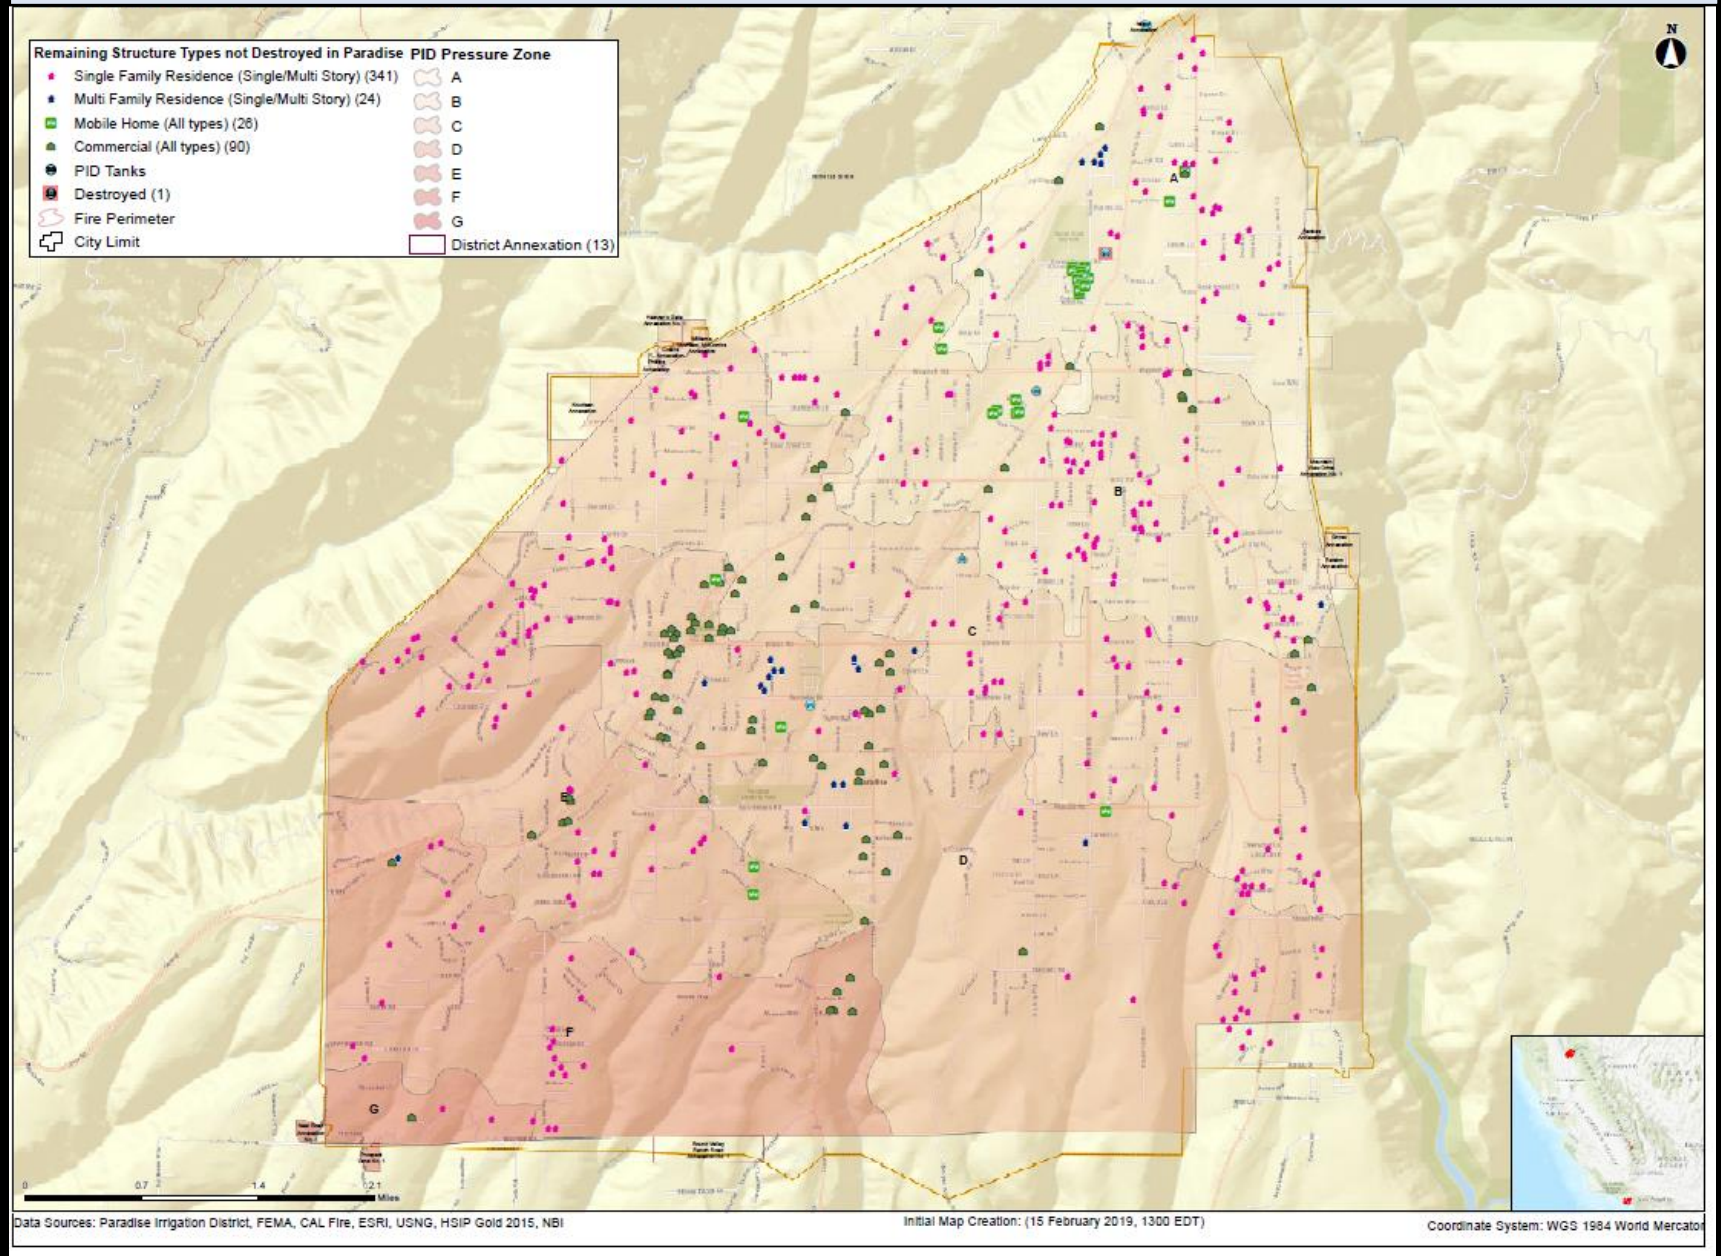

TOWN OF PARADISE
BUTTE COUNTY

March 19, 2019 Countywide warning

Butte County Health Officer Issues Water Quality Advisory for Residents in Burn Affected Areas

BUTTE COUNTY, CA. – The Butte County Health Offi
and urges people not to drink or boil tap water.

**Information from water authorities indicates th
residents should not rely on home water filtrati
contamination, residents should not use tap wa**

In addition, it is highly recommended that resident

- Limit use of hot water
- Limit shower time (use lukewarm water and ventilate area)
- Use a dishwasher to wash dishes and use air dry setting
- Wash clothing in cold water
- Do not take baths
- Do not use hot tubs or swimming pools

Residents who use water from private wells or temporary water storage tanks may v
that result from structural damage caused by the Camp Fire.

The Health Department does not have oversight over water authorities. If residents
authority directly.

Do Not Use

"…contamination may be present in home plumbing systems, and therefore, residents should not rely on home water filtrations systems as they may not be adequate to provide protection."

"…residents should not use tap water for drinking, cooking, food preparation, brushing teeth, or similar activities."

Possible Primary Sources

1. *In-situ* plastic thermal decomposition (PVC pipes, HDPE pipes, PB pipes, gaskets, meter components, etc.)
2. Contaminated air/materials drawn into depressurized system
3. Contaminated water from building plumbing drawn into compromised distribution system

Confirmed Secondary Sources

Partitioning/Adsorption/Absorption:
Water ←→ Material

See video at
www.PlumbingSafety.org

December 2020 Study: Thermally damaged plastic pipes can be a source of water contamination

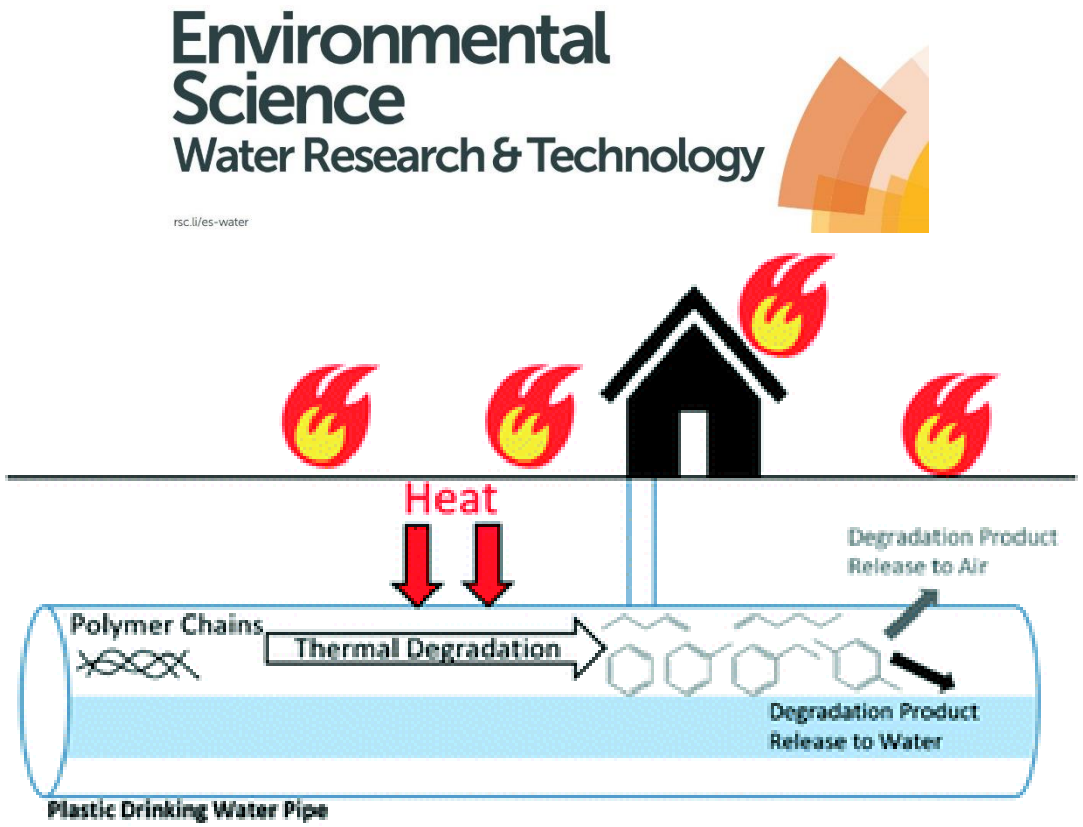

Drinking water contamination from the thermal degradation of plastics: implications for wildfire and structure fire response

Download FREE here:

https://doi.org/10.1039/D0EW00836B

Heating new HDPE, PEX, PVC, CPVC, and PP pipes < T_{deg} generated VOCs and SVOCs

Benzene was generated by all pipes except PP

Once plastic cooled, chemicals leached into water

Chemicals can sorb into and leach from water system materials including plumbing components

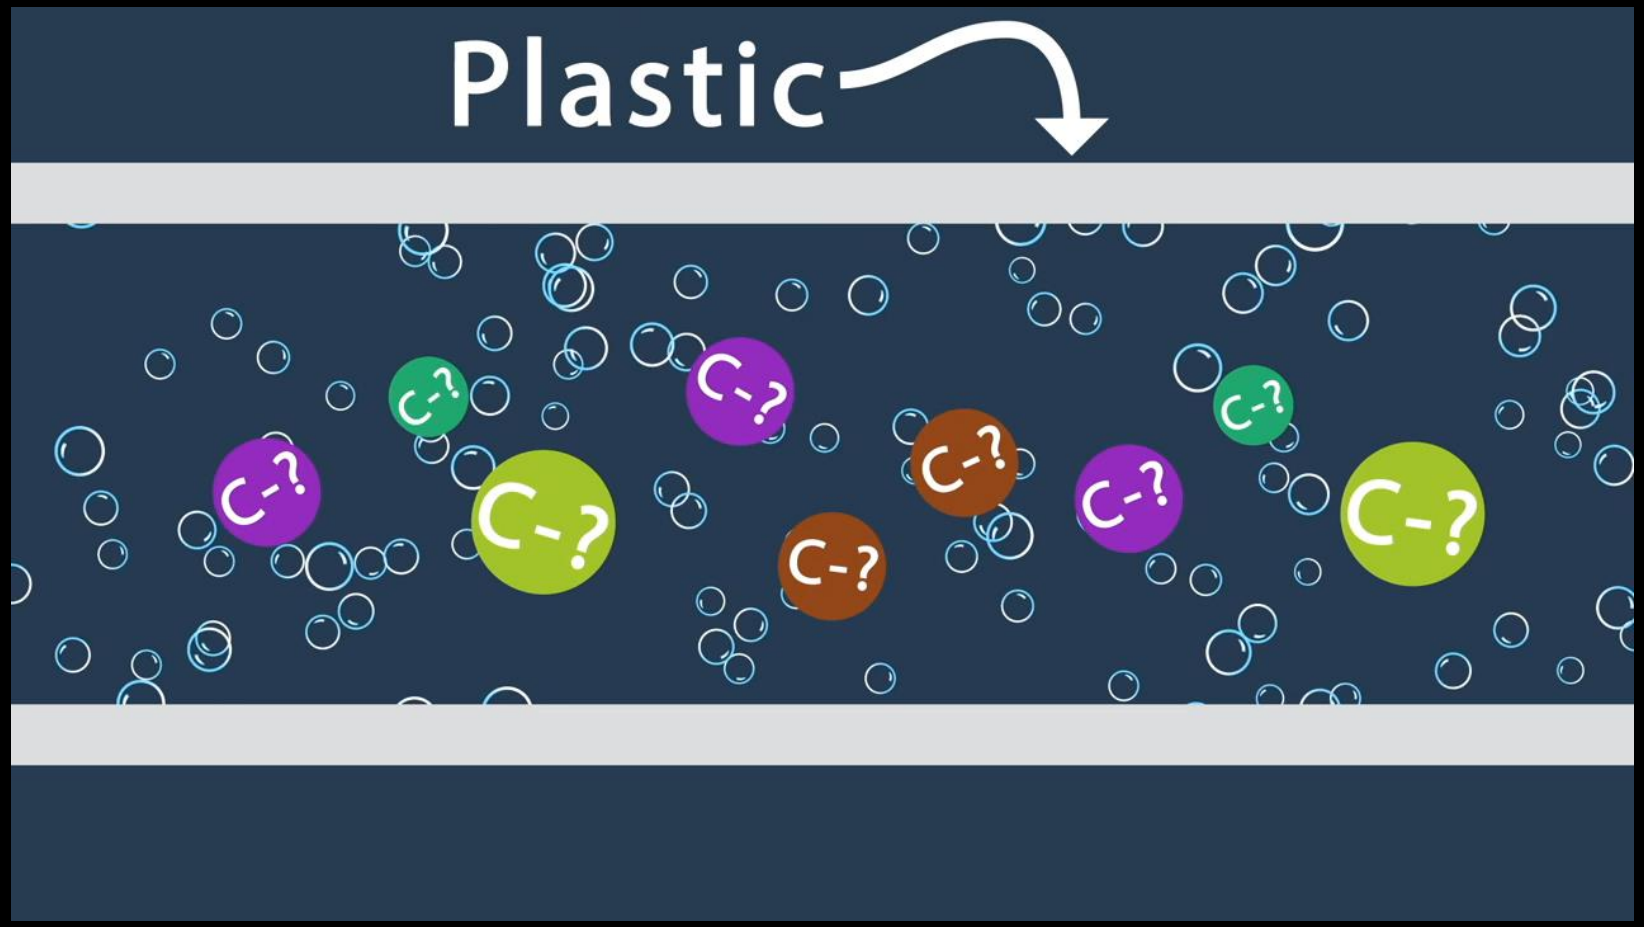

For water samples, ***Stagnation Time*** is needed

Before you collect a water sample you must allow the chemicals to leach out into water.

Watch the video at https://youtu.be/ythX2fP3-S4

How chemicals contaminate plastics and drinking water

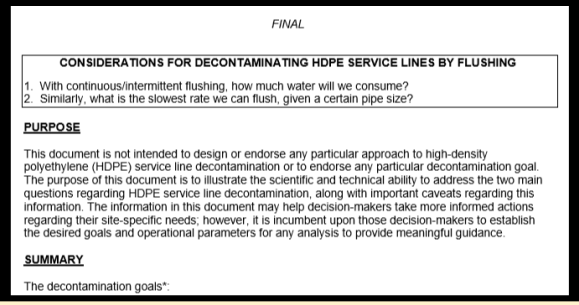

FINAL

CONSIDERATIONS FOR DECONTAMINATING HDPE SERVICE LINES BY FLUSHING

1. With continuous/intermittent flushing, how much water will we consume?
2. Similarly, what is the slowest rate we can flush, given a certain pipe size?

PURPOSE

This document is not intended to design or endorse any particular approach to high-density polyethylene (HDPE) service line decontamination or to endorse any particular decontamination goal. The purpose of this document is to illustrate the scientific and technical ability to address the two main questions regarding HDPE service line decontamination, along with important caveats regarding this information. The information in this document may help decision-makers take more informed actions regarding their site-specific needs; however, it is incumbent upon those decision-makers to establish the desired goals and operational parameters for any analysis to provide meaningful guidance.

SUMMARY

The decontamination goals*:

Science was applied to some water distribution system testing and decontamination decisions, but more work is needed

Water Distribution System Decontamination

Collaboration between Us & USEPA

Hydraulics

Polymer Science

Environmental Engineering

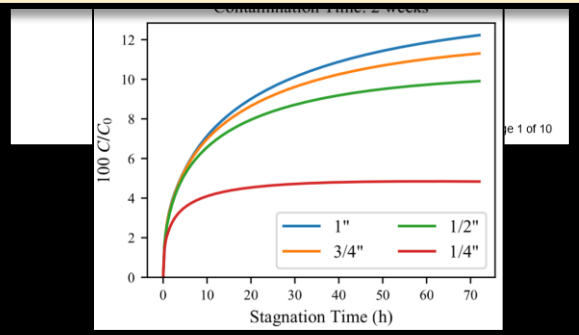

Numerical modeling:

Greater than 286 days vs. less than 64 days of continuous water flushing for 1-inch HDPE service line

(Haupert et al. 2019)

Initial measurement concentration (C_2)	Goal A (never above 0.5 ppb)		Goal B (only exceed 0.5 ppb after 72 hours of stagnation)	
	Continuous	Intermittent (once/72 hrs)	Continuous	Intermittent (once/72 hrs)
100 ppb	286	312	195	240
50 ppb	246	270	156	198
20 ppb	195	213	104	141
10 ppb	155	171	66	99
5 ppb	116	129	33	60
2 ppb	64	74	8	20

https://engineering.purdue.edu/PlumbingSafety/opinions/Final-HDPE-Service-Line-Decontamination-2019-03-18.pdf

Water safety attitudes, risk perception, experiences, and education for households impacted by the 2018 Camp Fire

Natural Hazards, Published May 2021 https://doi.org/10.1007/s11069-021-04714-9

Critical Public Health Issues

1) Water use restrictions,
2) **Plumbing** sampling and testing,
3) **Plumbing** decontamination methods and validation,
4) Water tank selection and maintenance,
5) In-home treatment device selection and maintenance, and
6) **Plumbing** design and material selection for property repairs and new construction.

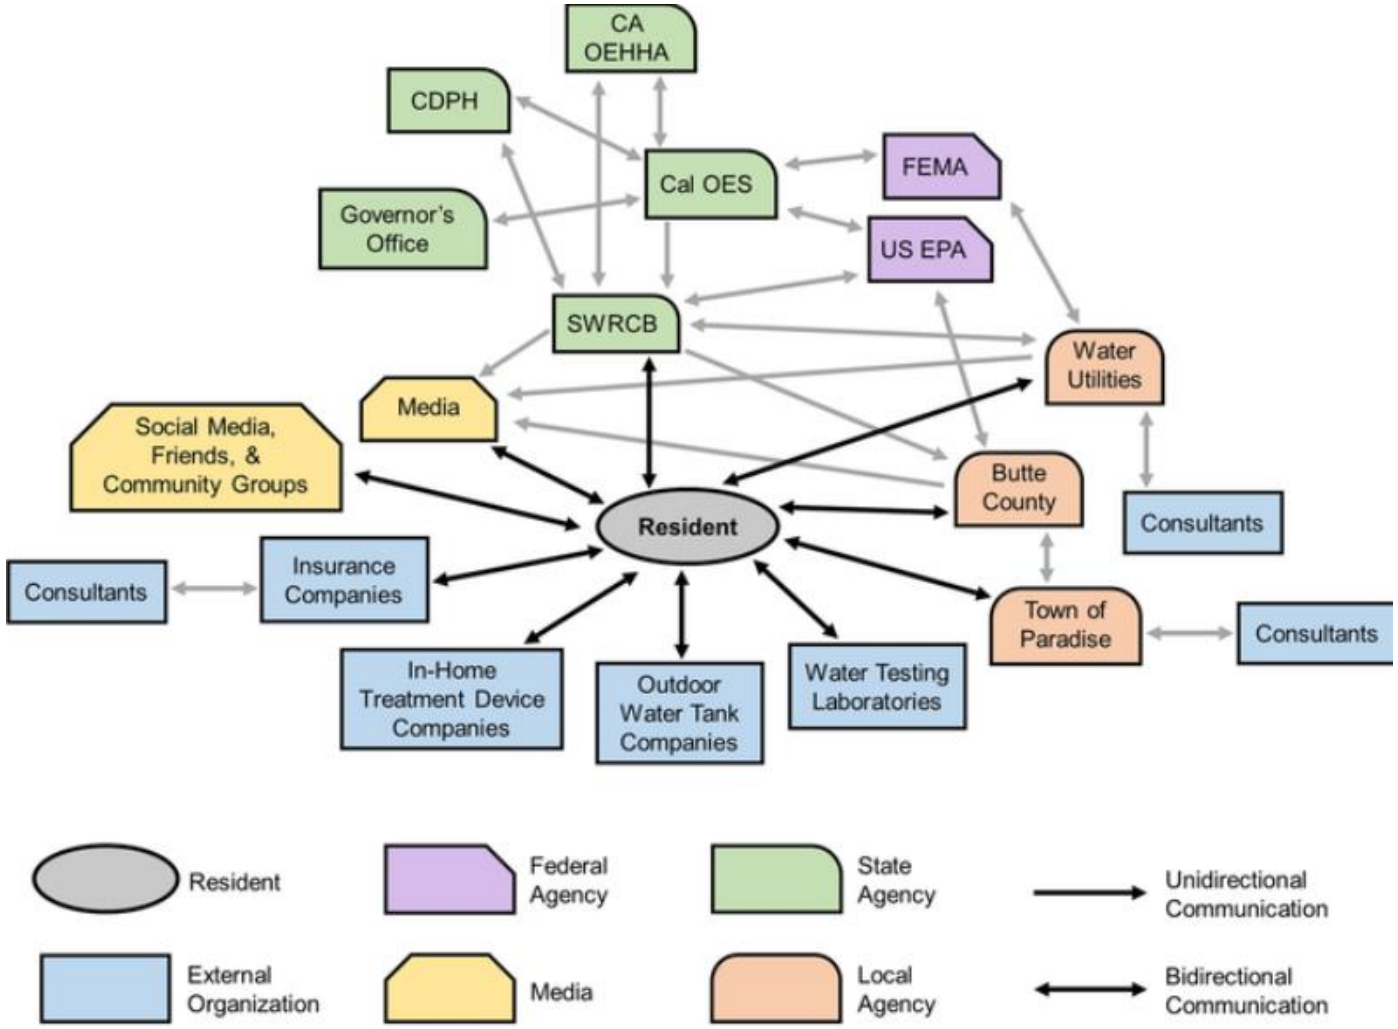

Q: Should in-home POU water filtration devices be used to treat wildfire contaminated drinking water?

Water Collected and Analyze	Preliminary Results, ppb			
	Benzene	Toluene	Ethyl Benzene	Xylene
Entering the filter	713	911	87	212
Exiting the filter				
1 L	20	15	3	4
1.5 L	33	30	5	9
2 L	47	46	6	11
3 L	64	75	10	21
3.5 L	62	75	10	20
4 L	24	22	4	5
4.5 L	87	98	11	21
5 L	37	37	5	8

The devices are NOT designed for this. The range of contamination must be known + testing.

In 2019, CA OEHHA concluded that short-term 26 ppb benzene exposure would prompt an increased risk of blood effects in children such as a decrease in lymphocytes and white blood cells; Benzene has a 5 ppb Federal MCL, 1 ppb CA MCL

Maximum Benzene Level	Event/Location	Population Affected	System Name	Year
6	Echo Mountain Fire/Oregon	120	Whispering Pines Mobile Home Park	2020
11	Echo Mountain Fire/Oregon	362	Hiland WC - Echo Mountain	2020
1	Echo Mountain Fire/Oregon	760	Panther Creek Water District	2020
76	Almeda Fire/Oregon	6,850	City of Talent	2020
45	Lionshead Fire/Oregon	205	Detroit Water System	2020
2	CZU Lightning Complex Fire/California	1,650	Big Basin Water Company	2020
42	CZU Lightning Complex Fire/California	21,145	San Lorenzo Water District	2020
2,217	Camp Fire/California	26,032	Paradise Irrigation District	2018
38	Camp Fire/California	924	Del Oro Water Co.-Magalia	2018
8	Camp Fire/California	1,106	Del Oro Water Co.-Lime Saddle	2018
530	Camp Fire/California	11,324	Del Oro Water Co.-Paradise Pines	2018
40,000	Tubbs Fire/California	175,000	City of Santa Rosa	2017

Prior to 2017 public water systems never tested.

September 2021

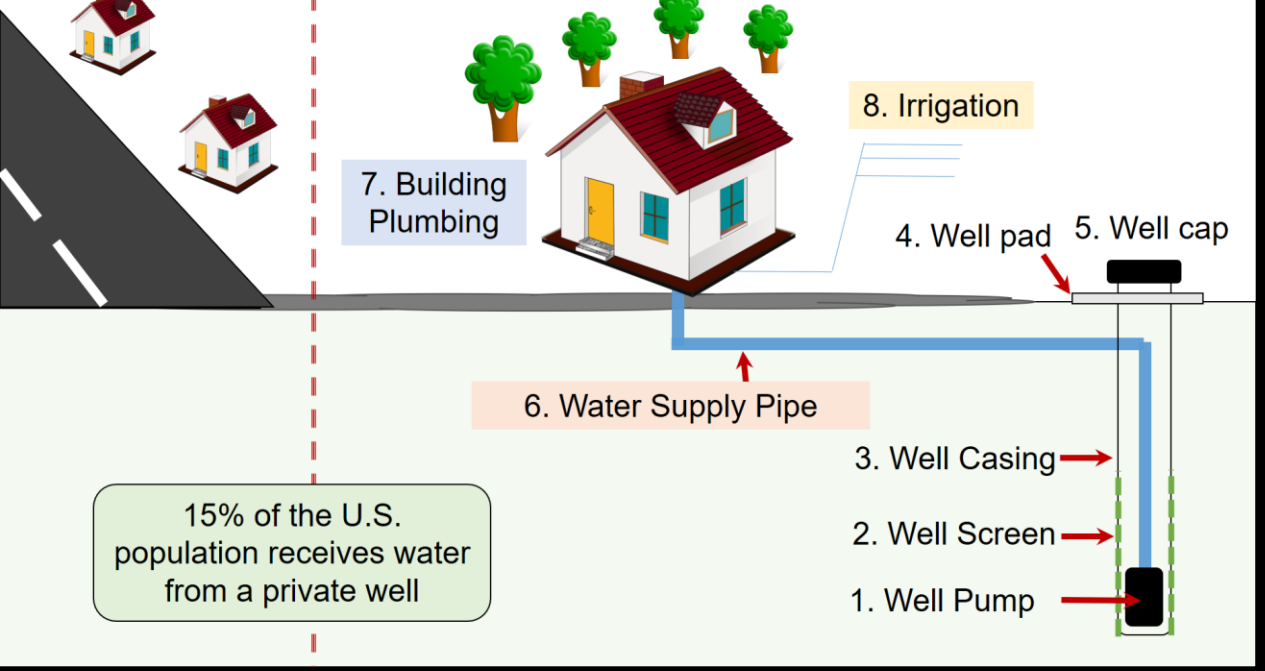

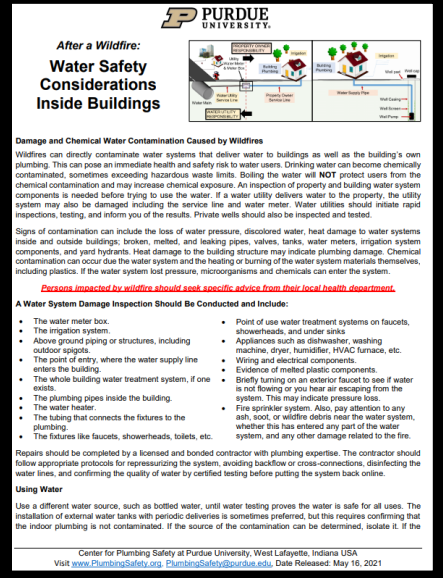

PURDUE UNIVERSITY

After a Wildfire:

Water Safety Considerations Inside Buildings

Damage and Chemical Water Contamination Caused by Wildfires

Wildfires can directly contaminate water systems that deliver water to buildings as well as the building's own plumbing. This can pose an immediate health and safety risk to water users. Drinking water can become chemically contaminated, sometimes exceeding hazardous waste limits. Boiling the water will **NOT** protect users from the chemical contamination and may increase chemical exposure. An inspection of property and building water system components is needed before trying to use the water. If a water utility delivers water to the property, the utility system may also be damaged including the service line and water meter. Water utilities should initiate rapid inspections, testing, and inform you of the results. Private wells should also be inspected and tested.

Signs of contamination can include the loss of water pressure, discolored water, heat damage to water systems inside and outside buildings; broken, melted, and leaking pipes, valves, tanks, water meters, irrigation system components, and yard hydrants. Heat damage to the building structure may indicate plumbing damage. Chemical contamination can occur due the water system and the heating or burning of the water system materials themselves, including plastics. If the water system lost pressure, microorganisms and chemicals can enter the system.

Persons impacted by wildfire should seek specific advice from their local health department.

A Water System Damage Inspection Should Be Conducted and Include:

- The water meter box.
- The irrigation system.
- Above ground piping or structures, including outdoor spigots.
- The point of entry, where the water supply line enters the building.
- The whole building water treatment system, if one exists.
- The plumbing pipes inside the building.
- The water heater.
- The tubing that connects the fixtures to the plumbing.
- The fixtures like faucets, showerheads, toilets, etc.
- Point of use water treatment systems on faucets, showerheads, and under sinks
- Appliances such as dishwasher, washing machine, dryer, humidifier, HVAC furnace, etc.
- Wiring and electrical components.
- Evidence of melted plastic components.
- Briefly turning on an exterior faucet to see if water is not flowing or you hear air escaping from the system. This may indicate pressure loss.
- Fire sprinkler system. Also, pay attention to any ash, soot, or wildfire debris near the water system, whether this has entered any part of the water system, and any other damage related to the fire.

Repairs should be completed by a licensed and bonded contractor with plumbing expertise. The contractor should follow appropriate protocols for repressurizing the system, avoiding backflow or cross-connections, disinfecting the water lines, and confirming the quality of water by certified testing before putting the system back online.

Using Water

Use a different water source, such as bottled water, until water testing proves the water is safe for all uses. The installation of external water tanks with periodic deliveries is sometimes preferred, but this requires confirming that the indoor plumbing is not contaminated. If the source of the contamination can be determined, isolate it. If the

Center for Plumbing Safety at Purdue University, West Lafayette, Indiana USA
Visit www.PlumbingSafety.org, PlumbingSafety@purdue.edu, Date Released: May 16, 2021

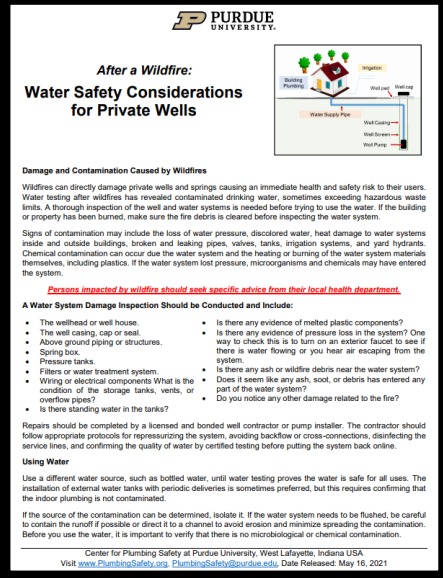

PURDUE UNIVERSITY

After a Wildfire:

Water Safety Considerations for Private Wells

Damage and Contamination Caused by Wildfires

Wildfires can directly damage private wells and springs causing an immediate health and safety risk to their users. Water testing after wildfires has revealed contaminated drinking water, sometimes exceeding hazardous waste limits. A thorough inspection of the well and water systems is needed before trying to use the water. If the building or property has been burned, make sure the fire debris is cleared before inspecting the water system.

Signs of contamination may include the loss of water pressure, discolored water, heat damage to water systems inside and outside buildings, broken and leaking pipes, valves, tanks, irrigation systems, and yard hydrants. Chemical contamination can occur due the water system and the heating or burning of the water system materials themselves, including plastics. If the water system lost pressure, microorganisms and chemicals may have entered the system.

Persons impacted by wildfire should seek specific advice from their local health department.

A Water System Damage Inspection Should be Conducted and Include:

- The wellhead or well house.
- The well casing, cap or seal.
- Above ground piping or structures.
- Spring box.
- Pressure tanks.
- Filters or water treatment system.
- Wiring or electrical components What is the condition of the storage tanks, vents, or overflow pipes?
- Is there standing water in the tanks?
- Is there any evidence of melted plastic components?
- Is there any evidence of pressure loss in the system? One way to check this is to turn on an exterior faucet to see if there is water flowing or you hear air escaping from the system.
- Is there any ash or wildfire debris near the water system?
- Does it seem like any ash, soot, or debris has entered any part of the water system?
- Do you notice any other damage related to the fire?

Repairs should be completed by a licensed and bonded well contractor or pump installer. The contractor should follow appropriate protocols for repressurizing the system, avoiding backflow or cross-connections, disinfecting the service lines, and confirming the quality of water by certified testing before putting the system back online.

Using Water

Use a different water source, such as bottled water, until water testing proves the water is safe for all uses. The installation of external water tanks with periodic deliveries is sometimes preferred, but this requires confirming that the indoor plumbing is not contaminated.

If the source of the contamination can be determined, isolate it. If the water system needs to be flushed, be careful to contain the runoff if possible or direct it to a channel to avoid erosion and minimize spreading the contamination. Before you use the water, it is important to verify that there is no microbiological or chemical contamination.

Center for Plumbing Safety at Purdue University, West Lafayette, Indiana USA
Visit www.PlumbingSafety.org, PlumbingSafety@purdue.edu, Date Released: May 16, 2021

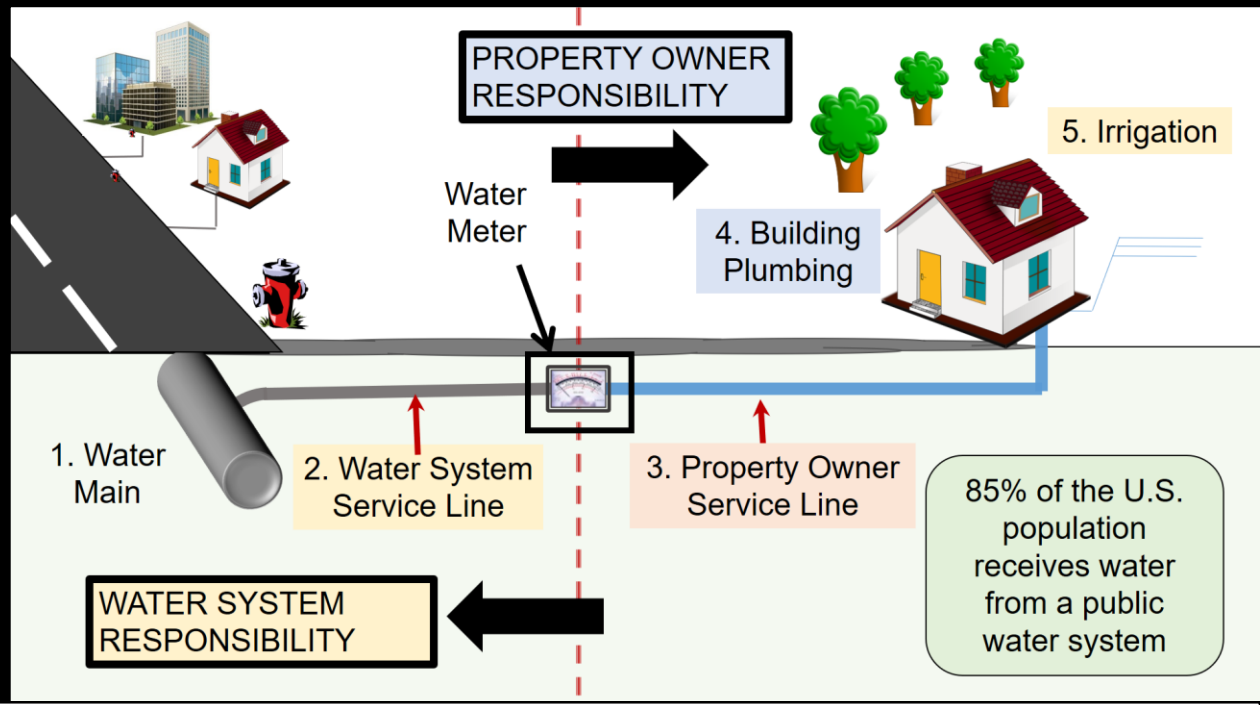

We created 2 page inspection and water testing guidance for private wells and building water systems

Released May 2021

Access here ➔ [Click]

PURDUE UNIVERSITY

FIRE WALL

September 2021

Assessing damage to private wells

After the Fire

This tool is meant for properties that were damaged by wildfire or had a wildfire within 100 feet of the property.

Use this resource to assess damage level and identify next steps

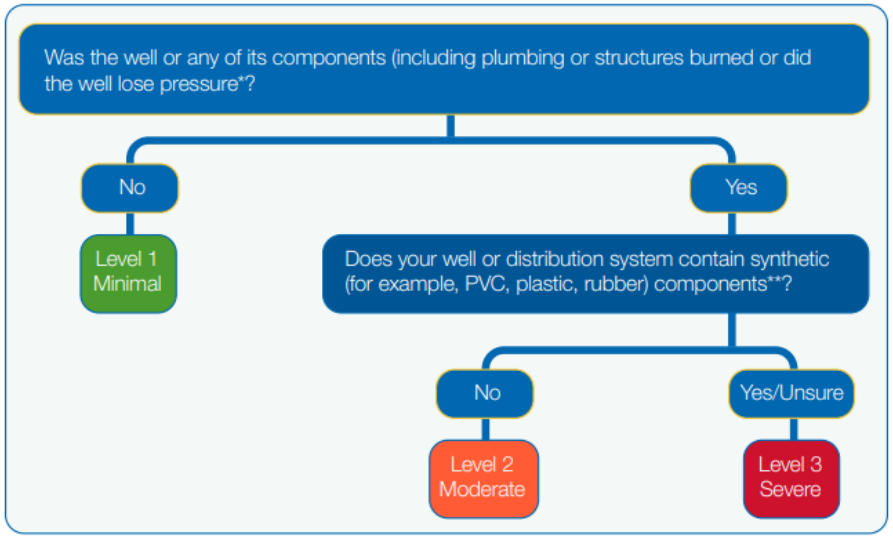

* Check to see if the well lost pressure by watching water flow from faucets. If the water flow is interrupted by air escaping, the well lost pressure.

** Check to see if the well system and plumbing have plastic or rubber components that contact drinking water. This may include electrical wiring and controls in contact with water, plastic/PVC casings and liners, rubber gaskets, treatment equipment, and more.

Oregon Health Authority
PUBLIC HEALTH DIVISION

Addressing Contamination of Drinking Water Distribution Systems from Volatile Organic Compounds (VOCs) After Wildfires

After the 2017 Tubbs Fire and the 2018 Camp Fire in California, volatile organic compounds (VOCs) were found in the drinking water of the impacted towns. Tests of the water revealed elevated levels of several VOCs, such as benzene, in water mains, service connections, and building fixtures. If unaddressed, VOC contamination can pose a potential health risk for consumers and result in a loss of consumer confidence.

Addressing VOC contamination can be a potentially long-term problem. Flushing is the primary method for removing VOC contamination; however, flushing may not always be effective or feasible. Infrastructure replacement is another option, but depending on the scale, can take time and be cost-prohibitive. Delays in addressing contamination can impact the return of residents to their homes and the restart of commercial businesses, significantly slowing community recovery. This factsheet examines VOC drinking water contamination from the Tubbs and Camp Fires and recommends practices to assist drinking water utilities in identifying and addressing contamination. While this information is intended for public water systems, it also may benefit private water systems and well owners.

The causes and remediation of VOC contamination in distribution systems is an emerging field of study. The cited research reflects the current understanding of wildfire impacts on drinking water distribution systems as well as the informational gaps. This document is meant to provide a resource for water utilities, communities, and state primacy agencies dealing with wildfire damage and public health concerns. Utilities should contact their state primacy agency or EPA Regional Office for additional technical assistance.

Wildfire VOC Contamination

VOC contamination may occur when water distribution infrastructure (e.g., pipes, valves, meters, etc.) is impacted by a wildfire. VOC contamination has been observed primarily in areas that were damaged during the wildfire and experienced pressure loss in the water system. Research into the exact cause of the VOC contamination is ongoing, but two possible explanations have been proposed that may account for such contamination either alone or in combination.

1. Contamination may be released into the water from infrastructure containing polyvinyl chloride (PVC), high density polyethylene (HDPE), or other plastic materials that degrade when exposed to heat.[1]

For more information, please visit **www.epa.gov/waterutilityresponse** 1

NEW: Building Water Essentials – Open 10 Hour, Online Short-Course





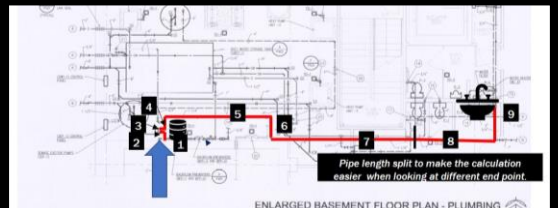

Input from practicing engineers, scientists, utilities and public health officials.

A training tool, an encyclopedia, and an extensive FAQ, designed to be immediately applicable in the field.

Modules do not have to be taken in sequence.




If interested e-mail awhelton@purdue.edu

Info and registration: https://cutt.ly/Sg4RXJv

Thank you.

Andrew Whelton, Ph.D. awhelton@purdue.edu @TheWheltonGroup

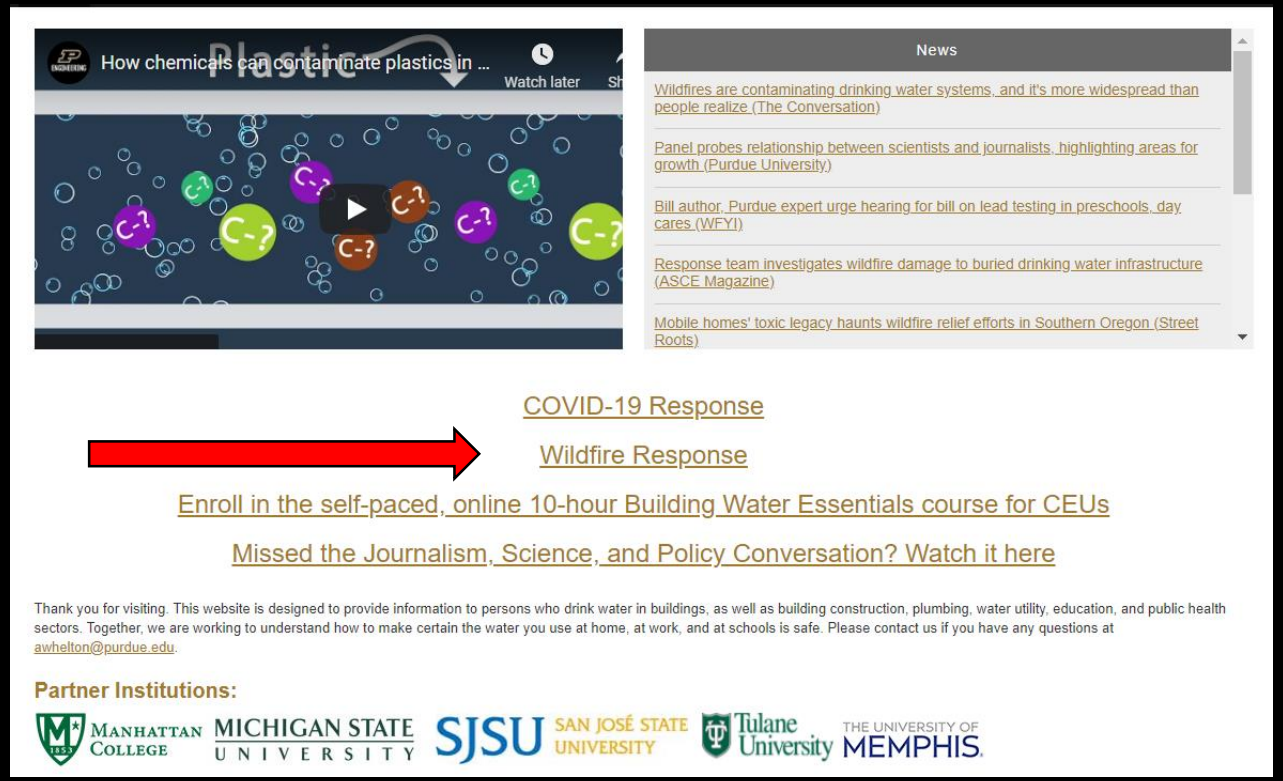

- ✓ Online short-course
- ✓ Plumbing education videos
- ✓ Flushing plans
- ✓ Plumbing explainers
- ✓ List of projects
- ✓ Scientific opinions
- ✓ Resources ➔ presentations
- ✓ Scientific reports
- ✓ External plumbing docs
- ✓ YouTube Channel

10 hr, 1 CEU, Self-paced, Online Building Water Essentials Short-Course:
https://engineering.purdue.edu/online/certifications/building-water-essentials

www.PlumbingSafety.org