


Lithium Batteries

EAGLE PITCHER KEEPER II LITHIUM NON RECHARGEABLE

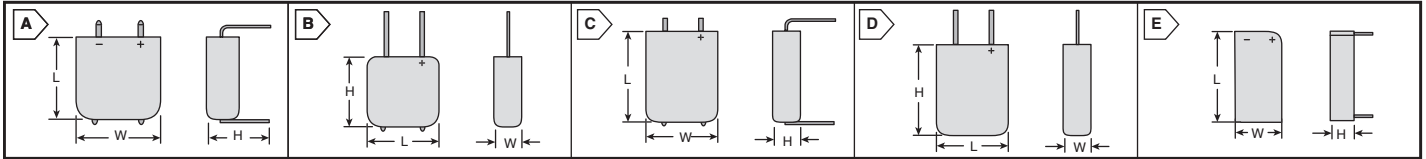

For quantities of 100 and up, call for quote.

Features:

- Low profile prismatic design
- Wave solderability up to 5 seconds
- Higher cell voltage allows for fewer cell and high reliability
- No charging circuits required
- Flat discharge characteristics



MOUSER STOCK NO.	Eagle-Picher Part No.	Fig.	Description	Voltage	Capacity mAh	Dimensions: in.			Price Each		
						L	W	H	1	10	50
521-3PN	LTC-3PN	A	W/4 Leads Stainless Steel	3.5V	350	0.60	0.65	0.27			
521-3PNS2	LTC-3PNS2	B	W/2 Leads Stainless Steel	3.5V	350	0.65	0.27	0.60			
521-7PN	LTC-7PN	C	W/4 Leads Stainless Steel	3.5V	750	1.00	0.65	0.26			
521-7PNS4	LTC-7PNS4	D	W/2 Leads Stainless Steel	3.5V	750	0.65	0.26	1.00			
521-7P	LTC-7P	E	W/4 Leads, Black Pylton	3.5V	750	1.20	0.70	0.35			

ULTRALIFE THIN CELL™ LITHIUM 3-VOLT BATTERIES

Ultralife Thin Cell lithium batteries are waferthin - as thin as 0.078 inch - providing a unique combination of high energy, long shelf life, wide operating temperature range, and light weight. With their ultra-thin prismatic form and a high ratio of active materials to packaging, Thin Cell batteries can efficiently fill virtually any battery cavity.

Features:

- Lithium-manganese dioxide chemistry
- Light weight
- Contains no mercury, cadmium, lead, or other toxic metals




For quantities of 48 and up, call for quote.

MOUSER STOCK NO.	Dimensions: in.			Max. Discharge	Weight (g)	Price Each		
	L	W	H			1	12	24
5169-U10004	1.75	0.20	2.15	250 mA	15			
5169-U3VF-L-T	1.18	0.08	1.52	25 mA	3.5			

ULTRALIFE LITHIUM 9-VOLT BATTERIES

- Long shelf life - up to 10 years
- Environmentally responsible - contains no mercury, cadmium, or lead
- Ideal for medical equipment, instrumentation, security/alarm systems
- Rating: 1200 mAh
- Temperature range: -40°C to +60°C

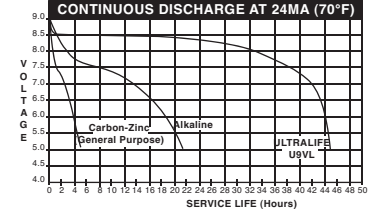


† Aluminum housing
*Packaged in lithium foil package

For quantities of 48 and up, call for quote.

MOUSER STOCK NO.	Dimensions: in.			Max. Discharge	Weight (g)	Price Each		
	L	W	H			1	12	24
*5169-U9VL-FP	1.02	0.67	1.92	120 mA	33.8			
† 5169-U9VL-J	1.04	0.69	1.93	120 mA	36.4			

ULTRALIFE RECHARGEABLE LITHIUM 3.7-VOLT BATTERIES

Ultralife lithium-ion prismatic (rectangular) cells offer high energy density, high capacity, and long life in the most common, lightweight sizes. These cells, which operate over a wide temperature range, are ideal for many portable devices.




For quantities of 48 and up, call for quote.

MOUSER STOCK NO.	Dimensions: in.			Energy	Weight (g)	Price Each		
	L	W	H			1	12	24
5169-UBBP01	2.83	2.09	0.23	6.8 Wh	45.0			
5169-UBP001	2.13	1.42	0.43	6.7 Wh	41.0			
5169-UBP563450	2.13	1.42	0.24	3.4 Wh	24.0			
5169-UBP543048	2.05	1.26	0.22	2.8 Wh	16.5			

VARTA EASYPACK LITHIUM POLYMER BATTERIES

Specifications:

- Two possible positions: large surface or 90° vertical positioning
- Mating application contacts
- Charging system
- Light, thin and powerful cell
- Gold plated battery contacts
- Proper fixation




For quantities of 50 and up, call for quote.

MOUSER STOCK NO.	Varta Part No.	Voltage	Capacity mAh	Dimensions: mm			Weight (g)	Price Each		
				L	W	H		1	10	25
672-66590-711-099	66590711099	3.7	550	43.5	35.4	5.8	14.0			
672-66352-711-099	66352711099	3.7	750	64.5	36.6	5.2	20.0			
672-66380-711-099	66380711099	3.7	1000	64.5	36.6	6.4	25.0			
672-66380-712-099	66380712099	3.7	2000	64.5	36.6	11.4	46.5			

VARTA EASYPACK EVALUATION KIT

Specifications:


- Linear controller- no interference to the application
- Charges all Varta EasyPacks
- Input 5V, 1A (Input cord included)
- Charging Current 500mA/1000mA
- Easy access to IC test pins and battery contacts
- Additional breadboard space to mount individual components
- Modular contact: 652-70AAJ-4-M0
- Kit Includes: Evaluation Kit- input cord, charger, and 550, 750, 1000, 2000 mAh batteries



For quantities of 2 and up, call for quote.

MOUSER STOCK NO.	Varta Part No.	Price Each
672-68021-096-279	68021096279	

SAFT LITHIUM 3.67 VOLT BATTERIES

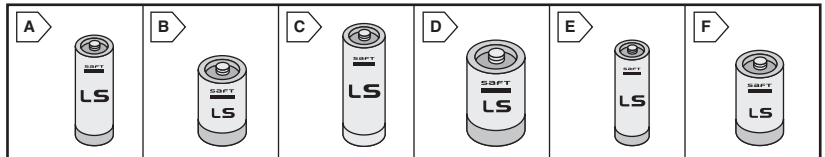

For quantities of 100 and up, call for quote.

MOUSER STOCK NO.	Fig.	Size	Termination	Capacity (Ah)	Dimensions: mm		Price Each		
					Dia.	Height	1	10	50
639-LS14500BA	A	AA	Button	2.45	14.6	50.3			
639-LS14500ST	A	AA	Solder Tab	2.45	14.6	50.3			
639-LS14500AX	A	AA	Axial Leads	2.45	14.6	50.3			
639-LS14250BA	B	1/2 AA	Button	1.1	14.6	24.8			
639-LS14250ST	B	1/2 AA	Solder Tab	1.1	14.6	24.8			
639-LS14250AX	B	1/2 AA	Axial Leads	1.1	14.6	24.8			
639-LS14500CBA	C	AA	Button	2.7	14.6	50.3			
639-LS14500CST	C	AA	Solder Tab	2.7	14.6	50.3			
639-LS14250CST	D	1/2 AA	Solder Tab	1.2	14.6	24.8			
639-LS14250CBA	D	1/2 AA	Button	1.2	14.6	24.8			
639-LS17500BA	E	A	Button	3.6	17.0	50.9			
639-LST17330BA	F	2/3 A	Button	2.1	16.5	33.4			
639-LST17330ST	F	2/3 A	Solder Tab	2.1	16.5	33.4			