

Accommodation of Partial Actuator Faults using Output Feedback based Adaptive Robust Control

Shreekant Gayaka and Bin Yao

Abstract—This work considers the problem of partial actuator fault accommodation. The faulty actuators are characterized by a loss in efficiency, which can potentially lead to system instability or degraded system performance. Conventional model reference adaptive control has been used to solve this problem in the literature, which provides a natural setting to solve such problems by virtue of its online learning capabilities. Unfortunately, such techniques can lead to unbounded states when output disturbances and other modeling uncertainties are considered. In the present work, we make the problem more practical by explicitly taking into account these factors. Furthermore, we assume that faults occur at unknown instants of time and only limited state information is available. For solving this problem, we develop an output feedback adaptive robust control (ARC) based technique, which can effectively deal with all the constraints and uncertainties present in the system. The technique combines the output feedback based adaptive backstepping with robust control techniques and uses discontinuous projection to ensure the unknown parameter estimates stay within a known convex set. Comparative simulation studies are performed on a linearized Boeing 747 model to evaluate performance of the proposed scheme versus conventional MRAC based technique.

Index terms - Adaptive control, Actuator faults, Fault-tolerant control, Robust control, Uncertain systems

I. INTRODUCTION

For many safety critical missions like flight control systems, it is desirable to have a certain degree of fault tolerance with respect to various faults. In this work, we focus on the problem of fault accommodation for partial actuator failures in a linear controlled system with unknown parameters and subjected to bounded disturbances. The faults are modeled as actuators losing effectiveness at unknown instants of time. Furthermore, we do not assume the knowledge of failed actuators, as fault isolation for systems with redundant actuators is a fairly difficult problem and involves design of observers and analyzing the observability of various signals. Fortunately, adaptive schemes, by virtue of its on-line learning capability can bypass this problem. Consequently, many adaptive schemes have been developed to solve this problem.

In [3], adaptive algorithms were proposed for reconfiguring the flight control system in presence of loss of actuator efficiency. Similar approaches based on conventional model reference adaptive control (MRAC) can also be found in [8] for solving the problem of control reconfiguration in case of stuck actuators. The inherent limitation of these approaches is that they rely on conventional MRAC, which suffers from poor transients during the learning phase and offers difficulty in checking stability and robustness bounds in presence of exogenous disturbances. Robust schemes for actuator fault accommodation, which can handle such disturbances and

unstructured uncertainties with guaranteed transient performance, include LMI based techniques [7] and sliding mode control based approaches [1]. But, in presence of large parametric uncertainties, the robust control laws can result in very high gain controllers and may not guarantee good final tracking accuracy. One approach which potentially alleviates these problems is multiple model adaptive control (MMAC), switching and tuning [4]. It is worth noting that in multiple model based approaches, the problem of covering the state-space with a finite set of nominal models is not a trivial one, especially in presence of unstructured uncertainties. Furthermore, as pointed out in [2], MMAC based techniques are not intrinsically stable and a safe switching rule needs to be designed.

Given the need for stability in safety critical missions, the large parametric uncertainties introduced due to unknown actuator failures and the inherent limitations of conventional adaptive control, the idea of *safe adaptive control* is coming to forefront, which ensures certain stability properties like bounded system states even without adaptation [14], [2]. In this respect, we would like to point out that ARC based schemes have already resolved this issue [11], [9] and may be classified as the so-called safe adaptive control. Switching the adaptation off at any instant converts the adaptive robust controller into a deterministic robust controller with guaranteed transient performance. Moreover, the design procedure allows us to calculate explicit upper bound for tracking errors over the entire time history in terms of certain controller parameters and achieve prespecified final tracking accuracy. Thus, ARC based schemes are natural choices for safety sensitive systems over conventional adaptive and robust schemes.

In the present work, we develop an output feedback ARC based scheme for accommodation of unknown actuator faults. The technique used here [13] is a combination of adaptive backstepping [6] and discontinuous projection based ARC proposed in [9].

The paper is organized as follows. The next section presents the problem formulation. In the third section, we describe the output feedback based ARC approach to unknown actuator fault accommodation. In the fourth section, we present simulation results to demonstrate the superior performance achievable using the proposed scheme and finally, we conclude the paper by summarizing the main contributions.

II. PROBLEM STATEMENT

In the present work, we consider systems which can be represented in the input-output form as follows,

$$y(t) = \sum_{j=1}^k \frac{B_j(s)}{A(s)} u_j(t) + \frac{D(s)}{A(s)} \Delta(y, t) + d_y(t) \quad (1)$$

where, $A(s) = s^n + a_{n-1}s^{n-1} + \dots + a_1s + a_0$, $B_j(s) = b_{mj}s^m + \dots + b_{1j}s + b_{0j}$ and $D(s) = d_ls^l + \dots + d_1s + d_0$, and $m \leq l \leq n$. The plant parameters a_i and b_{ij} are unknown constants. The coefficients d_i corresponding to the disturbance distribution are assumed to be known but, the results can be readily extended to the case where they are unknown constants. $d_y(t)$ represents the output disturbance, and $\Delta(y, t)$ represents any disturbance coming from the intermediate channels of the plant. An implicit assumption in the system representation (1) is,

A1: The relative degree $\rho = n - m$ is known and same for any input u_j .

In this work, we will consider actuator failures which can be modeled as,

$$\begin{aligned} u_j^{F_p}(t) &= \mu_j^p u_j^*(t), \quad t \geq T_p, \quad j \in \{1, 2, \dots, k\} \quad \text{and} \\ \mu_j^p &\in [\epsilon_j, 1], \quad \epsilon_j \geq 0 \end{aligned} \quad (2)$$

where, $u_j^{F_p}(t)$ represents the control signal from the failed actuator, T_p is the unknown instant of p^{th} failure mode, by failure mode we mean the system configuration after the p^{th} time one or more actuators fail, μ_j^p is the controller effectiveness of the j^{th} actuator after the p^{th} failure pattern and ϵ_j , $\{j = 1, \dots, k\}$ are known lower bounds for controller effectiveness. Without actuator redundancy, actuator faults cannot be accommodated and this is formally stated in the following assumption,

A2: System (1) can fulfill the desired control objective with up to k failed actuators i.e., $\mu_1^p = \epsilon_1, \dots, \mu_k^p = \epsilon_k$ when implemented with unknown parameters.

It can be shown that for systems experiencing jump in parameter values, if the frequency of jumping is high, the transients resulting from the parameter jump can lead to system instability. In order to remove this potential problem, we will make the following practical assumption,

A3: The total number of failure modes are finite and upper bounded by a constant $\bar{P}$.

In presence of actuator failures, the input vector can be represented as,

$$u^{F_p}(t) = \bar{\mu}^p u^*(t) \quad (3)$$

where $u^*(t)$ is the control input to be designed and,

$$\bar{\mu}^p = \begin{bmatrix} \mu_1^p & 0 & \dots & 0 \\ 0 & \mu_2^p & \dots & 0 \\ \vdots & \ddots & \ddots & \vdots \\ 0 & \dots & 0 & \mu_k^p \end{bmatrix} \quad (4)$$

Now, the problem we attempt to solve in this work can be stated precisely as follows. For the system described by (1),

subjected to unknown actuator failures (2-4) and bounded disturbances, the goal is to design an output feedback control law such that the output tracking error converges exponentially to a prespecified bound and has a guaranteed transient performance.

In addition to actuator fault compensation, it is also desirable that the closed-loop system possess good disturbance rejection properties. In the present approach, such properties are achieved by explicitly taking into account $\Delta(y, t)$: we use prior information about the nature of disturbance to construct a nominal disturbance model $\Delta_n(y, t) = q(y, t)^T c$, where $q(y, t) = [q_p(y, t), \dots, q_1(y, t)]^T \in \mathbb{R}^p$ represents the vector of known basis shape functions and $c = [c_p, \dots, c_1]^T$ represents the vector of unknown magnitudes. Thus, the disturbance can be represented as, $\Delta = \Delta_n + \tilde{\Delta}$, where $\tilde{\Delta}$ is the modeling error. Adaptation will be used to compensate for the effect of Δ_n on the output tracking performance and $\tilde{\Delta}$ will be dealt with via certain robust feedback based on sliding mode control technique for robust performance.

III. OUTPUT FEEDBACK BASED ARC

A. Observer Canonical Form

In the present work, we will assume that control signals to all the actuators are same, i.e., $u_1^*(t) = \dots = u_k^*(t) = u^*(t)$. With this choice of control input, the system with failed actuators can be represented as,

$$y(t) = \sum_{j=1}^k \frac{B_j(s)}{A(s)} u_j^{F_p}(t) + \frac{D(s)}{A(s)} \Delta(y, t) + d_y(t) \quad (5)$$

$$\begin{aligned} &= \frac{b_m^p s^m + \dots + b_1^p s + b_0^p}{s^n + a_{n-1}s^{n-1} + \dots + a_1s + a_0} u^*(t) + d_y(t) \\ &\quad + \frac{d_ls^l + \dots + d_1s + d_0}{s^n + a_{n-1}s^{n-1} + \dots + a_1s + a_0} \Delta(y, t) \end{aligned} \quad (6)$$

where

$$\begin{aligned} b_m^p &= \mu_1^p b_{m1} + \mu_2^p b_{m2} + \dots + \mu_k^p b_{mk} \\ &\vdots \\ b_0^p &= \mu_1^p b_{01} + \mu_2^p b_{02} + \dots + \mu_k^p b_{0k} \end{aligned} \quad (7)$$

The following assumption will be made which is standard in adaptive control,

A4: The polynomial $\sum_{j=1}^k B_j(s)$ is Hurwitz and the sign of the high frequency gain ($\text{sign}(b_m^p)$) is known, irrespective of which actuators lose effectiveness.

An observer canonical realization of the above input-

output model is as follows,

$$\begin{aligned}
\dot{x}_1 &= x_2 - a_{n-1}x_1 \\
&\vdots \\
\dot{x}_{n-l-1} &= x_{n-l} - a_{l+1}x_1 \\
\dot{x}_{n-l} &= x_{n-l+1} - a_lx_1 + d_lq^T(y, t)c + d_l\tilde{\Delta} \\
&\vdots \\
\dot{x}_{\rho-1} &= x_\rho - a_{m+1}x_1 + d_{m+1}q^T(y, t)c + d_{m+1}\tilde{\Delta} \\
\dot{x}_\rho &= x_{\rho+1} - a_mx_1 + b_m^p u^*(t) + d_mq^T(y, t)c + d_m\tilde{\Delta} \\
&\vdots \\
\dot{x}_n &= -a_0x_1 + b_0^p u^*(t) + d_0q^T(y, t)c + d_0\tilde{\Delta} \\
y &= x_1 + d_y(t)
\end{aligned} \tag{8}$$

In addition to the assumptions made previously, we will make the following realistic assumptions for controller design,

A5: The extent of parametric uncertainties, disturbance modeling error $\tilde{\Delta}(t)$, output disturbance $d_y(t)$ as well as derivative $\dot{d}_y(t)$ satisfy,

$$\begin{aligned}
\theta &\in \Omega_\theta \triangleq \{\theta : \theta_{min} < \theta < \theta_{max}\} \\
\tilde{\Delta} &\in \Omega_\Delta \triangleq \{\tilde{\Delta} : |\tilde{\Delta}(y, t)| \leq \delta(t)\} \\
d_y &\in \Omega_d \triangleq \{d_y : |d_y(t)| \leq \delta_d(t)\} \\
\dot{d}_y &\in \Omega_f \triangleq \{\dot{d}_y : |\dot{d}_y(t)| \leq \delta_f(t)\}
\end{aligned} \tag{9}$$

where

$$\theta = [-a_{n-1}, \dots, -a_0, b_m^p, \dots, b_0^p, c_p, \dots, c_1]^T \in \mathbb{R}^{m+n+p+1}$$

B. State Estimation

In this section, we will describe the design of K-filters [6] for state estimation.

$$\dot{x} = A_0x + (\bar{k} - a)x_1 + dq^T(y, t)c + bu^* + d\tilde{\Delta} \tag{10}$$

where,

$$\begin{aligned}
A_0 &= \begin{bmatrix} -k_1 & & & \\ \vdots & I_{n-1} & & \\ -k_n & 0 \dots & 0 & \end{bmatrix} \quad \bar{k} = \begin{bmatrix} k_1 \\ \vdots \\ k_n \end{bmatrix} \\
a &= \begin{bmatrix} a_{n-1} \\ \vdots \\ a_0 \end{bmatrix} \quad b = \begin{bmatrix} 0_{(\rho-1) \times 1} \\ \bar{b}^p \end{bmatrix} \quad \bar{b}^p = \begin{bmatrix} b_m^p \\ \vdots \\ b_0^p \end{bmatrix} \\
d &= \begin{bmatrix} 0_{(n-l-1) \times 1} \\ \bar{d} \end{bmatrix} \quad \bar{d} = \begin{bmatrix} d_l \\ \vdots \\ d_0 \end{bmatrix}
\end{aligned} \tag{11}$$

The observer matrix A_0 can be made stable by a suitable choice of $\bar{k}$. Thus, there exists a symmetric positive definite matrix P such that,

$$PA_0 + A_0^T P = -I, \quad P = P^T > 0 \tag{12}$$

For the purpose of state-estimation, the following set of K-filters is defined,

$$\begin{aligned}
\dot{\xi}_n &= A_0\xi_n + \bar{k}y \\
\dot{\xi}_i &= A_0\xi_i + e_{n-i}y \quad 0 \leq i \leq n-1 \\
\dot{v}_i &= A_0v_i + e_{n-i}u^* \quad 0 \leq i \leq m \\
\dot{\psi}_i &= A_0\psi_i + dq_i(y, t) \quad 1 \leq i \leq p
\end{aligned} \tag{13}$$

where e_i denotes the i th standard basis vector in $\mathbb{R}^n$.

Remark 1: The ψ_i filter states are introduced for estimating the unknown parameters c_i in the disturbance function $\Delta(y, t)$ and these estimated parameters are used to explicitly compensate for the disturbance. This results in improved disturbance rejection properties for the controller and also leads to better state-estimates as the modeling error is reduced.

Note that, due to the special structure of A_0 , the order of the K-filters described above can be reduced by using the following two filters and certain algebraic expressions,

$$\begin{aligned}
\dot{\eta} &= A_0\eta + e_ny \\
\dot{\lambda} &= A_0\lambda + e_nu^*
\end{aligned} \tag{14}$$

Now, the ξ_i and v_i filter states can be obtained using the following expression,

$$\begin{aligned}
\xi_n &= -A_0^n \eta \\
\xi_i &= A_0^i \eta \quad 0 \leq i \leq n-1 \\
v_i &= A_0^i \lambda \quad 0 \leq i \leq m
\end{aligned} \tag{15}$$

Using the above filters, the state estimates are given by,

$$\hat{x} = \xi_n - \sum_{i=0}^{n-1} a_i \xi_i + \sum_{i=0}^m b_i v_i + \sum_{i=1}^p c_i \psi_i \tag{16}$$

Let $\varepsilon_x = x - \hat{x}$ be the estimation error. Then, using (10), (16) and the filters described above, the estimation error dynamics is given by,

$$\dot{\varepsilon}_x = A_0\varepsilon_x + (a - \bar{k})d_y + d\tilde{\Delta} \tag{17}$$

The estimation error can be written as,

$$\varepsilon_x = \varepsilon + \varepsilon_u \tag{18}$$

where ε is the zero input response satisfying $\dot{\varepsilon} = A_0\varepsilon$ and

$$\varepsilon_u = \int_0^t e^{A_0(t-\tau)} [(a - \bar{k})d_y(\tau) + d\tilde{\Delta}(y, \tau)] d\tau \tag{19}$$

is the zero state response. Now, from assumption 2 and the fact A_0 is stable, it is easy to see that,

$$\varepsilon_u \in \Omega_\varepsilon \triangleq \{\varepsilon_u : |\varepsilon_u| \leq \delta_\varepsilon(t)\} \tag{20}$$

where $\delta_\varepsilon(t)$ is a vector of unknown but bounded functions. In the present approach, ε and ε_u will be treated as disturbances and robust control functions will be used to achieve guaranteed robust performance.

C. Parameter Projection

Let $\hat{\theta}$ denote the estimate of θ and $\tilde{\theta} = \hat{\theta} - \theta$ denote the estimation error. It is well known fact that gradient based parameter estimation algorithms suffer from *parameter drift* in presence of disturbances, and can result in system states growing unboundedly. We use discontinuous parameter projection to deal with this problem. The update law and the projection mapping used here have the following form,

$$\dot{\hat{\theta}} = \text{Proj}_{\hat{\theta}}(\Gamma\tau) \quad (21)$$

$$\text{Proj}_{\hat{\theta}_i} = \begin{cases} 0 & \text{if } \hat{\theta}_i = \theta_{i,\max} \text{ and } \bullet_i > 0 \\ 0 & \text{if } \hat{\theta}_i = \theta_{i,\min} \text{ and } \bullet_i < 0 \\ \bullet_i & \text{otherwise} \end{cases} \quad (22)$$

where $\Gamma > 0$ is a diagonal matrix, and τ is any adaptation function. The projection mapping guarantees that the following two properties are always satisfied,

$$\mathbf{P1} \quad \hat{\theta} \in \Omega_{\theta} = \{\hat{\theta} : \theta_{\min} \leq \hat{\theta} \leq \theta_{\max}\} \quad (23)$$

$$\mathbf{P2} \quad \tilde{\theta}^T (\Gamma^{-1} \text{Proj}_{\hat{\theta}}(\Gamma\tau) - \tau) \leq 0, \quad \forall \tau \quad (24)$$

D. Controller Design

Now, we can apply the controller design technique developed in [13]. The design combines the adaptive backstepping [6] and discontinuous projection based ARC proposed in [9]. The main idea is to synthesize a virtual control law which will drive the error to a small residual ball. But, as in this case only a single state is available for measurement, the synthesized virtual control law will replace the reconstructed state at each step, and the state estimation error will be dealt with via robust feedback. Also, it should be noted that the use of discontinuous projection implies backstepping based on tuning functions cannot be used, and hence a stronger robust control law is needed to negate the effects of parameter estimation transients. For advantages of discontinuous projection based technique over smooth modifications of adaptive law like smooth projection, and other details regarding the controller design presented here, the reader is referred to [9].

Step 1: The derivative of the output tracking error $z_1 = y - y_r$ is given by,

$$\dot{z}_1 = x_2 - a_{n-1}y + a_{n-1}d_y + \dot{d}_y - \dot{y}_r \quad (25)$$

But, x_2 is not measured and is replaced by its estimate,

$$x_2 = \xi_{n,2} - \xi_{(2)}a + v_{(2)}\bar{b} + \psi_{(2)}c + \varepsilon_{x2} \quad (26)$$

where $\varepsilon_{x2} = \varepsilon_2 + \varepsilon_{u2}$ is the estimation error of x_2 , and

$$\begin{aligned} \xi_{(2)} &= [\xi_{n-1,2}, \dots, \xi_{0,2}] \quad v_{(2)} = [v_{m,2}, \dots, v_{0,2}] \\ \psi_{(2)} &= [\psi_{p,2}, \dots, \psi_{1,2}] \end{aligned} \quad (27)$$

in which $\bullet_{i,j}$ represents the j th element of $\bullet_i$. Substituting (27) back in (25), we obtain,

$$\dot{z}_1 = b_m^p v_{m,2} + \xi_{n,2} + \theta^T \bar{\omega} - \dot{y}_r + \bar{\Delta}_1 \quad (28)$$

where $\omega^T = [\xi_{(2)}, v_{(2)}, \psi_{(2)}] + e_1^{*T} y$, $\bar{\omega} = \omega - e_{n+1}^* v_{m,2}$, $\bar{\Delta}_1 = a_{n-1}d_y + \dot{d}_y + \varepsilon_2 + \varepsilon_{u2}$ and e_1^{*T} is the i th standard basis vector in $\mathbb{R}^{n+m+p+1}$. (28) suggests a natural choice for

the virtual input is $v_{m,2}$, which will be used for synthesizing the virtual control law α_1 ,

$$\begin{aligned} \alpha_1(y, \eta, \bar{\lambda}_{m+1}, \psi, \hat{\theta}, t) &= \alpha_{1a} + \alpha_{1s}, \\ \alpha_{1a} &= -\frac{1}{\bar{b}_m^p} \{\xi_{n,2} + \hat{\theta}^T \bar{\omega} - \dot{y}_r\} \end{aligned} \quad (29)$$

where $\bar{\lambda}_i = [\lambda_1, \dots, \lambda_i]^T$ obtained from (14). In (29), α_{1a} is the model compensation component of the control law used to achieve an improved model compensation through on-line parameter adaptation given by (21-22). Since, we assume the sign of b_m^p is known, without loss of generality, one can assume $b_m^p > 0$ and it is lower bounded by a non-zero positive constant i.e., $(b_m^p)_{\min} = (\theta_{n+1})_{\min} > 0$ where $(\theta_{n+1})_{\min}$ is independent of the failure pattern. Then, the projection mapping (23) guarantees that $\hat{b}_m^p \geq (b_m^p)_{\min} > 0$, which implies that the control law (29) is well defined. Let $z_2 = v_{m,2} - \alpha_1$ denote the input discrepancy. Substituting (29) into (28), we get

$$\dot{z}_1 = b_m^p(z_2 + \alpha_1) - \tilde{\theta}^T \phi_1 + \bar{\Delta}_1 \quad (30)$$

where $\phi_1 \triangleq \bar{\omega} + e_{n+1}^* \alpha_{1a}$.

Now we present the design of the robust component of the control law α_{1s} , which suppresses the potential destabilizing effect of parameter estimation transients, state-estimation error and as well as other bounded modeling errors.

$$\alpha_{1s} = \alpha_{1s1} + \alpha_{1s2} + \alpha_{1s3}, \quad \alpha_{1s1} = -\frac{1}{(b_m^p)_{\min}} k_{1s} z_1 \quad (31)$$

where k_{1s} is a nonlinear gain, such that,

$$k_{1s} \geq g_1 + \|C_{\phi_1} \Gamma \phi_1\|^2, \quad g_1 \geq 0 \quad (32)$$

in which C_{ϕ_1} is a positive definite constant diagonal matrix to be specified later. Substituting (31) into (28) gives

$$\begin{aligned} \dot{z}_1 &= b_m^p z_2 - \frac{b_m^p}{(b_m^p)_{\min}} k_{1s} z_1 + b_m^p (\alpha_{1s1} \\ &+ \alpha_{1s2}) - \tilde{\theta}^T \phi_1 + \bar{\Delta}_1 \end{aligned} \quad (33)$$

Next, we design α_{1s2} and α_{1s3} as follows. Consider the positive semi-definite (p.s.d) function $V_1 = \frac{1}{2} z_1^2$. Its time derivative along the trajectory of the system (33) satisfies,

$$\begin{aligned} \dot{V}_1 &\leq b_m^p z_1 z_2 - k_{1s} z_1^2 + z_1 (b_m^p \alpha_{1s2} \\ &- \tilde{\theta}^T \phi_1) + z_1 (b_m^p \alpha_{1s3} + \bar{\Delta}_1) \end{aligned} \quad (34)$$

From assumption **A5**, we have

$$\|\tilde{\theta}^T \phi_1\| \leq \|\theta_M\| \|\phi_1\| \quad (35)$$

where $\theta_M = \theta_{\max} - \theta_{\min}$. Thus, $\|\tilde{\theta}^T \phi_1\|$ is bounded by a known function, which ensures that there exists a robust control function satisfying the following conditions [12]:

$$\begin{aligned} (a) \quad & z_1 \{b_m^p \alpha_{1s2} - \tilde{\theta}^T \phi_1\} \leq \epsilon_{11} \\ (b) \quad & z_1 \alpha_{1s2} \leq 0 \end{aligned} \quad (36)$$

where ϵ_{11} is a positive design parameter.

Remark 2: Essentially, condition (a) of (36) shows that α_{1s2} is synthesized to attenuate the effect of parametric uncertainties $\tilde{\theta}$ with the level of control accuracy being

measured by ϵ_{11} . Condition (b) is to make sure that α_{1s2} is dissipative in nature so that it does not interfere with the functionality of adaptive control law α_{1a} . One smooth example of α_{1s2} satisfying (36) can be found in the following way. Let h_1 be any function satisfying

$$h_1 \geq \|\theta_M\|^2 \|\phi_1\|^2 \quad (37)$$

Then, α_{1s2} can be chosen as [11], [9],

$$\alpha_{1s2} = -\frac{h_1}{4(b_m^p)_{\min}\epsilon_{11}}z_1 \quad (38)$$

Similarly, from assumption A5 and (19-20), we can obtain,

$$|\bar{\Delta}_1| \leq \bar{\delta}_1(t) \triangleq |a_{n-1}|\delta_d(t) + \delta_f(t) + \delta_{\varepsilon 2}(t) + \varepsilon_2 \quad (39)$$

Note that $\bar{\delta}_1$ is an unknown but bounded function, and the same strategy as in (36) can be used to design a robust control law. However, since the bound of $\bar{\Delta}_1$ is not unknown, it is impossible to prespecify the level of control accuracy. So, a more relaxed requirement compared to the condition (a) of (36) is given by,

$$z_1\{b_m^p\alpha_{1s3} + \bar{\Delta}_1\} \leq \epsilon_{12}\bar{\delta}_1^2 \quad (40)$$

Remark 3: As for α_{1s2} , a choice of smooth α_{1s3} satisfying (40) is given by [10],

$$\alpha_{1s3} = -\frac{1}{4(b_m^p)_{\min}\epsilon_{12}}z_1 \quad (41)$$

Step 2: From (29), (14), (15) and rearrangement of (25-29), the derivative of α_1 can be written as,

$$\begin{aligned} \dot{\alpha}_1 &= \dot{\alpha}_{1c} + \dot{\alpha}_{1u} \\ \dot{\alpha}_{1c} &= \frac{\partial \alpha_1}{\partial y}(\xi_{n,2} + \hat{\theta}^T \omega) + \frac{\partial \alpha_1}{\partial \eta} \dot{\eta} + \sum_{j=1}^{m+1} \frac{\partial \alpha_1}{\partial \lambda_j} \dot{\lambda}_j \\ &+ \sum_{j=1}^{m+1} \frac{\partial \alpha_1}{\partial \psi_{j,2}} \dot{\psi}_{j,2} + \frac{\partial \alpha_1}{\partial t} \\ \dot{\alpha}_{1u} &= \frac{\partial \alpha_1}{\partial y}(-\tilde{\theta}^T \omega + \bar{\Delta}_1) + \frac{\partial \alpha_1}{\partial \hat{\theta}} \dot{\hat{\theta}} \end{aligned} \quad (42)$$

Using (13) and (14), $\dot{\alpha}_{1c}$ is calculable and can be used in the design of control functions. However, $\dot{\alpha}_{1u}$ is not calculable due to various uncertainties and hence, will be dealt with via robust feedback in this step. From (13) and (42), the derivative of the $z_2 = v_{m,2} - \alpha_1$ is

$$\dot{z}_2 = v_{m,3} - k_2 v_{m,1} - \dot{\alpha}_{1c} - \dot{\alpha}_{1u} \quad (43)$$

Now, consider the augmented p.s.d function $V_2 = V_1 + \frac{1}{2}z_2^2$. From (34) and (43), the derivative of V_2 is given by

$$\begin{aligned} \dot{V}_2 &\leq \dot{V}_1|_{\alpha_1} + z_2\{b_m^p z_1 + v_{m,3} - k_2 v_{m,1} \\ &- \dot{\alpha}_{1c} - \dot{\alpha}_{1u}\} \end{aligned} \quad (44)$$

where $\dot{V}_1|_{\alpha_1} = -k_{1s}z_1^2 + z_1(b_m^p\alpha_{1s2} - \tilde{\theta}_1^T\phi_1) + z_1(b_m^p\alpha_{1s3} + \bar{\Delta}_1)$. As in (29), the ARC control function α_2 for the virtual

control input $v_{m,3}$ in(43) consists of

$$\begin{aligned} \alpha_2(y, \eta, \bar{\lambda}_{m+2}, \psi, \hat{\theta}, t) &= \alpha_{2a} + \alpha_{2s} \\ \alpha_{2a} &= -\dot{b}_m^p z_1 + k_2 v_{m,1} + \dot{\alpha}_{1c} \\ \alpha_{2s} &= \alpha_{2s1} + \alpha_{2s2} + \alpha_{2s3} \quad \alpha_{2s1} = -k_{2s} z_2 \\ k_{2s} &\geq g_2 + \left\| \frac{\partial \alpha_1}{\partial \hat{\theta}} C_{\theta 2} \right\| + \left\| C_{\phi 2} \Gamma \phi_2 \right\|^2 \end{aligned} \quad (45)$$

where $g_2 > 0$ is a constant and $C_{\theta 2}$ and $C_{\phi 2}$ are positive definite constant diagonal matrices, α_{2s2} and α_{2s3} are robust control functions to be chosen later. Substituting (45) and (42) in (44), and using similar techniques as in (30), we have

$$\begin{aligned} \dot{V}_2 &\leq \dot{V}_1|_{\alpha_1} + z_2 z_3 - k_{2s} z_2^2 + z_2(\alpha_{2s2} - \tilde{\theta}^T \phi_2) \\ &+ z_2(\alpha_{2s3} + \bar{\Delta}_2) - z_2 \frac{\partial \alpha_1}{\partial \hat{\theta}} \dot{\hat{\theta}} \end{aligned} \quad (46)$$

where $z_3 = v_{m,3} - \alpha_2$ represents the input discrepancy and

$$\phi_2 = e_{n+1}^* z_1 - \frac{\partial \alpha_1}{\partial y} \omega, \quad \bar{\Delta}_2 = -\frac{\partial \alpha_1}{\partial y} \bar{\Delta}_1 \quad (47)$$

From (39), it follows that $\bar{\Delta}_2 \leq |\partial \alpha_1 / \partial y| \bar{\delta}_1$. Similar to (36) and (40), the robust control functions α_{2s2} and α_{2s3} are chosen to satisfy

$$\begin{aligned} (a) \quad &z_2(\alpha_{2s2} - \tilde{\theta}^T \phi_2) \leq \epsilon_{21} \\ (b) \quad &z_2(\alpha_{2s3} + \bar{\Delta}_2) \leq \epsilon_{22} \bar{\delta}_1^2 \\ (c) \quad &z_2 \alpha_{2s2} \leq 0, \quad z_2 \alpha_{2s3} \leq 0 \end{aligned} \quad (48)$$

where ϵ_{21} and ϵ_{22} are positive design parameters. As in step 1, α_{2s2} and α_{2s3} can be chosen as,

$$\alpha_{2s2} = -\frac{h_2}{4\epsilon_{21}}z_2, \quad \alpha_{2s3} = -\frac{1}{4\epsilon_{21}}\left(\frac{\partial \alpha_1}{\partial y}\right)^2 z_2 \quad (49)$$

where h_2 is any smooth function satisfying $h_2 \geq \|\theta_M\|^2 \|\phi_2\|^2$. From (34) and h_2 defined above, the derivative of V_2 satisfies

$$\begin{aligned} \dot{V}_2 &\leq z_2 z_3 - \sum_{j=1}^2 k_{js} z_j^2 + z_1(b_m^p \alpha_{1s2} - \tilde{\theta}_1^T \phi_1) \\ &+ z_1(b_m^p \alpha_{1s3} + \bar{\Delta}_1) + z_2(\alpha_{2s2} - \tilde{\theta}^T \phi_2) \\ &+ z_2(\alpha_{2s3} + \bar{\Delta}_2) - \frac{\partial \alpha_1}{\partial \hat{\theta}} \dot{\hat{\theta}} z_2 \end{aligned} \quad (50)$$

Step i ($3 \leq i < \rho$): Mathematical induction will be used to prove the general result for all the intermediate steps. At each step i , the ARC control function α_i will be constructed for virtual control input $v_{m,i+1}$. For any $j \in [3, i-1]$, let $z_j = v_{m,j} - \alpha_{j-1}$ and recursively design

$$\phi_j = -\frac{\partial \alpha_{j-1}}{\partial y} \omega, \quad \bar{\Delta}_j = -\frac{\partial \alpha_{j-1}}{\partial y} \bar{\Delta}_1 \quad (51)$$

Lemma 1: At step i , choose the desired ARC control function α_i as

$$\begin{aligned} \alpha_i(y, \eta, \bar{\lambda}_{m+i}, \psi, \hat{\theta}, t) &= \alpha_{ia} + \alpha_{is} \\ \alpha_{ia} &= -z_i + k_i v_{m,i} + \dot{\alpha}_{(i-1)c} \\ \alpha_{is} &= \alpha_{is1} + \alpha_{is2} + \alpha_{is3} \quad \alpha_{is1} = -k_{is} z_i \\ k_{is} &\geq g_i + \left\| \frac{\partial \alpha_{i-1}}{\partial \hat{\theta}} C_{\theta i} \right\| + \left\| C_{\phi i} \Gamma \phi_i \right\|^2 \end{aligned} \quad (52)$$

where $g_i > 0$ is a constant, and $C_{\theta i}$ and $C_{\phi i}$ are positive definite constant diagonal matrices, α_{is2} and α_{is3} are robust control functions satisfying,

$$\begin{aligned} (a) \quad & z_i(\alpha_{is2} - \tilde{\theta}^T \phi_i) \leq \epsilon_{i1} \\ (b) \quad & z_i(\alpha_{is3} + \bar{\Delta}_i) \leq \epsilon_{i2} \bar{\delta}_i^2 \\ (c) \quad & z_i \alpha_{is2} \leq 0, \quad z_i \alpha_{is3} \leq 0 \end{aligned} \quad (53)$$

and

$$\begin{aligned} \dot{\alpha}_{(i-1)c} &= \frac{\partial \alpha_{i-1}}{\partial y} (\xi_{n,2} + \hat{\theta}^T \omega) + \sum_{j=1}^{m+i+1} \frac{\partial \alpha_{i-1}}{\partial \lambda_j} \dot{\lambda}_j \\ &+ \frac{\partial \alpha_{i-1}}{\partial \eta} \dot{\eta} + \sum_{j=1}^p \frac{\partial \alpha_{i-1}}{\partial \psi_j} \dot{\psi}_j + \frac{\partial \alpha_{i-1}}{\partial t} \end{aligned} \quad (54)$$

Then, the i th error subsystem is

$$\begin{aligned} \dot{z}_i &= z_{i+1} - z_{i-1} - k_{is} z_i + (\alpha_{is2} - \tilde{\theta}^T \phi_i) \\ &+ (\alpha_{is3} + \bar{\Delta}_i) - \frac{\partial \alpha_{i-1}}{\partial \hat{\theta}} \dot{\hat{\theta}} \end{aligned} \quad (55)$$

and the derivative of the augmented p.s.d function $V_i = V_{i-1} + 1/2 z_i^2$ satisfies,

$$\begin{aligned} \dot{V}_i &\leq z_i z_{i+1} - \sum_{j=1}^i k_{js} z_j^2 + z_1 (b_m^p \alpha_{1s2} - \tilde{\theta}^T \phi_1) \\ &+ \sum_{j=2}^i z_j (b_m^p \alpha_{js2} - \tilde{\theta}^T \phi_j) + z_1 (b_m^p \alpha_{1s3} + \bar{\Delta}_1) \\ &+ \sum_{j=2}^i z_j (\alpha_{js3} + \bar{\Delta}_j) - \sum_{j=2}^i \frac{\partial \alpha_{j-1}}{\partial \hat{\theta}} \dot{\hat{\theta}} z_j \end{aligned} \quad (56)$$

The lemma can be easily verified by recursively writing the various expressions and substituting the expressions obtained in step 1 and 2.

Step ρ : In this final step, the actual control law u^* will be synthesized such that $v_{m,\rho}$ tracks the desired ARC control function $\alpha_{\rho-1}$. The derivative of z_ρ can be obtained as

$$\begin{aligned} \dot{z}_\rho &= v_{m,\rho+1} + u^* - k_\rho v_{m,1} - \dot{\alpha}_{(\rho-1)c} \\ &- \frac{\partial \alpha_{\rho-1}}{\partial y} (-\tilde{\theta}^T \omega + \bar{\Delta}_1) - \frac{\partial \alpha_{\rho-1}}{\partial \hat{\theta}} \dot{\hat{\theta}} \end{aligned} \quad (57)$$

If $v_{m,\rho+1} + u^*$ were the virtual input, (57) would have the same form as the intermediate step i . Therefore, the general form, (51-57) applies to step ρ . Since u is the actual control input, it can be chosen as,

$$u^* = \alpha_\rho - v_{m,\rho+1} \quad (58)$$

where α_ρ is given by (52). Then,

$$z_{\rho+1} = u^* + v_{m,\rho+1} - \alpha_\rho = 0 \quad (59)$$

Theorem 1: Let the parameter estimates be updated using adaptation law (21) in which τ is chosen as

$$\tau = \sum_{j=1}^{\rho} \phi_j z_j \quad (60)$$

If diagonal controller gain matrices $C_{\theta j}$ and $C_{\phi k}$ are chosen such that $c_{\phi kr}^2 \geq \frac{\rho}{4} \sum_{j=1}^{\rho} 1/c_{\theta jr}^2$, where $c_{\theta jr}$ and $c_{\phi kr}$ are the r th diagonal element of $C_{\theta j}$ and $C_{\phi k}$ respectively. Then, the control law (58) guarantess that,

- 1) In general the control input and all internal signals are bounded. Furthermore, V_ρ is bounded above by,

$$\begin{aligned} V_\rho(t) &\leq \exp(-\lambda_\rho t) V_\rho(0) \\ &+ \frac{\bar{\epsilon}_{\rho 1} + \bar{\epsilon}_{\rho 2} \|\bar{\delta}_1\|_{\inf}^2}{\lambda_\rho} [1 - \exp(-\lambda_\rho t)] \end{aligned} \quad (61)$$

where $\lambda_\rho = 2\min\{g_1, \dots, g_\rho\}$, $\bar{\epsilon}_{\rho 1} = \sum_{j=1}^{\rho} \epsilon_{j1}$, $\bar{\epsilon}_{\rho 2} = \sum_{j=1}^{\rho} \epsilon_{j2}$ and $\|\bar{\delta}_1\|_{\inf}^2$ stands for the infinity norm of $\bar{\delta}_1$.

- 2) If after a finite time t_0 , $\tilde{\Delta} = 0$ and $d_y = 0$ (i.e., in the presence of parametric uncertainties and modeled disturbance only) then, in addition to results in (1), asymptotic output tracking control is also achieved.

Proof: Proof of the theorem follows exactly the same steps as presented in [9] and [13]. The proof has been omitted here but, can be obtained from the authors upon request.

Remark 4: In context of actuator fault compensation, (1) guarantees that the jump in parameter values due to failed actuator does not interfere with the desired transient performance. The cumulative effect of loss in actuator efficiency is estimated and the model compensation part of the control law compensates for it. The estimation mismatch is dealt via the robust terms in the control law. Also, the accuracy can be improved by choosing suitable values of ϵ_{j1} and ϵ_{j2} .

Remark 5: It may appear that we have neglected the $\rho + 1$ to n states in the present analysis. But, due to the assumption of stable zero dynamics and bounded disturbances as well as actuator faults, it can be easily proved using standard adaptive control arguments that all internal signals remain bounded and do not interfere with the tracking performance.

IV. SIMULATIONS

For simulation purposes, we will use the linearized model of Boeing 747, as given in [5]. The details of the model and various assumptions can be found in [5].

Plant Model: The linearized model for the lateral motion of Boeing 747 can be represented as,

$$\begin{aligned} \dot{x}(t) &= Ax(t) + Bu(t), \quad y(t) = x_2(t) = y_r(t) \\ x(t) &= [\beta, y_r, p, \phi]^T, \quad B = [b_1, b_2, b_3] \end{aligned} \quad (62)$$

where, β is the side-slip angle, y_r is the yaw-rate, p is the roll rate, ϕ is the roll angle, y is the output which needs to follow the reference trajectory $r(t)$ and u is the control input vector consisting of three control signals representing three rudder servos $\delta_{r1}, \delta_{r2}, \delta_{r3}$. Note that the B matrix has been augmented by b_2 and b_3 for studying actuator failure compensation properties of the proposed algorithm. From the data provided in [5] for Boeing 747 in horizontal flight at 40,000 ft and nominal forward speed 774 ft/s, the

perturbation dynamics matrices are

$$\begin{aligned}
 A &= \begin{bmatrix} -0.0558 & -0.9968 & 0.0802 & 0.0415 \\ 0.598 & -0.115 & -0.0318 & 0 \\ -3.05 & 0.388 & -0.465 & 0 \\ 0 & 0.0805 & 1 & 0 \end{bmatrix} \\
 b_1 &= \begin{bmatrix} 0.00729 \\ -0.475 \\ 0.153 \\ 0 \end{bmatrix} \quad b_2 = \begin{bmatrix} 0.01 \\ -0.5 \\ 0.2 \\ 0 \end{bmatrix} \\
 b_3 &= \begin{bmatrix} 0.005 \\ -0.3 \\ 0.1 \\ 0 \end{bmatrix} \quad (63)
 \end{aligned}$$

It can be easily verified that this plant satisfies the assumptions A1, A2, A4 and A5.

Simulation results: Simulations are done using $r(t) = 0.02\sin(0.2t)$ as the reference signal for evaluating the ARC based fault compensation scheme. In the first set of simulations, the disturbances are assumed to be zero. In the next set of simulations, the disturbances are assumed to be nonzero and are given by $\Delta(y, t) = 0.0001\sin(2.1t)$, $d_y(t) = 0.0004\sin(4t)$. Two faults are introduced during the simulation: $u_2(t)$ fails at $t = 35$ seconds such that for $t \geq 35$ $\mu^1 = \text{diag}\{1, 0.25, 1\}$ and $u_3(t)$ fails at $t = 80$ seconds such that $\mu^2 = \text{diag}\{1, 0.25, 0.1\}$ for $t \geq 80$.

As can be seen from Fig. (1), the loss in actuator efficiency i.e., the jump in b_i^p is easily accommodated using the scheme proposed. Also, the superior performance of the ARC, owing to its underlying robust control law is clear. The differences are more striking in the Fig. (2), where the ARC based scheme effectively suppresses the disturbances.

Remark 7: The design of robust component of the ARC control law has already incorporated jumps in b_i^p parameter values, and hence, is better suited to handle the parametric uncertainties introduced due to actuator failures. This is also the reason that we need not prove separately the stability of the overall system when there is a jump from J_p to J_{p+1} failure pattern, as the robust control law is designed based on the worst case scenario.

Remark 8: These simulations demonstrate the strength of ARC based schemes in attenuating the effect of disturbance, modeling error, as well as, large parametric uncertainties. The tracking error is very small with the order of magnitude being 10^{-5} , which is also an order of magnitude less than what we obtain using conventional MRAC techniques. This becomes possible as the model compensation component can estimate the cumulative effect due to the loss in actuator efficiency effectively compensates for it and the robust part can deal with the corresponding estimation mismatch. Also, in ARC based approach, the trade-off between higher control effort and tracking accuracy is more transparent as both of these parameters can be adjusted by tuning ϵ_{j1} and ϵ_{j2} .

V. CONCLUSIONS

In this paper, an adaptive robust output feedback based ARC scheme is presented for unknown actuator fault ac-

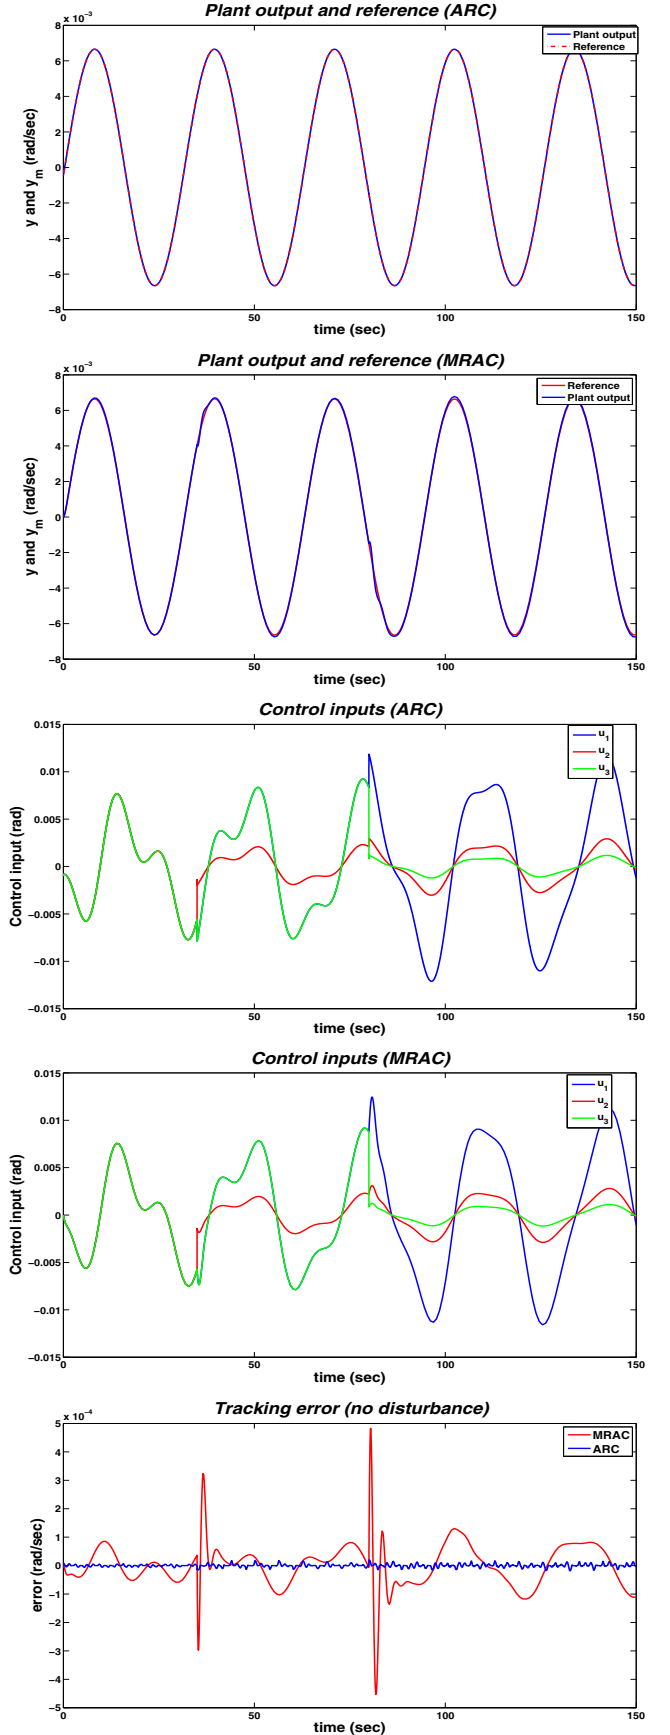


Fig. 1. System response, tracking error and control effort without disturbance.

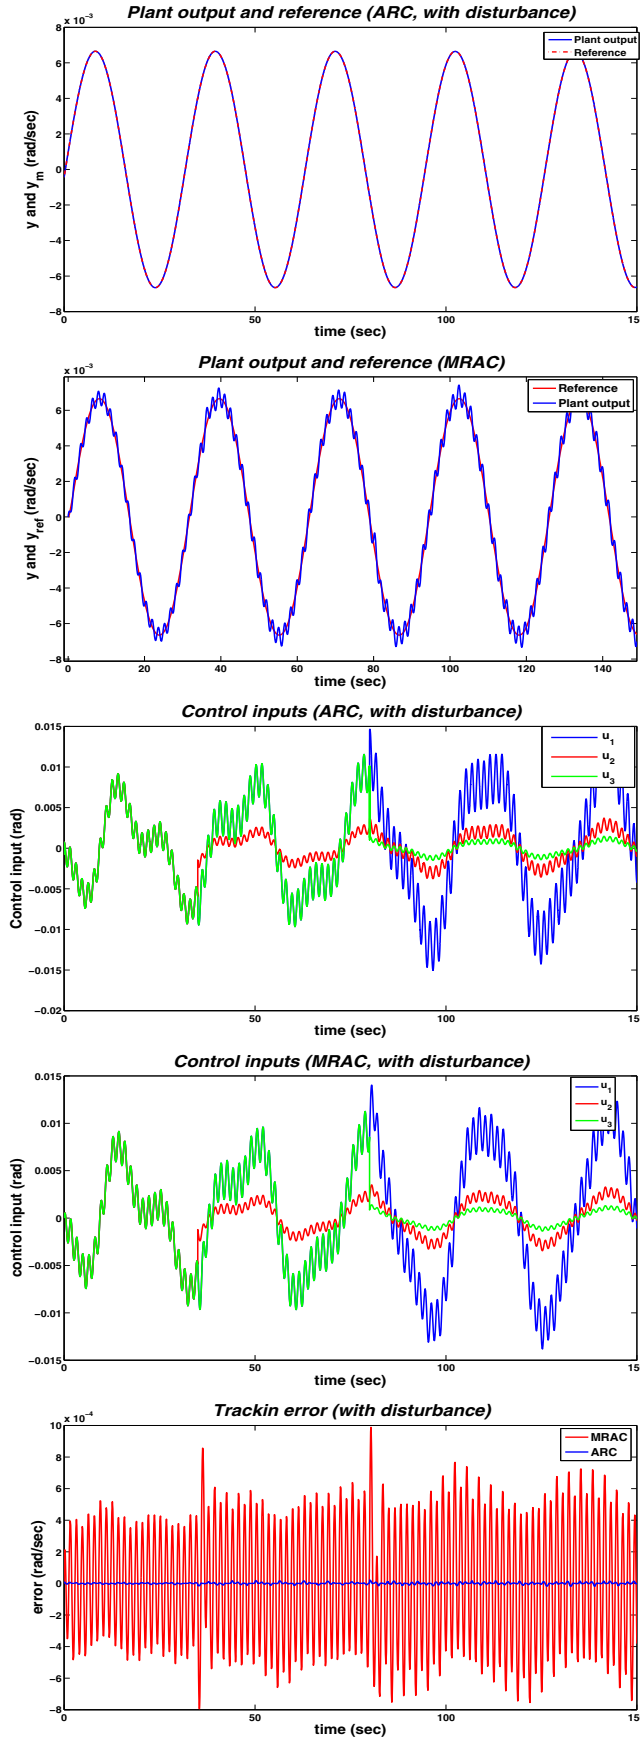


Fig. 2. System response, tracking error and control effort with disturbance.

commodation. The proposed scheme is applicable to any linear uncertain system. Adaptation and robust feedback are used simultaneously to maintain tracking performance in face of large parametric uncertainties introduced due to failing actuators, exogenous disturbances and other modeling uncertainties.

Simulation studies are done using a linearized model for lateral motion of Boeing 747 and they confirm the superior performance of the proposed fault accommodation scheme. In summary, some of the salient features of the fault accommodation scheme presented in this paper are,

- 1) capability to handle large parametric uncertainties due to unknown actuator failures with guaranteed transient performance
- 2) better disturbance rejection properties
- 3) guaranteed robust performance when adaptation is switched off
- 4) calculable upper bound for tracking error based on controller parameters and ability to achieve prespecified final tracking accuracy

We also performed simulation studies to compare the results obtained using conventional MRAC based technique and proposed ARC based scheme. The simulation results confirm the superior performance obtainable using the proposed scheme.

REFERENCES

- [1] H. Alwi and C. Edwards, "Application of fault tolerant control using sliding modes with on-line control allocation on a large civil aircraft," in *Proc. of the IEEE Multi-conference on Systems and Control*, Singapore, 2007.
- [2] B. D. O. Anderson, T. Brinsmead, D. Liberzon, and A. S. Morse, "Multiple model adaptive control with safe switching," *Int. J. of Adaptive Control and Signal Processing*, vol. 15, pp. 445–470, 2001.
- [3] M. Bodson and J. E. Groszkiewicz, "Multivariable adaptive algorithms for reconfigurable flight control," *IEEE Trans. on Control Systems Technology*, vol. 5, no. 2, pp. 217–229, 1997.
- [4] J. D. Boskovic and R. K. Mehra, "Stable multiple model adaptive flight control for accommodation of a large class of control effector failures," in *American Control Conference*, San Diego, California, 1999, pp. 1920–1924.
- [5] G. F. Franklin, J. D. Powell, and A. Emami-Naeni, *Feedback Control of Dynamics Systems*. Prentice Hall, 2002.
- [6] M. Krstic, I. Kanellakopoulos, and P. V. Kokotovic, *Nonlinear and Adaptive Control Design*. New York: Wiley, 1995.
- [7] F. Liao, J. L. Wang, and G. H. Yang, "Reliable robust flight tracking control: an lmi approach," *IEEE Trans. on Control System Technology*, vol. 10, no. 1, pp. 76–89, 2002.
- [8] G. Tao, S. Chen, and S. M. Joshi, "An adaptive actuator failure compensation controller using output feedback," *IEEE Trans. on Automat. Contr.*, vol. 47, no. 3, pp. 506–511, 2002.
- [9] B. Yao, "High performance adaptive robust control of nonlinear systems: a general framework and new schemes," in *Proc. of IEEE Conference on Decision and Control*, San Diego, 1997, pp. 2489–2494.
- [10] B. Yao, M. Al-Majed, and M. Tomizuka, "High performance robust motion control of machine tools: An adaptive robust control approach and comparative experiments," *IEEE/ASME Trans. on Mechatronics*, vol. 2, no. 2, pp. 63–76, 1997.
- [11] B. Yao and M. Tomizuka, "Adaptive robust control of SISO nonlinear systems in a semi-strict feedback form," *Automatica*, vol. 33, no. 5, pp. 893–900, 1997, (Part of the paper appeared in Proc. of 1995 American Control Conference, pp2500-2505, Seattle).

- [12] —, “Adaptive robust control of MIMO nonlinear systems in semi-strict feedback forms,” *Automatica*, vol. 37, no. 9, pp. 1305–1321, 2001, parts of the paper were presented in the *IEEE Conf. on Decision and Control*, pp2346-2351, 1995, and the *IFAC World Congress*, Vol. F, pp335-340, 1996.
- [13] B. Yao and L. Xu, “Output feedback adaptive robust control of uncertain linear systems with disturbances,” *ASME Journal of Dynamic Systems, Measurement, and Control*, 2006, (in press). Part of the paper appeared in the Proc. of 1999 American Control Conference, pp556-560.
- [14] J. Zhang and P. A. Ioannou, “Stable adaptive control for performance improvement,” in *Proc. of the 45th IEEE Conf. on Decision and Control*, San Diego, California, 2006, pp. 1087–1092.