

# Lecture 34

## Rayleigh Scattering, Mie Scattering

### 34.1 Rayleigh Scattering

Rayleigh scattering is a solution to the scattering of light by small particles. These particles are assumed to be much smaller than wavelength of light. Then a simple solution can be found by the method of asymptotic matching. This single scattering solution can be used to explain a number of physical phenomena in nature. For instance, why the sky is blue, the sunset so magnificently beautiful, how birds and insects can navigate without the help of a compass. By the same token, it can also be used to explain why the Vikings, as a seafaring people, could cross the Atlantic Ocean over to Iceland without the help of a magnetic compass.



Figure 34.1: The magnificent beauty of nature can be partly explained by Rayleigh scattering [182, 183].

When a ray of light impinges on an object, we model the incident light as a plane electromagnetic wave (see Figure 34.2). Without loss of generality, we can assume that the electromagnetic wave is polarized in the  $z$  direction and propagating in the  $x$  direction. We assume the particle to be a small spherical particle with permittivity  $\epsilon_s$  and radius  $a$ . Essentially, the particle sees a constant field as the plane wave impinges on it. In other words, the particle feels an almost electrostatic field in the incident field.

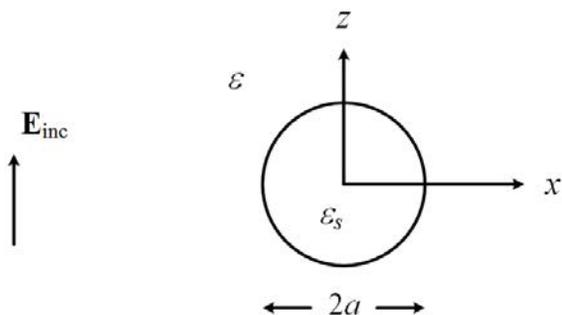


Figure 34.2: Geometry for studying the Rayleigh scattering problem.

### 34.1.1 Scattering by a Small Spherical Particle

The incident field polarizes the particle making it look like an electric dipole. Since the incident field is time harmonic, the small electric dipole will oscillate and radiate like a Hertzian dipole in the far field. First, we will look at the solution in the vicinity of the scatterer, namely, in the near field. Then we will motivate the form of the solution in the far field of the scatterer. Solving a boundary value problem by looking at the solutions in two different physical regimes, and then matching the solutions together is known as asymptotic matching.

A Hertzian dipole can be approximated by a small current source so that

$$\mathbf{J}(\mathbf{r}) = \hat{z}Il\delta(\mathbf{r}) \quad (34.1.1)$$

In the above, we can let the time-harmonic current  $I = dq/dt = j\omega q$

$$Il = j\omega ql = j\omega p \quad (34.1.2)$$

where the dipole moment  $p = ql$ . The vector potential  $\mathbf{A}$  due to a Hertzian dipole, after substituting (34.1.1), is

$$\begin{aligned} \mathbf{A}(\mathbf{r}) &= \frac{\mu}{4\pi} \iiint_V d\mathbf{r}' \frac{\mathbf{J}(\mathbf{r}')}{|\mathbf{r} - \mathbf{r}'|} e^{-j\beta|\mathbf{r} - \mathbf{r}'|} \\ &= \hat{z} \frac{\mu Il}{4\pi r} e^{-j\beta r} \end{aligned} \quad (34.1.3)$$

#### Near Field

From prior knowledge, we know that the electric field is given by  $\mathbf{E} = -j\omega\mathbf{A} - \nabla\Phi$ . From a dimensional analysis, the scalar potential term dominates over the vector potential term in the near field of the scatterer. Hence, we need to derive the corresponding scalar potential.

The scalar potential  $\Phi(\mathbf{r})$  is obtained from the Lorenz gauge that  $\nabla \cdot \mathbf{A} = -j\omega\mu\epsilon\Phi$ . Therefore,

$$\Phi(\mathbf{r}) = \frac{-1}{j\omega\mu\epsilon} \nabla \cdot \mathbf{A} = -\frac{Il}{j\omega\epsilon 4\pi} \frac{\partial}{\partial z} \frac{1}{r} e^{-j\beta r} \quad (34.1.4)$$

When we are close to the dipole, by assuming that  $\beta r \ll 1$ , we can use a quasi-static approximation about the potential.<sup>1</sup> Then

$$\frac{\partial}{\partial z} \frac{1}{r} e^{-j\beta r} \approx \frac{\partial}{\partial z} \frac{1}{r} = \frac{\partial r}{\partial z} \frac{\partial}{\partial r} \frac{1}{r} = -\frac{z}{r} \frac{1}{r^2} \quad (34.1.5)$$

or after using that  $z/r = \cos\theta$ ,

$$\Phi(\mathbf{r}) \approx \frac{ql}{4\pi\epsilon r^2} \cos\theta \quad (34.1.6)$$

---

<sup>1</sup>This is the same as ignoring retardation effect.

This dipole induced in the small particle is formed in response to the incident field. The incident field can be approximated by a constant local static electric field,

$$\mathbf{E}_{inc} = \hat{z}E_i \quad (34.1.7)$$

The corresponding electrostatic potential for the incident field is then<sup>2</sup>

$$\Phi_{inc} = -zE_i \quad (34.1.8)$$

so that  $\mathbf{E}_{inc} \approx -\nabla\Phi_{inc} = \hat{z}E_i$ , as  $\omega \rightarrow 0$ . The scattered dipole potential from the spherical particle in the vicinity of it is given by

$$\Phi_{sca} = E_s \frac{a^3}{r^2} \cos \theta \quad (34.1.9)$$

The electrostatic boundary value problem (BVP) has been previously solved and<sup>3</sup>

$$E_s = \frac{\varepsilon_s - \varepsilon}{\varepsilon_s + 2\varepsilon} E_i \quad (34.1.10)$$

Using (34.1.10) in (34.1.9), and comparing with (34.1.6), one can see that the dipole moment induced by the incident field is that

$$p = ql = 4\pi\varepsilon \frac{\varepsilon_s - \varepsilon}{\varepsilon_s + 2\varepsilon} a^3 E_i \quad (34.1.11)$$

### Far Field

In the far field of the Hertzian dipole, we can start with

$$\mathbf{E} = -j\omega\mathbf{A} - \nabla\Phi = -j\omega\mathbf{A} - \frac{1}{j\omega\mu\varepsilon} \nabla\nabla \cdot \mathbf{A} \quad (34.1.12)$$

But when we are in the far field,  $\mathbf{A}$  behaves like a spherical wave which in turn behaves like a local plane wave if one goes far enough. Therefore,  $\nabla \rightarrow -j\boldsymbol{\beta} = -j\beta\hat{r}$ . Using this approximation in (34.1.12), we arrive at

$$\mathbf{E} = -j\omega \left( \mathbf{A} - \frac{\boldsymbol{\beta}\boldsymbol{\beta}}{\beta^2} \cdot \mathbf{A} \right) = -j\omega(\mathbf{A} - \hat{r}\hat{r} \cdot \mathbf{A}) = -j\omega(\hat{\theta}A_\theta + \hat{\phi}A_\phi) \quad (34.1.13)$$

where we have used  $\hat{r} = \boldsymbol{\beta}/\beta$ .

### 34.1.2 Scattering Cross Section

From (34.1.3), we see that  $A_\phi = 0$  while

$$A_\theta = -\frac{j\omega\mu ql}{4\pi r} e^{-j\beta r} \sin \theta \quad (34.1.14)$$

<sup>2</sup>It is not easier to get here from electrodynamics. One needs vector spherical harmonics [184].

<sup>3</sup>It was one of the homework problems.

Consequently, using (34.1.11) for  $ql$ , we have in the far field that<sup>4</sup>

$$E_\theta \cong -j\omega A_\theta = -\frac{\omega^2 \mu q l}{4\pi r} e^{-j\beta r} \sin \theta = -\omega^2 \mu \varepsilon \left( \frac{\varepsilon_s - \varepsilon}{\varepsilon_s + 2\varepsilon} \right) \frac{a^3}{r} E_i e^{-j\beta r} \sin \theta \quad (34.1.15)$$

$$H_\phi \cong \sqrt{\frac{\varepsilon}{\mu}} E_\theta = \frac{1}{\eta} E_\theta \quad (34.1.16)$$

where  $\eta = \sqrt{\mu/\varepsilon}$ . The time-averaged Poynting vector is given by  $\langle \mathbf{S} \rangle = 1/2 \Re \{ \mathbf{E} \times \mathbf{H}^* \}$ . Therefore, the total scattered power is

$$P_s = \frac{1}{2} \int_0^\pi r^2 \sin \theta d\theta \int_0^{2\pi} d\phi E_\theta H_\phi^* \quad (34.1.17)$$

$$= \frac{1}{2\eta} \beta^4 \left( \frac{\varepsilon_s - \varepsilon}{\varepsilon_s + 2\varepsilon} \right)^2 \frac{a^6}{r^2} |E_i|^2 r^2 \left( \int_0^\pi \sin^3 \theta d\theta \right) 2\pi \quad (34.1.18)$$

But

$$\begin{aligned} \int_0^\pi \sin^3 \theta d\theta &= - \int_0^\pi \sin^2 \theta d \cos \theta = - \int_0^\pi (1 - \cos^2 \theta) d \cos \theta \\ &= - \int_1^{-1} (1 - x^2) dx = \frac{4}{3} \end{aligned} \quad (34.1.19)$$

Therefore

$$P_s = \frac{4\pi}{3\eta} \left( \frac{\varepsilon_s - \varepsilon}{\varepsilon_s + 2\varepsilon} \right)^2 \beta^4 a^6 |E_i|^2 \quad (34.1.20)$$

The scattering cross section is the effective area of a scatterer such that the total scattered power is proportional to the incident power density times the scattering cross section. As such it is defined as

$$\Sigma_s = \frac{P_s}{\frac{1}{2\eta} |E_i|^2} = \frac{8\pi a^2}{3} \left( \frac{\varepsilon_s - \varepsilon}{\varepsilon_s + 2\varepsilon} \right)^2 (\beta a)^4 \quad (34.1.21)$$

In other words,

$$P_s = \langle S_{\text{inc}} \rangle \times \Sigma_s$$

It is seen that the scattering cross section grows as the fourth power of frequency since  $\beta = \omega/c$ . The radiated field grows as the second power because it is proportional to the acceleration of the charges on the particle. The higher the frequency, the more the scattered power. this mechanism can be used to explain why the sky is blue. It also can be used to explain why sunset has a brilliant hue of red and orange. The above also explain the brilliant glitter of gold plasmonic nano-particles as discovered by ancient Roman artisans. For gold,

<sup>4</sup>The  $\omega^2$  dependence of the following function implies that the radiated electric field in the far zone is proportional to the acceleration of the charges on the dipole.

the medium resembles a plasma, and hence, we can have  $\varepsilon_s < 0$ , and the denominator can be very small.

Furthermore, since the far field scattered power density of this particle is

$$\langle S \rangle = \frac{1}{2\eta} E_\theta H_\phi^* \sim \sin^2 \theta \quad (34.1.22)$$

the scattering pattern of this small particle is not isotropic. In other words, these dipoles radiate predominantly in the broadside direction but not in their end-fire directions. Therefore, insects and sailors can use this to figure out where the sun is even in a cloudy day. In fact, it is like a rainbow: If the sun is rising or setting in the horizon, there will be a bow across the sky where the scattered field is predominantly linearly polarized.<sup>5</sup> Such a “sunstone” is shown in Figure 34.3.



Figure 34.3: A sunstone can indicate the polarization of the scattered light. From that, one can deduce where the sun is located (courtesy of Wikipedia).

### 34.1.3 Small Conductive Particle

The above analysis is for a small dielectric particle. The quasi-static analysis may not be valid for when the conductivity of the particle becomes very large. For instance, for a perfect electric conductor immersed in a time varying electromagnetic field, the magnetic field in the long wavelength limit induces eddy current in PEC sphere. Hence, in addition to an electric dipole component, a PEC sphere has a magnetic dipole component. The scattered field due to a tiny PEC sphere is a linear superposition of an electric and magnetic dipole components.

<sup>5</sup>You can go through a Gedanken experiment to convince yourself of such.

These two dipolar components have electric fields that cancel precisely at certain observation angle. This gives rise to deep null in the bi-static radar scattering cross-section (RCS)<sup>6</sup> of a PEC sphere as illustrated in Figure 34.4.

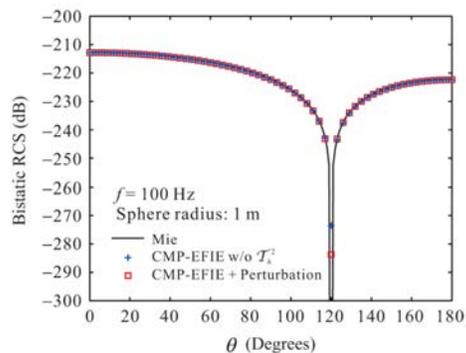


Figure 34.4: RCS (radar scattering cross section) of a small PEC scatterer (courtesy of Sheng et al. [185]).

## 34.2 Mie Scattering

When the size of the dipole becomes larger, quasi-static approximation is insufficient to approximate the solution. Then one has to solve the boundary value problem in its full glory usually called the full-wave theory or Mie theory [186, 187]. With this theory, the scattering cross section does not grow indefinitely with frequency. For a sphere of radius  $a$ , the scattering cross section becomes  $\pi a^2$  in the high-frequency limit. This physical feature of this plot is shown in Figure 34.5, and it also explains why the sky is not purple.

<sup>6</sup>Scattering cross section in microwave range is called an RCS due to its prevalent use in radar technology.

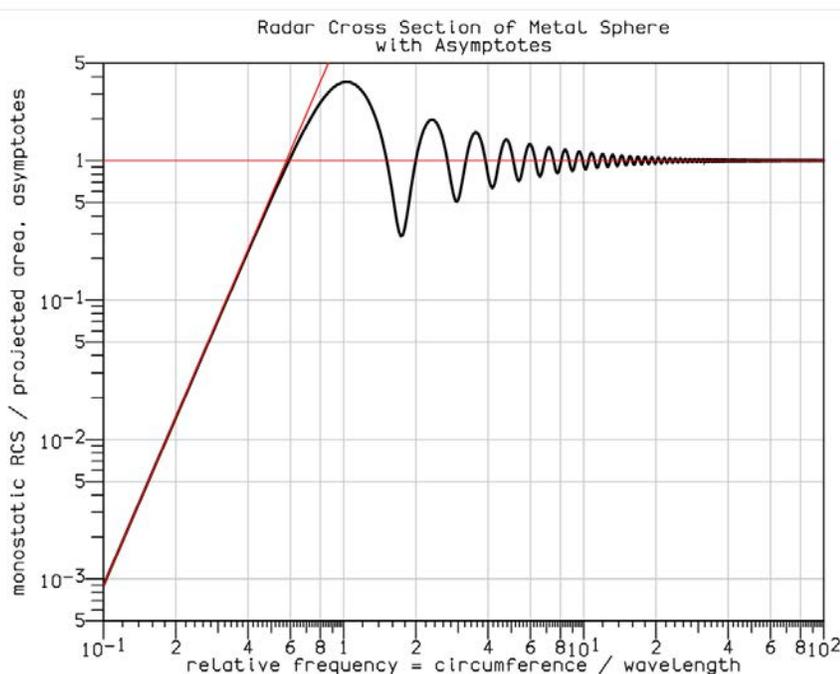


Figure 34.5: Radar cross section (RCS) calculated using Mie scattering theory [187].

### 34.2.1 Optical Theorem

Before we discuss Mie scattering solutions, let us discuss an amazing theorem called the optical theorem. This theorem says that the scattering cross section of a scatterer depends only on the forward scattering power density of the scatterer. In other words, if a plane wave is incident on a scatterer, the scatterer will scatter the incident power in all directions. But the total power scattered by the object is only dependent on the forward scattering power density of the object or scatterer. This amazing theorem is called the optical theorem, and the proof of this is given in J.D. Jackson's book [42].

The true physical reason for this is power orthogonality. Two plane waves can interact or exchange power with each other unless they share the same  $\mathbf{k}$  or  $\beta$  vector. This happens in orthogonal modes in waveguides [75, 188].

The scattering pattern of a scatterer for increasing frequency is shown in Figure 34.6. For Rayleigh scattering where the wavelength is long, the scattered power is distributed isotropically save for the doughnut shape of the radiation pattern, namely, the  $\sin^2(\theta)$  dependence. As the frequency increases, the power is scattered increasingly in the forward direction. The reason being that for very short wavelength, the scatterer looks like a disc to the incident wave, casting a shadow in the forward direction. Hence, there has to be scattered field in the forward direction to cancel the incident wave to cast this shadow.

In a nutshell, the scattering theorem is intuitively obvious for high-frequency scattering. The amazing part about this theorem is that it is true for all frequencies.

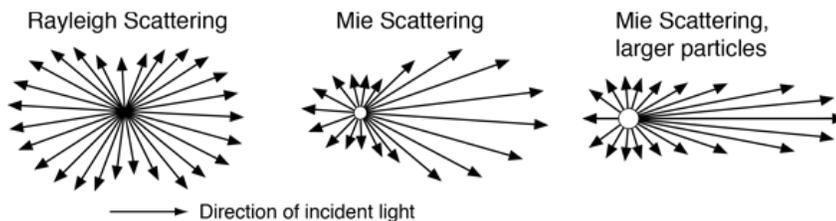


Figure 34.6: A particle scatters increasingly more in the forward direction as the frequency increases. Courtesy of hyperphysics.phy-astr.gsu.edu.

### 34.2.2 Mie Scattering by Spherical Harmonic Expansions

As mentioned before, as the wavelength becomes shorter, we need to solve the boundary value problem in its full glory without making any approximations. This can be done by using separation of variables and spherical harmonic expansions that will be discussed in the section.

The Mie scattering solution by a sphere is beyond the scope of this course.<sup>7</sup> This problem have to solved by the separation of variables in spherical coordinates. The separation of variables in spherical coordinates is not the only useful for Mie scattering, it is also useful for analyzing spherical cavity. So we will present the precursor knowledge so that you can read further into Mie scattering theory if you need to in the future.

### 34.2.3 Separation of Variables in Spherical Coordinates

To this end, we look at the scalar wave equation  $(\nabla^2 + \beta^2)\Psi(\mathbf{r}) = 0$  in spherical coordinates. A lookup table can be used to evaluate  $\nabla \cdot \nabla$ , or divergence of a gradient in spherical coordinates. Hence, the Helmholtz wave equation becomes<sup>8</sup>

$$\left( \frac{1}{r^2} \frac{\partial}{\partial r} r^2 \frac{\partial}{\partial r} + \frac{1}{r^2 \sin \theta} \frac{\partial}{\partial \theta} \sin \theta \frac{\partial}{\partial \theta} + \frac{1}{r^2 \sin^2 \theta} \frac{\partial^2}{\partial \phi^2} + \beta^2 \right) \Psi(\mathbf{r}) = 0 \quad (34.2.1)$$

Noting the  $\partial^2/\partial\phi^2$  derivative, by using separation of variables technique, we assume  $\Psi(\mathbf{r})$  to be

$$\Psi(\mathbf{r}) = F(r, \theta) e^{jm\phi} \quad (34.2.2)$$

<sup>7</sup>But it is treated in J.A. Kong's book [31] and Chapter 3 of W.C. Chew, Waves and Fields in Inhomogeneous Media [34] and many other textbooks [42, 59, 154].

<sup>8</sup>By quirk of mathematics, it turns out that the first term on the right-hand side below can be simplified by observing that  $\frac{1}{r^2} \frac{\partial}{\partial r} r^2 = \frac{1}{r} \frac{\partial}{\partial r} r$ .

where  $\frac{\partial^2}{\partial \phi^2} e^{jm\phi} = -m^2 e^{jm\phi}$ . Then (34.2.1) becomes

$$\left( \frac{1}{r^2} \frac{\partial}{\partial r} r^2 \frac{\partial}{\partial r} + \frac{1}{r^2 \sin \theta} \frac{\partial}{\partial \theta} \sin \theta \frac{\partial}{\partial \theta} - \frac{m^2}{r^2 \sin^2 \theta} + \beta^2 \right) F(r, \theta) = 0 \quad (34.2.3)$$

Again, by using the separation of variables, and letting further that

$$F(r, \theta) = b_n(\beta r) P_n^m(\cos \theta) \quad (34.2.4)$$

where we require that

$$\left\{ \frac{1}{\sin \theta} \frac{d}{d\theta} \sin \theta \frac{d}{d\theta} + \left[ n(n+1) - \frac{m^2}{\sin^2 \theta} \right] \right\} P_n^m(\cos \theta) = 0 \quad (34.2.5)$$

when  $P_n^m(\cos \theta)$  is the associate Legendre polynomial. Note that (34.2.5) is an eigenvalue problem, and  $|m| \leq |n|$ .

Consequently,  $b_n(kr)$  satisfies

$$\left[ \frac{1}{r^2} \frac{d}{dr} r^2 \frac{d}{dr} - \frac{n(n+1)}{r^2} + \beta^2 \right] b_n(\beta r) = 0 \quad (34.2.6)$$

The above is the spherical Bessel equation where  $b_n(\beta r)$  is either the spherical Bessel function  $j_n(\beta r)$ , spherical Neumann function  $n_n(\beta r)$ , or the spherical Hankel functions,  $h_n^{(1)}(\beta r)$  and  $h_n^{(2)}(\beta r)$ . The spherical functions are related to the cylindrical functions via [34, 43] <sup>9</sup>

$$b_n(\beta r) = \sqrt{\frac{\pi}{2\beta r}} B_{n+\frac{1}{2}}(\beta r) \quad (34.2.7)$$

It is customary to define the spherical harmonic as

$$Y_{nm}(\theta, \phi) = \sqrt{\frac{2n+1}{4\pi} \frac{(n-m)!}{(n+m)!}} P_n^m(\cos \theta) e^{jm\phi} \quad (34.2.8)$$

The above is normalized such that

$$Y_{n,-m}(\theta, \phi) = (-1)^m Y_{nm}^*(\theta, \phi) \quad (34.2.9)$$

and that

$$\int_0^{2\pi} d\phi \int_0^\pi \sin \theta d\theta Y_{n'm'}^*(\theta, \phi) Y_{nm}(\theta, \phi) = \delta_{n'n} \delta_{m'm} \quad (34.2.10)$$

These functions are also complete<sup>10</sup> if like Fourier series, so that

$$\sum_{n=0}^{\infty} \sum_{m=-n}^n Y_{nm}^*(\theta', \phi') Y_{nm}(\theta, \phi) = \delta(\phi - \phi') \delta(\cos \theta - \cos \theta') \quad (34.2.11)$$

<sup>9</sup>By a quirk of nature, the spherical Bessel functions needed for 3D wave equations are in fact simpler than cylindrical Bessel functions needed for 2D wave equation. One can say that 3D is real, but 2D is surreal.

<sup>10</sup>In a nutshell, a set of basis functions is complete in a subspace if any function in the same subspace can be expanded as a sum of these basis functions.

# Bibliography

- [1] J. A. Kong, *Theory of electromagnetic waves*. New York, Wiley-Interscience, 1975.
- [2] A. Einstein *et al.*, “On the electrodynamics of moving bodies,” *Annalen der Physik*, vol. 17, no. 891, p. 50, 1905.
- [3] P. A. M. Dirac, “The quantum theory of the emission and absorption of radiation,” *Proceedings of the Royal Society of London. Series A, Containing Papers of a Mathematical and Physical Character*, vol. 114, no. 767, pp. 243–265, 1927.
- [4] R. J. Glauber, “Coherent and incoherent states of the radiation field,” *Physical Review*, vol. 131, no. 6, p. 2766, 1963.
- [5] C.-N. Yang and R. L. Mills, “Conservation of isotopic spin and isotopic gauge invariance,” *Physical review*, vol. 96, no. 1, p. 191, 1954.
- [6] G. t’Hooft, *50 years of Yang-Mills theory*. World Scientific, 2005.
- [7] C. W. Misner, K. S. Thorne, and J. A. Wheeler, *Gravitation*. Princeton University Press, 2017.
- [8] F. Teixeira and W. C. Chew, “Differential forms, metrics, and the reflectionless absorption of electromagnetic waves,” *Journal of Electromagnetic Waves and Applications*, vol. 13, no. 5, pp. 665–686, 1999.
- [9] W. C. Chew, E. Michielssen, J.-M. Jin, and J. Song, *Fast and efficient algorithms in computational electromagnetics*. Artech House, Inc., 2001.
- [10] A. Volta, “On the electricity excited by the mere contact of conducting substances of different kinds. in a letter from Mr. Alexander Volta, FRS Professor of Natural Philosophy in the University of Pavia, to the Rt. Hon. Sir Joseph Banks, Bart. KBPR S,” *Philosophical transactions of the Royal Society of London*, no. 90, pp. 403–431, 1800.
- [11] A.-M. Ampère, *Exposé méthodique des phénomènes électro-dynamiques, et des lois de ces phénomènes*. Bachelier, 1823.
- [12] —, *Mémoire sur la théorie mathématique des phénomènes électro-dynamiques uniquement déduite de l’expérience: dans lequel se trouvent réunis les Mémoires que M. Ampère a communiqués à l’Académie royale des Sciences, dans les séances des 4 et*

26 décembre 1820, 10 juin 1822, 22 décembre 1823, 12 septembre et 21 novembre 1825. Bachelier, 1825.

- [13] B. Jones and M. Faraday, *The life and letters of Faraday*. Cambridge University Press, 2010, vol. 2.
- [14] G. Kirchhoff, “Ueber die auflösung der gleichungen, auf welche man bei der untersuchung der linearen vertheilung galvanischer ströme geführt wird,” *Annalen der Physik*, vol. 148, no. 12, pp. 497–508, 1847.
- [15] L. Weinberg, “Kirchhoff’s’ third and fourth laws’,” *IRE Transactions on Circuit Theory*, vol. 5, no. 1, pp. 8–30, 1958.
- [16] T. Standage, *The Victorian Internet: The remarkable story of the telegraph and the nineteenth century’s online pioneers*. Phoenix, 1998.
- [17] J. C. Maxwell, “A dynamical theory of the electromagnetic field,” *Philosophical transactions of the Royal Society of London*, no. 155, pp. 459–512, 1865.
- [18] H. Hertz, “On the finite velocity of propagation of electromagnetic actions,” *Electric Waves*, vol. 110, 1888.
- [19] M. Romer and I. B. Cohen, “Roemer and the first determination of the velocity of light (1676),” *Isis*, vol. 31, no. 2, pp. 327–379, 1940.
- [20] A. Arons and M. Peppard, “Einstein’s proposal of the photon concept—a translation of the Annalen der Physik paper of 1905,” *American Journal of Physics*, vol. 33, no. 5, pp. 367–374, 1965.
- [21] A. Pais, “Einstein and the quantum theory,” *Reviews of Modern Physics*, vol. 51, no. 4, p. 863, 1979.
- [22] M. Planck, “On the law of distribution of energy in the normal spectrum,” *Annalen der physik*, vol. 4, no. 553, p. 1, 1901.
- [23] Z. Peng, S. De Graaf, J. Tsai, and O. Astafiev, “Tuneable on-demand single-photon source in the microwave range,” *Nature communications*, vol. 7, p. 12588, 2016.
- [24] B. D. Gates, Q. Xu, M. Stewart, D. Ryan, C. G. Willson, and G. M. Whitesides, “New approaches to nanofabrication: molding, printing, and other techniques,” *Chemical reviews*, vol. 105, no. 4, pp. 1171–1196, 2005.
- [25] J. S. Bell, “The debate on the significance of his contributions to the foundations of quantum mechanics, Bells Theorem and the Foundations of Modern Physics (A. van der Merwe, F. Selleri, and G. Tarozzi, eds.),” 1992.
- [26] D. J. Griffiths and D. F. Schroeter, *Introduction to quantum mechanics*. Cambridge University Press, 2018.
- [27] C. Pickover, *Archimedes to Hawking: Laws of science and the great minds behind them*. Oxford University Press, 2008.

- [28] R. Resnick, J. Walker, and D. Halliday, *Fundamentals of physics*. John Wiley, 1988.
- [29] S. Ramo, J. R. Whinnery, and T. Duzer van, *Fields and waves in communication electronics, Third Edition*. John Wiley & Sons, Inc., 1995, also 1965, 1984.
- [30] J. L. De Lagrange, “Recherches d’arithmétique,” *Nouveaux Mémoires de l’Académie de Berlin*, 1773.
- [31] J. A. Kong, *Electromagnetic Wave Theory*. EMW Publishing, 2008, also 1985.
- [32] H. M. Schey, *Div, grad, curl, and all that: an informal text on vector calculus*. WW Norton New York, 2005.
- [33] R. P. Feynman, R. B. Leighton, and M. Sands, *The Feynman lectures on physics, Vols. I, II, & III: The new millennium edition*. Basic books, 2011, also 1963, 2006, vol. 1,2,3.
- [34] W. C. Chew, *Waves and fields in inhomogeneous media*. IEEE Press, 1995, also 1990.
- [35] V. J. Katz, “The history of Stokes’ theorem,” *Mathematics Magazine*, vol. 52, no. 3, pp. 146–156, 1979.
- [36] W. K. Panofsky and M. Phillips, *Classical electricity and magnetism*. Courier Corporation, 2005.
- [37] T. Lancaster and S. J. Blundell, *Quantum field theory for the gifted amateur*. OUP Oxford, 2014.
- [38] W. C. Chew, “Fields and waves: Lecture notes for ECE 350 at UIUC,” <https://engineering.purdue.edu/wcchew/ece350.html>, 1990.
- [39] C. M. Bender and S. A. Orszag, *Advanced mathematical methods for scientists and engineers I: Asymptotic methods and perturbation theory*. Springer Science & Business Media, 2013.
- [40] J. M. Crowley, *Fundamentals of applied electrostatics*. Krieger Publishing Company, 1986.
- [41] C. Balanis, *Advanced Engineering Electromagnetics*. Hoboken, NJ, USA: Wiley, 2012.
- [42] J. D. Jackson, *Classical electrodynamics*. John Wiley & Sons, 1999.
- [43] R. Courant and D. Hilbert, *Methods of Mathematical Physics, Volumes 1 and 2*. Interscience Publ., 1962.
- [44] L. Esaki and R. Tsu, “Superlattice and negative differential conductivity in semiconductors,” *IBM Journal of Research and Development*, vol. 14, no. 1, pp. 61–65, 1970.
- [45] E. Kudeki and D. C. Munson, *Analog Signals and Systems*. Upper Saddle River, NJ, USA: Pearson Prentice Hall, 2009.
- [46] A. V. Oppenheim and R. W. Schaffer, *Discrete-time signal processing*. Pearson Education, 2014.

- [47] R. F. Harrington, *Time-harmonic electromagnetic fields*. McGraw-Hill, 1961.
- [48] E. C. Jordan and K. G. Balmain, *Electromagnetic waves and radiating systems*. Prentice-Hall, 1968.
- [49] G. Agarwal, D. Pattanayak, and E. Wolf, "Electromagnetic fields in spatially dispersive media," *Physical Review B*, vol. 10, no. 4, p. 1447, 1974.
- [50] S. L. Chuang, *Physics of photonic devices*. John Wiley & Sons, 2012, vol. 80.
- [51] B. E. Saleh and M. C. Teich, *Fundamentals of photonics*. John Wiley & Sons, 2019.
- [52] M. Born and E. Wolf, *Principles of optics: electromagnetic theory of propagation, interference and diffraction of light*. Elsevier, 2013, also 1959 to 1986.
- [53] R. W. Boyd, *Nonlinear optics*. Elsevier, 2003.
- [54] Y.-R. Shen, *The principles of nonlinear optics*. New York, Wiley-Interscience, 1984.
- [55] N. Bloembergen, *Nonlinear optics*. World Scientific, 1996.
- [56] P. C. Krause, O. Wasynczuk, and S. D. Sudhoff, *Analysis of electric machinery*. McGraw-Hill New York, 1986.
- [57] A. E. Fitzgerald, C. Kingsley, S. D. Umans, and B. James, *Electric machinery*. McGraw-Hill New York, 2003, vol. 5.
- [58] M. A. Brown and R. C. Semelka, *MRI.: Basic Principles and Applications*. John Wiley & Sons, 2011.
- [59] C. A. Balanis, *Advanced engineering electromagnetics*. John Wiley & Sons, 1999, also 1989.
- [60] Wikipedia, "Lorentz force," [https://en.wikipedia.org/wiki/Lorentz\\_force/](https://en.wikipedia.org/wiki/Lorentz_force/), accessed: 2019-09-06.
- [61] R. O. Dendy, *Plasma physics: an introductory course*. Cambridge University Press, 1995.
- [62] P. Sen and W. C. Chew, "The frequency dependent dielectric and conductivity response of sedimentary rocks," *Journal of microwave power*, vol. 18, no. 1, pp. 95–105, 1983.
- [63] D. A. Miller, *Quantum Mechanics for Scientists and Engineers*. Cambridge, UK: Cambridge University Press, 2008.
- [64] W. C. Chew, "Quantum mechanics made simple: Lecture notes for ECE 487 at UIUC," <http://wcc Chew.ece.illinois.edu/chew/course/QMAll20161206.pdf>, 2016.
- [65] B. G. Streetman and S. Banerjee, *Solid state electronic devices*. Prentice hall Englewood Cliffs, NJ, 1995.

- [66] Smithsonian, “This 1600-year-old goblet shows that the romans were nanotechnology pioneers,” <https://www.smithsonianmag.com/history/this-1600-year-old-goblet-shows-that-the-romans-were-nanotechnology-pioneers-787224/>, accessed: 2019-09-06.
- [67] K. G. Budden, *Radio waves in the ionosphere*. Cambridge University Press, 2009.
- [68] R. Fitzpatrick, *Plasma physics: an introduction*. CRC Press, 2014.
- [69] G. Strang, *Introduction to linear algebra*. Wellesley-Cambridge Press Wellesley, MA, 1993, vol. 3.
- [70] K. C. Yeh and C.-H. Liu, “Radio wave scintillations in the ionosphere,” *Proceedings of the IEEE*, vol. 70, no. 4, pp. 324–360, 1982.
- [71] J. Kraus, *Electromagnetics*. McGraw-Hill, 1984, also 1953, 1973, 1981.
- [72] Wikipedia, “Circular polarization,” [https://en.wikipedia.org/wiki/Circular\\_polarization](https://en.wikipedia.org/wiki/Circular_polarization).
- [73] Q. Zhan, “Cylindrical vector beams: from mathematical concepts to applications,” *Advances in Optics and Photonics*, vol. 1, no. 1, pp. 1–57, 2009.
- [74] H. Haus, *Electromagnetic Noise and Quantum Optical Measurements*, ser. Advanced Texts in Physics. Springer Berlin Heidelberg, 2000.
- [75] W. C. Chew, “Lectures on theory of microwave and optical waveguides, for ECE 531 at UIUC,” <https://engineering.purdue.edu/wcchew/course/tqwAll20160215.pdf>, 2016.
- [76] L. Brillouin, *Wave propagation and group velocity*. Academic Press, 1960.
- [77] R. Plonsey and R. E. Collin, *Principles and applications of electromagnetic fields*. McGraw-Hill, 1961.
- [78] M. N. Sadiku, *Elements of electromagnetics*. Oxford University Press, 2014.
- [79] A. Wadhwa, A. L. Dal, and N. Malhotra, “Transmission media,” <https://www.slideshare.net/abhishekwadhw786/transmission-media-9416228>.
- [80] P. H. Smith, “Transmission line calculator,” *Electronics*, vol. 12, no. 1, pp. 29–31, 1939.
- [81] F. B. Hildebrand, *Advanced calculus for applications*. Prentice-Hall, 1962.
- [82] J. Schutt-Aine, “Experiment02-coaxial transmission line measurement using slotted line,” <http://emlab.uiuc.edu/ece451/ECE451Lab02.pdf>.
- [83] D. M. Pozar, E. J. K. Knapp, and J. B. Mead, “ECE 584 microwave engineering laboratory notebook,” [http://www.ecs.umass.edu/ece/ece584/ECE584\\_lab\\_manual.pdf](http://www.ecs.umass.edu/ece/ece584/ECE584_lab_manual.pdf), 2004.
- [84] R. E. Collin, *Field theory of guided waves*. McGraw-Hill, 1960.

- [85] Q. S. Liu, S. Sun, and W. C. Chew, "A potential-based integral equation method for low-frequency electromagnetic problems," *IEEE Transactions on Antennas and Propagation*, vol. 66, no. 3, pp. 1413–1426, 2018.
- [86] Wikipedia, "Snell's law," [https://en.wikipedia.org/wiki/Snell's\\_law](https://en.wikipedia.org/wiki/Snell's_law).
- [87] G. Tyras, *Radiation and propagation of electromagnetic waves*. Academic Press, 1969.
- [88] L. Brekhovskikh, *Waves in layered media*. Academic Press, 1980.
- [89] Scholarpedia, "Goos-hanchen effect," [http://www.scholarpedia.org/article/Goos-Hanchen\\_effect](http://www.scholarpedia.org/article/Goos-Hanchen_effect).
- [90] K. Kao and G. A. Hockham, "Dielectric-fibre surface waveguides for optical frequencies," in *Proceedings of the Institution of Electrical Engineers*, vol. 113, no. 7. IET, 1966, pp. 1151–1158.
- [91] E. Glytsis, "Slab waveguide fundamentals," [http://users.ntua.gr/eglytsis/IO/Slab-Waveguides\\_p.pdf](http://users.ntua.gr/eglytsis/IO/Slab-Waveguides_p.pdf), 2018.
- [92] Wikipedia, "Optical fiber," [https://en.wikipedia.org/wiki/Optical\\_fiber](https://en.wikipedia.org/wiki/Optical_fiber).
- [93] Atlantic Cable, "1869 indo-european cable," <https://atlantic-cable.com/Cables/1869IndoEur/index.htm>.
- [94] Wikipedia, "Submarine communications cable," [https://en.wikipedia.org/wiki/Submarine\\_communications\\_cable](https://en.wikipedia.org/wiki/Submarine_communications_cable).
- [95] D. Brewster, "On the laws which regulate the polarisation of light by reflexion from transparent bodies," *Philosophical Transactions of the Royal Society of London*, vol. 105, pp. 125–159, 1815.
- [96] Wikipedia, "Brewster's angle," [https://en.wikipedia.org/wiki/Brewster's\\_angle](https://en.wikipedia.org/wiki/Brewster's_angle).
- [97] H. Raether, "Surface plasmons on smooth surfaces," in *Surface plasmons on smooth and rough surfaces and on gratings*. Springer, 1988, pp. 4–39.
- [98] E. Kretschmann and H. Raether, "Radiative decay of non radiative surface plasmons excited by light," *Zeitschrift für Naturforschung A*, vol. 23, no. 12, pp. 2135–2136, 1968.
- [99] Wikipedia, "Surface plasmon," [https://en.wikipedia.org/wiki/Surface\\_plasmon](https://en.wikipedia.org/wiki/Surface_plasmon).
- [100] Wikimedia, "Gaussian wave packet," [https://commons.wikimedia.org/wiki/File:Gaussian\\_wave\\_packet.svg](https://commons.wikimedia.org/wiki/File:Gaussian_wave_packet.svg).
- [101] Wikipedia, "Charles K. Kao," [https://en.wikipedia.org/wiki/Charles\\_K.\\_Kao](https://en.wikipedia.org/wiki/Charles_K._Kao).
- [102] H. B. Callen and T. A. Welton, "Irreversibility and generalized noise," *Physical Review*, vol. 83, no. 1, p. 34, 1951.
- [103] R. Kubo, "The fluctuation-dissipation theorem," *Reports on progress in physics*, vol. 29, no. 1, p. 255, 1966.

- [104] C. Lee, S. Lee, and S. Chuang, "Plot of modal field distribution in rectangular and circular waveguides," *IEEE transactions on microwave theory and techniques*, vol. 33, no. 3, pp. 271–274, 1985.
- [105] W. C. Chew, *Waves and Fields in Inhomogeneous Media*. IEEE Press, 1996.
- [106] M. Abramowitz and I. A. Stegun, *Handbook of mathematical functions: with formulas, graphs, and mathematical tables*. Courier Corporation, 1965, vol. 55.
- [107] —, "Handbook of mathematical functions: with formulas, graphs, and mathematical tables," <http://people.math.sfu.ca/~cbm/aands/index.htm>.
- [108] W. C. Chew, W. Sha, and Q. I. Dai, "Green's dyadic, spectral function, local density of states, and fluctuation dissipation theorem," *arXiv preprint arXiv:1505.01586*, 2015.
- [109] Wikipedia, "Very Large Array," [https://en.wikipedia.org/wiki/Very\\_Large\\_Array](https://en.wikipedia.org/wiki/Very_Large_Array).
- [110] C. A. Balanis and E. Holzman, "Circular waveguides," *Encyclopedia of RF and Microwave Engineering*, 2005.
- [111] M. Al-Hakkak and Y. Lo, "Circular waveguides with anisotropic walls," *Electronics Letters*, vol. 6, no. 24, pp. 786–789, 1970.
- [112] Wikipedia, "Horn Antenna," [https://en.wikipedia.org/wiki/Horn\\_antenna](https://en.wikipedia.org/wiki/Horn_antenna).
- [113] P. Silvester and P. Benedek, "Microstrip discontinuity capacitances for right-angle bends, t junctions, and crossings," *IEEE Transactions on Microwave Theory and Techniques*, vol. 21, no. 5, pp. 341–346, 1973.
- [114] R. Garg and I. Bahl, "Microstrip discontinuities," *International Journal of Electronics Theoretical and Experimental*, vol. 45, no. 1, pp. 81–87, 1978.
- [115] P. Smith and E. Turner, "A bistable fabry-perot resonator," *Applied Physics Letters*, vol. 30, no. 6, pp. 280–281, 1977.
- [116] A. Yariv, *Optical electronics*. Saunders College Publ., 1991.
- [117] Wikipedia, "Klystron," <https://en.wikipedia.org/wiki/Klystron>.
- [118] —, "Magnetron," [https://en.wikipedia.org/wiki/Cavity\\_magnetron](https://en.wikipedia.org/wiki/Cavity_magnetron).
- [119] —, "Absorption Wavemeter," [https://en.wikipedia.org/wiki/Absorption\\_wavemeter](https://en.wikipedia.org/wiki/Absorption_wavemeter).
- [120] W. C. Chew, M. S. Tong, and B. Hu, "Integral equation methods for electromagnetic and elastic waves," *Synthesis Lectures on Computational Electromagnetics*, vol. 3, no. 1, pp. 1–241, 2008.
- [121] A. D. Yaghjian, "Reflections on Maxwell's treatise," *Progress In Electromagnetics Research*, vol. 149, pp. 217–249, 2014.
- [122] L. Nagel and D. Pederson, "Simulation program with integrated circuit emphasis," in *Midwest Symposium on Circuit Theory*, 1973.

- [123] S. A. Schelkunoff and H. T. Friis, *Antennas: theory and practice*. Wiley New York, 1952, vol. 639.
- [124] H. G. Schantz, "A brief history of uwb antennas," *IEEE Aerospace and Electronic Systems Magazine*, vol. 19, no. 4, pp. 22–26, 2004.
- [125] E. Kudeki, "Fields and Waves," <http://remote2.ece.illinois.edu/~erhan/FieldsWaves/ECE350lectures.html>.
- [126] Wikipedia, "Antenna Aperture," [https://en.wikipedia.org/wiki/Antenna\\_aperture](https://en.wikipedia.org/wiki/Antenna_aperture).
- [127] C. A. Balanis, *Antenna theory: analysis and design*. John Wiley & Sons, 2016.
- [128] R. W. P. King, G. S. Smith, M. Owens, and T. Wu, "Antennas in matter: Fundamentals, theory, and applications," *NASA STI/Recon Technical Report A*, vol. 81, 1981.
- [129] H. Yagi and S. Uda, "Projector of the sharpest beam of electric waves," *Proceedings of the Imperial Academy*, vol. 2, no. 2, pp. 49–52, 1926.
- [130] Wikipedia, "Yagi-Uda Antenna," [https://en.wikipedia.org/wiki/Yagi-Uda\\_antenna](https://en.wikipedia.org/wiki/Yagi-Uda_antenna).
- [131] Antenna-theory.com, "Slot Antenna," <http://www.antenna-theory.com/antennas/aperture/slot.php>.
- [132] A. D. Olver and P. J. Clarricoats, *Microwave horns and feeds*. IET, 1994, vol. 39.
- [133] B. Thomas, "Design of corrugated conical horns," *IEEE Transactions on Antennas and Propagation*, vol. 26, no. 2, pp. 367–372, 1978.
- [134] P. J. B. Clarricoats and A. D. Olver, *Corrugated horns for microwave antennas*. IET, 1984, no. 18.
- [135] P. Gibson, "The vivaldi aerial," in *1979 9th European Microwave Conference*. IEEE, 1979, pp. 101–105.
- [136] Wikipedia, "Vivaldi Antenna," [https://en.wikipedia.org/wiki/Vivaldi\\_antenna](https://en.wikipedia.org/wiki/Vivaldi_antenna).
- [137] —, "Cassegrain Antenna," [https://en.wikipedia.org/wiki/Cassegrain\\_antenna](https://en.wikipedia.org/wiki/Cassegrain_antenna).
- [138] —, "Cassegrain Reflector," [https://en.wikipedia.org/wiki/Cassegrain\\_reflector](https://en.wikipedia.org/wiki/Cassegrain_reflector).
- [139] W. A. Imbriale, S. S. Gao, and L. Boccia, *Space antenna handbook*. John Wiley & Sons, 2012.
- [140] J. A. Encinar, "Design of two-layer printed reflectarrays using patches of variable size," *IEEE Transactions on Antennas and Propagation*, vol. 49, no. 10, pp. 1403–1410, 2001.
- [141] D.-C. Chang and M.-C. Huang, "Microstrip reflectarray antenna with offset feed," *Electronics Letters*, vol. 28, no. 16, pp. 1489–1491, 1992.

- [142] G. Minatti, M. Faenzi, E. Martini, F. Caminita, P. De Vita, D. González-Ovejero, M. Sabbadini, and S. Maci, “Modulated metasurface antennas for space: Synthesis, analysis and realizations,” *IEEE Transactions on Antennas and Propagation*, vol. 63, no. 4, pp. 1288–1300, 2014.
- [143] X. Gao, X. Han, W.-P. Cao, H. O. Li, H. F. Ma, and T. J. Cui, “Ultrawideband and high-efficiency linear polarization converter based on double v-shaped metasurface,” *IEEE Transactions on Antennas and Propagation*, vol. 63, no. 8, pp. 3522–3530, 2015.
- [144] D. De Schweinitz and T. L. Frey Jr, “Artificial dielectric lens antenna,” Nov. 13 2001, US Patent 6,317,092.
- [145] K.-L. Wong, “Planar antennas for wireless communications,” *Microwave Journal*, vol. 46, no. 10, pp. 144–145, 2003.
- [146] H. Nakano, M. Yamazaki, and J. Yamauchi, “Electromagnetically coupled curl antenna,” *Electronics Letters*, vol. 33, no. 12, pp. 1003–1004, 1997.
- [147] K. Lee, K. Luk, K.-F. Tong, S. Shum, T. Huynh, and R. Lee, “Experimental and simulation studies of the coaxially fed U-slot rectangular patch antenna,” *IEE Proceedings-Microwaves, Antennas and Propagation*, vol. 144, no. 5, pp. 354–358, 1997.
- [148] K. Luk, C. Mak, Y. Chow, and K. Lee, “Broadband microstrip patch antenna,” *Electronics letters*, vol. 34, no. 15, pp. 1442–1443, 1998.
- [149] M. Bolic, D. Simplot-Ryl, and I. Stojmenovic, *RFID systems: research trends and challenges*. John Wiley & Sons, 2010.
- [150] D. M. Dobkin, S. M. Weigand, and N. Iyer, “Segmented magnetic antennas for near-field UHF RFID,” *Microwave Journal*, vol. 50, no. 6, p. 96, 2007.
- [151] Z. N. Chen, X. Qing, and H. L. Chung, “A universal UHF RFID reader antenna,” *IEEE transactions on microwave theory and techniques*, vol. 57, no. 5, pp. 1275–1282, 2009.
- [152] C.-T. Chen, *Linear system theory and design*. Oxford University Press, Inc., 1998.
- [153] S. H. Schot, “Eighty years of Sommerfeld’s radiation condition,” *Historia mathematica*, vol. 19, no. 4, pp. 385–401, 1992.
- [154] A. Ishimaru, *Electromagnetic wave propagation, radiation, and scattering from fundamentals to applications*. Wiley Online Library, 2017, also 1991.
- [155] A. E. H. Love, “I. the integration of the equations of propagation of electric waves,” *Philosophical Transactions of the Royal Society of London. Series A, Containing Papers of a Mathematical or Physical Character*, vol. 197, no. 287-299, pp. 1–45, 1901.
- [156] Wikipedia, “Christiaan Huygens,” [https://en.wikipedia.org/wiki/Christiaan\\_Huygens](https://en.wikipedia.org/wiki/Christiaan_Huygens).
- [157] —, “George Green (mathematician),” [https://en.wikipedia.org/wiki/George\\_Green\\_\(mathematician\)](https://en.wikipedia.org/wiki/George_Green_(mathematician)).

- [158] C.-T. Tai, *Dyadic Greens Functions in Electromagnetic Theory*. PA: International Textbook, Scranton, 1971.
- [159] —, *Dyadic Green functions in electromagnetic theory*. Institute of Electrical & Electronics Engineers (IEEE), 1994.
- [160] W. Franz, “Zur formulierung des huygensschen prinzipts,” *Zeitschrift für Naturforschung A*, vol. 3, no. 8-11, pp. 500–506, 1948.
- [161] J. A. Stratton, *Electromagnetic Theory*. McGraw-Hill Book Company, Inc., 1941.
- [162] J. D. Jackson, *Classical Electrodynamics*. John Wiley & Sons, 1962.
- [163] W. Meissner and R. Ochsenfeld, “Ein neuer effekt bei eintritt der supraleitfähigkeit,” *Naturwissenschaften*, vol. 21, no. 44, pp. 787–788, 1933.
- [164] Wikipedia, “Superconductivity,” <https://en.wikipedia.org/wiki/Superconductivity>.
- [165] D. Sievenpiper, L. Zhang, R. F. Broas, N. G. Alexopolous, and E. Yablonovitch, “High-impedance electromagnetic surfaces with a forbidden frequency band,” *IEEE Transactions on Microwave Theory and techniques*, vol. 47, no. 11, pp. 2059–2074, 1999.
- [166] Wikipedia, “Snell’s law,” [https://en.wikipedia.org/wiki/Snell's\\_law](https://en.wikipedia.org/wiki/Snell's_law).
- [167] H. Lamb, “On sommerfeld’s diffraction problem; and on reflection by a parabolic mirror,” *Proceedings of the London Mathematical Society*, vol. 2, no. 1, pp. 190–203, 1907.
- [168] W. J. Smith, *Modern optical engineering*. McGraw-Hill New York, 1966, vol. 3.
- [169] D. C. O’Shea, T. J. Suleski, A. D. Kathman, and D. W. Prather, *Diffraction optics: design, fabrication, and test*. Spie Press Bellingham, WA, 2004, vol. 62.
- [170] J. B. Keller and H. B. Keller, “Determination of reflected and transmitted fields by geometrical optics,” *JOSA*, vol. 40, no. 1, pp. 48–52, 1950.
- [171] G. A. Deschamps, “Ray techniques in electromagnetics,” *Proceedings of the IEEE*, vol. 60, no. 9, pp. 1022–1035, 1972.
- [172] R. G. Kouyoumjian and P. H. Pathak, “A uniform geometrical theory of diffraction for an edge in a perfectly conducting surface,” *Proceedings of the IEEE*, vol. 62, no. 11, pp. 1448–1461, 1974.
- [173] R. Kouyoumjian, “The geometrical theory of diffraction and its application,” in *Numerical and Asymptotic Techniques in Electromagnetics*. Springer, 1975, pp. 165–215.
- [174] S.-W. Lee and G. Deschamps, “A uniform asymptotic theory of electromagnetic diffraction by a curved wedge,” *IEEE Transactions on Antennas and Propagation*, vol. 24, no. 1, pp. 25–34, 1976.
- [175] Wikipedia, “Fermat’s principle,” [https://en.wikipedia.org/wiki/Fermat's\\_principle](https://en.wikipedia.org/wiki/Fermat's_principle).

- [176] N. Yu, P. Genevet, M. A. Kats, F. Aieta, J.-P. Tetienne, F. Capasso, and Z. Gaburro, “Light propagation with phase discontinuities: generalized laws of reflection and refraction,” *Science*, vol. 334, no. 6054, pp. 333–337, 2011.
- [177] A. Sommerfeld, *Partial differential equations in physics*. Academic Press, 1949, vol. 1.
- [178] R. Haberman, *Elementary applied partial differential equations*. Prentice Hall Englewood Cliffs, NJ, 1983, vol. 987.
- [179] G. A. Deschamps, “Gaussian beam as a bundle of complex rays,” *Electronics letters*, vol. 7, no. 23, pp. 684–685, 1971.
- [180] J. Enderlein and F. Pampaloni, “Unified operator approach for deriving hermite–gaussian and laguerre–gaussian laser modes,” *JOSA A*, vol. 21, no. 8, pp. 1553–1558, 2004.
- [181] D. L. Andrews, *Structured light and its applications: An introduction to phase-structured beams and nanoscale optical forces*. Academic Press, 2011.
- [182] J. W. Strutt, “Xv. on the light from the sky, its polarization and colour,” *The London, Edinburgh, and Dublin Philosophical Magazine and Journal of Science*, vol. 41, no. 271, pp. 107–120, 1871.
- [183] L. Rayleigh, “X. on the electromagnetic theory of light,” *The London, Edinburgh, and Dublin Philosophical Magazine and Journal of Science*, vol. 12, no. 73, pp. 81–101, 1881.
- [184] R. C. Wittmann, “Spherical wave operators and the translation formulas,” *IEEE Transactions on Antennas and Propagation*, vol. 36, no. 8, pp. 1078–1087, 1988.
- [185] S. Sun, Y. G. Liu, W. C. Chew, and Z. Ma, “Calderón multiplicative preconditioned efie with perturbation method,” *IEEE Transactions on Antennas and Propagation*, vol. 61, no. 1, pp. 247–255, 2012.
- [186] G. Mie, “Beiträge zur optik trüber medien, speziell kolloidaler metallösungen,” *Annalen der physik*, vol. 330, no. 3, pp. 377–445, 1908.
- [187] Wikipedia, “Mie scattering,” [https://en.wikipedia.org/wiki/Mie\\_scattering](https://en.wikipedia.org/wiki/Mie_scattering).
- [188] R. E. Collin, *Foundations for microwave engineering*. John Wiley & Sons, 2007, also 1966.
- [189] L. B. Felsen and N. Marcuvitz, *Radiation and scattering of waves*. John Wiley & Sons, 1994, also 1973, vol. 31.
- [190] P. P. Ewald, “Die berechnung optischer und elektrostatischer gitterpotentiale,” *Annalen der physik*, vol. 369, no. 3, pp. 253–287, 1921.
- [191] E. Whittaker and G. Watson, *A Course of Modern Analysis*. Cambridge Mathematical Library, 1927.

- [192] A. Sommerfeld, *Über die Ausbreitung der Wellen in der drahtlosen Telegraphie*. Verlag der Königlich Bayerischen Akademie der Wissenschaften, 1909.
- [193] J. Kong, "Electromagnetic fields due to dipole antennas over stratified anisotropic media," *Geophysics*, vol. 37, no. 6, pp. 985–996, 1972.