

Processing control structures

Friday, October 4, 13

Statement lists

- So far we have discussed generating code for one assignment statement
- Generating code for multiple statements is easy

$\text{stmt_list} \rightarrow \text{stmt stmt_list} \mid \lambda$

- Keep appending (or prepending) the code generated by a single statement to the code generated by the rest of the statement list
- What if statement is not an assignment?


Friday, October 4, 13

If statements

```
if <bool_expr_1> then
  <stmt_list_1>
elseif <bool_expr_2> then
  <stmt_list_2>
...
else
  <stmt_list_3>
endif
```

Friday, October 4, 13

If statements

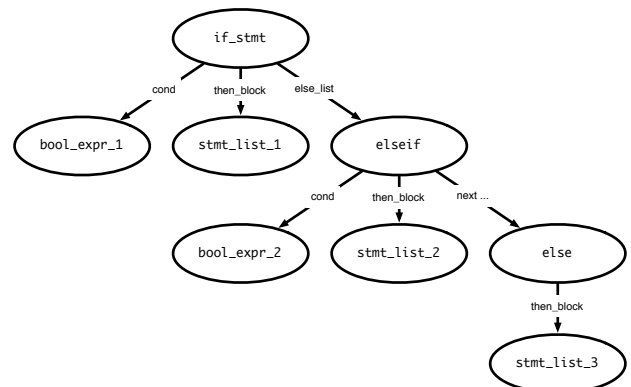

Friday, October 4, 13

Generating code for ifs

```
if <bool_expr_1> then
  <stmt_list_1>
elseif <bool_expr_2> then
  <stmt_list_2>
else
  <stmt_list_3>
endif
```

```
<code for bool_expr_1>
j<!op> ELSE_1
<code for stmt_list_1>
jmp OUT
ELSE_1:
  <code for bool_expr_2>
  j<!op> ELSE
  <code for stmt_list_2>
  jmp OUT
ELSE:
  <code for stmt_list_3>
OUT:
```

Friday, October 4, 13

Notes on code generation

- The <op> in j<!op> is dependent on the type of comparison you are doing in <bool_expr>
- When you generate JUMP instructions, you should also generate the appropriate LABELs
 - But you may not put the LABEL into the code immediately
 - e.g., the OUT label (when should you create this? When should you put this in code?)
 - Instead, generate the labels when you first process the if statement (i.e., before you process the children) so that it's available when necessary
- Remember: labels have to be unique!


Friday, October 4, 13

Processing Loops

Friday, October 4, 13

While loops

```
while <bool_expr> do
  <stmt_list>
end
```



Friday, October 4, 13

Generating code for do-while loops

```
do
  <stmt_list>
while <bool_expr>;
```

↓


```
LOOP:
  <stmt_list>
  <bool_expr>
  j<op> LOOP
OUT:
```

- Note that we j<op> instead of j<op> op>
- Jump when the expression is *true*
- Re-evaluate expression each time
- Question: what would code for "repeat until" loop look like?

Friday, October 4, 13

For loops

```
for (<init_stmt>; <bool_expr>; <incr_stmt>)
  <stmt_list>
end
```

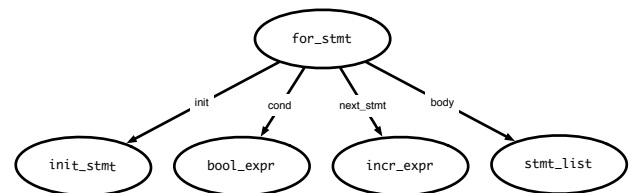

Friday, October 4, 13

Generating code: for loops

```
for (<init_stmt>; <bool_expr>; <incr_stmt>)
  <stmt_list>
end
```

↓

```
LOOP:
  <init_stmt>
  <bool_expr>
  j<op> OUT
  <stmt_list>
INCR:
  <incr_stmt>
  jmp LOOP
OUT:
```

- Execute init_stmt first
- Jump out of loop if bool_expr is false
- Execute incr_stmt after block, jump back to top of loop
- Question: Why do we have the INCR label?

Friday, October 4, 13

continue and break statements

```
for (<init_stmt>; <bool_expr>; <incr_stmt>)
  <stmt_list>
end
```

↓


```
LOOP:
  <init_stmt>
  <bool_expr>
  j<op> OUT
  <stmt_list>
INCR:
  <incr_stmt>
  jmp LOOP
OUT:
```

- Continue statements: skip past rest of block, perform incr_stmt and restart loop
- Break statements: jump out of loop (do not execute incr_stmt)
- Caveats:
 - Code for stmt_list is generated earlier—where do we jump?
 - Keep track of "loop depth" as you descend through AST

Friday, October 4, 13

Switch statements

```
switch (<expr>)
case <const_list>: <stmt_list>
case <const_list>: <stmt_list>
...
default: <stmt_list>
end
```

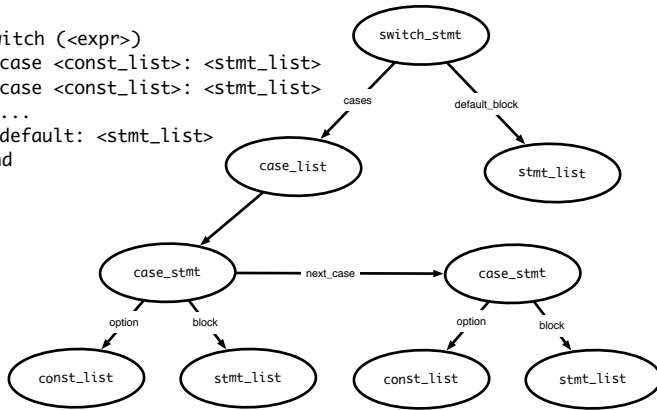

Friday, October 4, 13

Switch statements

```
switch (<expr>)
case <const_list>: <stmt_list>
case <const_list>: <stmt_list>
...
default: <stmt_list>
end
```

- Generated code should evaluate <expr> and make sure that some case matches the result
- Question: how to decide where to jump?

Friday, October 4, 13

Deciding where to jump

- Problem: do not know *which label* to jump to until switch expression is evaluated
- Use a jump table: an array indexed by case values, contains address to jump to
 - If table is not full (i.e., some possible values are skipped), can point to a default clause
 - If default clause does not exist, this can point to error code
- Problems
 - If table is sparse, wastes a lot of space
 - If many choices, table will be very large

Friday, October 4, 13

Jump table example

Consider the code:
(xxxx) is address of code)

Jump table has 6 entries:

Case x is
(0010) When 0: stmts
(0017) When 1: stmts
(0192) When 2: stmts
(0198) When 3: stmts;
(1000) When 5: stmts;
(1050) Else stmts;

Table only has one
Unnecessary row
(for choice 4)

0	JUMP 0010
1	JUMP 0017
2	JUMP 0192
3	JUMP 0198
4	JUMP 1050
5	JUMP 1000

Friday, October 4, 13

Jump table example

Consider the code:
(xxxx) is address of code)

Jump table has 6 entries:

Case x is
(0010) When 0: stmts0
(0017) When 1: stmts1
(0192) When 2: stmts2
(0198) When 3: stmts3
(1000) When 987: stmts4
(1050) When others: stmts5

Table only has 983 unnecessary rows.
Doesn't appear to be the right thing to do! **NOTE: table size is proportional to range of choice clauses, not number of clauses!**

0	JUMP 0010
1	JUMP 0017
2	JUMP 0192
3	JUMP 0198
4	JUMP 1050
...	JUMP 1050
986	JUMP 1050
987	JUMP 1000

Friday, October 4, 13

Do a binary search

Consider the code: ((xxxx) is address of code)

Jump table has 6 entries:

Case x is
(0010) When 0: stmts0
(0017) When 1: stmts1
(0192) When 2: stmts2
(0198) When 3: stmts3
(1000) When 987: stmts4
(1050) When others: stmts5

0	JUMP 0010
1	JUMP 0017
2	JUMP 0192
3	JUMP 0198
987	JUMP 1000

Perform a binary search on the table. If the entry is found, then jump to that offset. If the entry isn't found, jump to others clause. $O(\log n)$ time, n is the size of the table, for each jump.

Friday, October 4, 13

Linear search example

Consider the code:
(xxxx) Is offset of local
Code start from the
Jump instruction

Case x is

(0010) When 0: stmts
(0017) When 1: stmts
(0192) When 2: stmts
(1050) When others stmts;

If there are a small number of
choices, then do an in-line linear
search. A straightforward way to do
this is generate code analogous to an
IF THEN ELSE.

If (x == 0) then stmts1;
Elseif (x = 1) then stmts2;
Elseif (x = 2) then stmts3;
Else stmts4;

$O(n)$ time, n is the size of the table, for each jump.

Dealing with jump tables

```
switch (<expr>)  
  case <const_list>: <stmt_list>  
  case <const_list>: <stmt_list>  
  ...  
  default: <stmt_list>  
end
```

```
  <expr>  
  <code for jump table>  
LABEL0:  
  <stmt_list>  
LABEL1:  
  <stmt_list>  
  ...  
DEFAULT:  
  <stmt_list>  
OUT:
```

- Generate labels, code, then build jump table
- Put jump table after generated code
- Why do we need the OUT label?
- In case of break statements